


Ombra is the perfect combination of form and function with its sleek black stainless steel finish, capacitive touch controls, and optional hybrid baffle filters. Ombra features a powerful 600-CFM blower with our exclusive Airflow

Control Technology™ (ACT™) to meet local code requirements.


ACT™

| Min. - Max. CFM   | INTERNAL BLOWER STANDARD | INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™* |           |
|-------------------|--------------------------|--|-----------|
|                   | 200 - 600                | 200 - 390  | 200 - 290 |
| Min. - Max. Sones | 1 - 6                    | 1 - 4  | 1 - 3     |


\*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

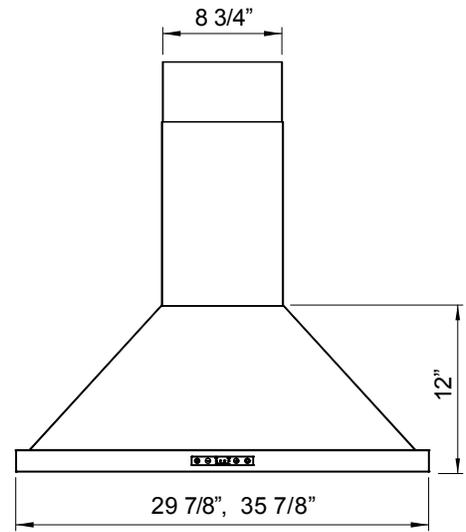

FRONT

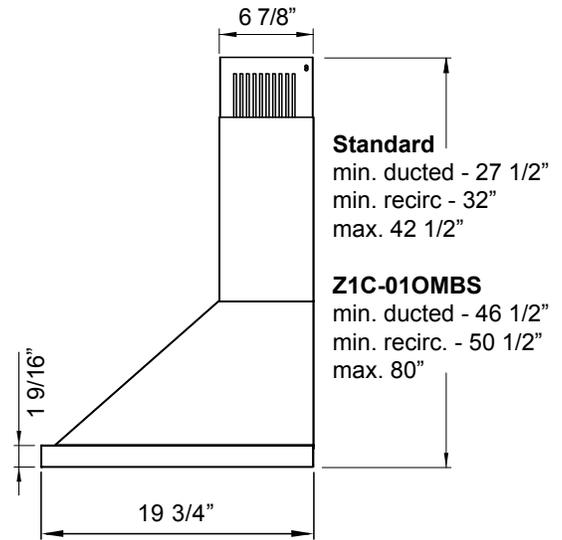

SIDE

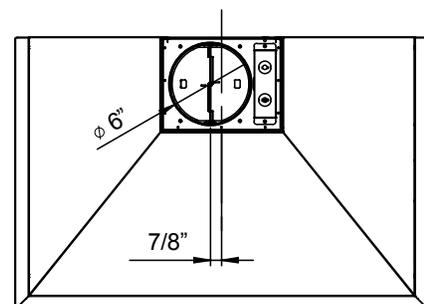

TOP

| MODEL                              | ZOM-E30ABS                  | ZOM-E36ABS                  |
|------------------------------------|-----------------------------|-----------------------------|
| Black Stainless Steel              |                             |                             |
| <b>Size</b>                        | 30"                         | 36"                         |
| <b>Blower CFM (Min. - Max.)</b>    | 200 - 600                   | 200 - 600                   |
| <b>Sones (Min. - Max.)</b>         | 1 - 6                       | 1 - 6                       |
| <b>ACT 390 CFM (Min. - Max.)</b>   | 200 - 390                   | 200 - 390                   |
| <b>ACT 390 Sones (Min. - Max.)</b> | 1 - 4                       | 1 - 4                       |
| <b>ACT 290 CFM (Min. - Max.)</b>   | 200 - 290                   | 200 - 290                   |
| <b>ACT 290 Sones (Min. - Max.)</b> | 1 - 3                       | 1 - 3                       |
| <b>FEATURES</b>                    |                             |                             |
| <b>ACT™ Technology</b>             | Yes                         | Yes                         |
| <b>Controls</b>                    | Capacitive Touch            | Capacitive Touch            |
| <b>Speed Levels</b>                | 4*                          | 4*                          |
| <b>Auto Delay-Off</b>              | Yes                         | Yes                         |
| <b>Lighting</b>                    | Halogen, 35W x2             | Halogen, 35W x2             |
| <b>Dual-Level Lighting</b>         | Yes                         | Yes                         |
| <b>Filters</b>                     | Aluminum Mesh x2            | Aluminum Mesh x2            |
| <b>Recirculating Option</b>        | Yes                         | Yes                         |
| <b>Extension Duct Cover Option</b> | Yes, Up to 12' Ceiling      | Yes, Up to 12' Ceiling      |
| <b>DUCT SPECIFICATIONS</b>         |                             |                             |
| <b>Vertical Internal Blower</b>    | 6" Round                    | 6" Round                    |
| <b>Horizontal Internal Blower</b>  | NA                          | NA                          |
| <b>AC POWER</b>                    | 120V, 60Hz at Max. 3.5A     | 120V, 60Hz at Max. 3.5A     |
| <b>OPTIONAL ACCESSORIES</b>        |                             |                             |
| <b>Recirculating Kit</b>           | ZRC-01OM                    | ZRC-01OM                    |
| <b>Duct Cover Extension</b>        | Z1C-01OMBS                  | Z1C-01OMBS                  |
| <b>Bloom™ GU10 LED</b>             | Z0B0040                     | Z0B0040                     |
| <b>Hybrid Baffle Filter Kit</b>    | Z0F-B002                    | Z0F-B002                    |
| <b>Make-Up Air Kit</b>             | MUA006A                     | MUA006A                     |
| <b>MOUNTING HEIGHT RANGE**</b>     | 26" - 34"                   | 26" - 34"                   |
| <b>WARRANTY</b>                    | 3 years parts, 1 year labor | 3 years parts, 1 year labor |

| CEILING HEIGHT          |                          | 8'          | 8.5'      | 9'          | 9.5'      | 10'       | 10.5'     | 11'       | 12'       |
|-------------------------|--------------------------|-------------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|
| STANDARD<br>DUCT COVER  | Ducted Mounting Height** | 26" - 33.5" | 26" - 34" | 29.5" - 34" | NA        | NA        | NA        | NA        | NA        |
|                         | Recirc Mounting Height** | 26" - 28.5" | 26" - 34" | 29.5" - 34" | NA        | NA        | NA        | NA        | NA        |
| EXTENSION<br>DUCT COVER | Ducted Mounting Height** | NA          | NA        | 26" - 30.5" | 26" - 34" | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |
|                         | Recirc Mounting Height** | NA          | NA        | 26" - 26"   | 26" - 32" | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™** AIRFLOW CONTROL TECHNOLOGY™ (ACT™)  
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

FEB18.0101

