

REFRIGERATION

FREEDOM® COLLECTION

Preserve every incredible moment in your culinary adventures with the New Freedom® Refrigeration Collection. Taking personalization to a new level, the Fresh Food, Freezer, and Wine collection introduces new custom exterior and interior features, meticulously crafted to let you flavor life the way you like it.

Our portfolio of custom panel models—available in 18-inch, 23.5-inch, 30-inch and 36-inch widths—offers the most design choices in the industry, allowing you to configure your own unique combination of bottom freezers, fresh food, freezer and wine preservation columns. And nothing beats the convenience of our pre-assembled bottom freezers, ready to install straight from the factory. Equipped with flat stainless steel panels and either Professional or Masterpiece® Handles set off by a removable stainless steel frame, these units deliver perfect built-in fit and aesthetics in a 24-inch or 25-inch deep cabinet.







Freedom® Collection **COMMON FEATURES**

★ COOL AIR FLOW TECHNOLOGY

Thermador refrigerators and freezers have never been more energy efficient. Cool Air Flow—upgraded with a new, quieter fan—is proprietary Thermador technology that optimizes and evenly distributes cold air throughout all parts of the unit.

OPEN DOOR ASSIST (NEW)

With the flexibility to either push or pull to open, new Thermador Auto Door Opening technology adds a luxurious touch as well as an option for a sleek, handleless design.

TFT DISPLAY (NEW)

A touch-screen TFT display panel controls settings, including individual temperature control, lighting and Open Door Assist.

THEATER LIGHTING (NEW)

See your ingredients in a new light. Theater-style, diffused lighting, ensures visibility while limiting hot spots.

SOFT-CLOSE DRAWERS (NEW)

Luxury you can feel. Revel in a gentle, quiet glide when you open or close interior drawers.

ALL-LEG LEVELING (NEW)

New all-leg leveling allows for quicker and faster installation.

DUAL EVAPORATOR & DUAL COMPRESSOR SYSTEMS

Each cooling compartment in our bottom freezer units—refrigerator and freezer—has its own evaporator and compressor to eliminate odor transfer and keep food fresher, longer, with better humidity and air flow.



Freedom® Collection

FRESH FOOD COLUMN

★ THERMAFRESH SYSTEM (NEW)

Controlled independently, the ThermaFresh System provides humidity control and temperature management where you need it most.



★ DELICATE PRODUCE BINS (NEW)

Avoid bruised produce and damaged herbs. Store your fresh-from-the-garden fruits and vegetables in luxury with removable Soft-Close Delicate Produce Bins.



★ FREE FLOW® COLD AIR SYSTEM

Free Flow Cold Air System adjusts the temperature of refrigeration doors to help keep items placed on interior shelves cool.



REDESIGNED HALF-GALLON BINS (NEW)

An all-new railing system offers a variety of placement options on the refrigerator door for redesigned half-gallon bins.

★ 23.5-INCH PRECISE FIT REFRIGERATION (NEW)

Specially designed 23.5" refrigeration is made for pairing with 18" and 24" freezer units to accommodate predetermined 42" and 48" spaces.



36-INCH REFRIGERATOR COLUMN (NEW)

With the new 36" Refrigerator Column, running out of room is not an option. Ample door space allows for personalized interior storage, helping you take your culinary creativity to new heights.

★ THERMADOR® EXCLUSIVE



Completely Customizable **INSIDE AND OUT**

Featuring first-of-its-kind innovation, the Thermador Freedom® Refrigeration Collection is completely customizable, both outside and in. Whether storing fresh herbs and produce from the farmer's market, or pickled vegetables and homemade jams, newly designed shelving and Delicate Produce Bins can be configured to suit your culinary lifestyle.



Daily Chef

Not sure where to start? All Thermador refrigerators include a configuration designed to fit a wide range of uses.

36" FRENCH DOOR



30" BOTTOM FREEZER



24" SINGLE COLUMN



Farmer's Market Enthusiast

Stock up on locally grown ingredients with the ideal setup for fresh herbs, fruits, vegetables, and pressed juices.

36" FRENCH DOOR



30" BOTTOM FREEZER



24" SINGLE COLUMN



Preservationist

The perfect setup for homemade jams, jellies, and pickled vegetables. Keep your creations fresh with plenty of door shelf space for finished jars.

36" FRENCH DOOR



30" BOTTOM FREEZER



24" SINGLE COLUMN



Colder and **BOLDER**

From preserving homemade soups and sauces to providing ice that gives beverages signature flair, redesigned Thermador Freezers are built to stand up to the needs of any exceptional cook. With a new bin design, theater lighting for improved visibility, Soft-Close drawers and unique Diamond Ice, Thermador Freezers ensure you never get left out of the cold.



Freedom® Collection

FREEZER COLUMN

★ DIAMOND ICE

An eye-catching addition to any party, Thermador Diamond Ice features a unique shape that keeps drinks cold. Use Diamond Ice in your favorite craft cocktails to make a lasting impression.

★ SUPERFREEZE®

Get cooler, faster. Whether you're just returning from the market or freezing for future use, Super Freeze brings food to its ideal preservation temperature after placing it in the freezer.

IN-DOOR DISPENSER

With intuitive touch controls and completely integrated installation, the Thermador In-Door Ice and Water Dispenser is sleeker than ever. Proximity Sensor and stunning lighting make for a captivating filtered water solution.

FULL-WIDTH ICE DRAWERS

Full-width ice drawers have the capacity to hold more ice to help prepare for larger gatherings.

36-INCH FREEZER COLUMN (NEW)

With the new 36" Freezer Column, ample interior space lets you preserve every incredible moment in your culinary adventures.

★ THERMADOR® EXCLUSIVE



*Leave no
pour less than
PERFECT*

Collect. Display. Share. And with exceptional storage, enjoy. An absolute must for wine connoisseurs, Thermador Wine Columns can hold up to 98 bottles and offer up to three zones to ensure your wines are stored at the optimum temperature and humidity. Diamond-shaped wooden dowels cradle each bottle, while a Presenter Shelf puts your favorites on display. Whether you're hosting a large gathering or simply enjoying a glass of wine at the end of the day, Thermador Wine Columns make every sip exceptional.



Freedom® Collection

WINE PRESERVATION

★ PRESENTER SHELF

Let your favorite bottles catch the eye. A newly designed Presenter Shelf made of Wenge wood and aluminum boasts a stylish design allowing you to place your favorite wines front and center.

★ DIAMOND DOWELS

Unique, diamond-shaped wooden dowels help control wine sediment by cradling bottles of every size for stability, as well as offer elegant presentation.

3-ZONE TEMPERATURE CONTROL

From Chardonnay to Pinot to Rosé, store all of your wines at the optimum temperature. The Thermador 24" Wine Column features UV glass and is equipped with three separate zones for individual temperature control.

HIDDEN RAILS

In these newly designed wine columns, the ball bearings and rails are completely out of sight. All you can see—and feel—is luxury.

★ THERMADOR® EXCLUSIVE



THE NEXT GENERATION OF REFRIGERATION

When it comes to refrigeration, culinary enthusiasts want more than mere preservation. They want personalization. Thermador® Culinary Preservation Centers offer an amazing array of refrigerator, freezer and wine center combinations that allow for flexibility and customization in the kitchen. Combine a French door bottom freezer with a wine column. Make a dramatic statement with wine storage flanked by freezer and refrigerator columns. Today's affluent consumers are leaving yesteryear's semi-flush products for fully-flush, integrated refrigeration to achieve the design they envision. Culinary Preservation Centers offer configuration possibilities that are an exciting departure from the rigid conformity of side-by-side replacement options. Be inspired.

EXPERIENCE THE FREEDOM TO DO MORE WITH THERMADOR.



The Ultimate Culinary Preservation Centers

EXCLUSIVE DETAILS



ULTIMATE ENTERTAINER

- 30-Inch Fresh Food
- 24-Inch Wine Column
- 30-Inch Fresh Food/Freezer



WEEKEND ENTERTAINER

- 30-Inch Fresh Food
- 18-Inch Wine Column
- 30-Inch Fresh Food/Freezer



HOLIDAY ENTERTAINER

- 36-Inch Side-Swing Door Fresh Food/Freezer
- 24-Inch Wine Column




ORGANIC FAMILY

- 36-Inch French Door Fresh Food/Freezer
- 18-Inch Wine Column



SOCIAL ENTERTAINER

- 36-Inch French Door Fresh Food/Freezer
- 24-Inch Wine Column

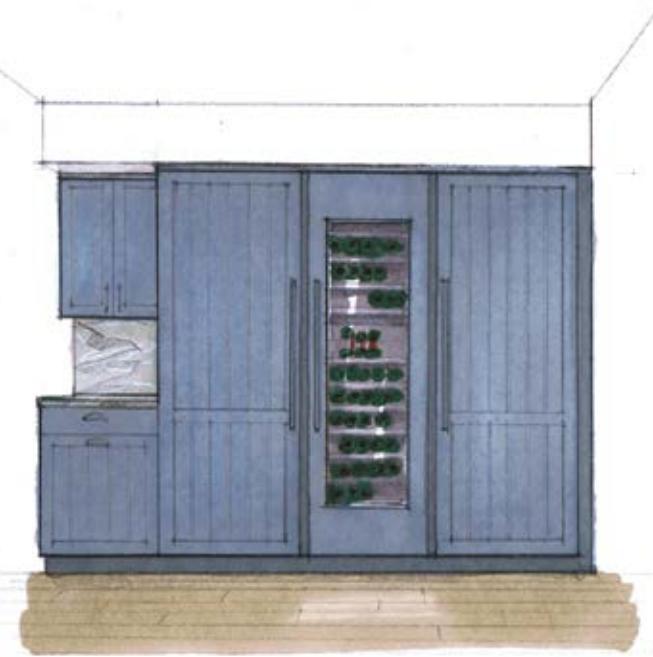

CONTEMPORARY FAMILY

- 30-Inch Fresh Food
- 24-Inch Wine Column
- 36-Inch Fresh Food/Freezer



MARKET FRESH ENTERTAINER

- 36-Inch Side-swing Door Fresh Food/Freezer
- 18-Inch Wine Column



EVERYDAY COOK

- 36-Inch French Door Fresh Food/Freezer

**URBAN FAMILY**

- 24-Inch Fresh Food
- 18-Inch Freezer

**WEEKDAY ENTERTAINER**

- 30-Inch Fresh Food
- 18-Inch Freezer

**HEALTHY FAMILY**

- 36-Inch Side-swing Door Fresh Food/Freezer

The Complete **FREEDOM® COLLECTION**

Newly redesigned in 2017, the Thermador Freedom Refrigeration Collection offers the ultimate in personalized preservation. Choose from a variety of sizes, standout stainless steel or custom paneling with options for a handleless, push-to-open design, as well as interior configuration options to store everything from delicate produce to jarred preserves.





BUILD YOUR OWN CUSTOM COLUMN

Our award winning Freedom Collection offers customized columns in four simple steps.

1. Choose your unit: Fresh Food, Freezer, Bottom Freezer or Wine Preservation Column.

2. Choose your panel: Flush for a fully integrated look, or custom panel for seamless integration with the rest of your cabinetry.



Flush Panel



Custom Panel

3. Choose your handle: Masterpiece Series, Professional Series, or custom handles. See page 375 for details.



Professional Series



Masterpiece Series



Professional Series - Classic



Masterpiece Series - Classic

4. Customize your interior with various storage options to fit your lifestyle, including produce railings and bins. See page 375 for details.

Visit Thermador.com for details on building your custom column.

T23IR900SP

23.5-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Temperature Controlled Drawer | 32°F (0°C) to 46°F (8°C) |
| Deli Drawer | Just above 32°F (0°C) |
| Super Cool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | 45°F (7°C) |

GENERAL PROPERTIES

| | |
|--|---|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 4 |
| Adjustable Shelves | 3 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature and Humidity Controlled Drawer | 1 |
| General Use Drawer | 1 |
| Door Bins | 2 |
| Gallon Door Bins | 1 |
| Delicate Produce Bins | 2 Small |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 13 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 13 cu. ft. |

PERFORMANCE

| | |
|--|-----|
| Dedicated Evaporator & Compressor System | Yes |
| Freeflow® Cold Air System | Yes |
| SuperCool | Yes |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 180 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 23 1/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 23 1/2" x 25" |
| Net / Gross Weight (lbs) | 319 / 342 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 281 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T24IR900SP

24-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermoFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Temperature Controlled Drawer | 32°F (0°C) to 46°F (8°C) |
| Deli Drawer | Just above 32°F (0°C) |
| Super Cool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | 45°F (7°C) |

GENERAL PROPERTIES

| | |
|--|---|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 4 |
| Adjustable Shelves | 3 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature and Humidity Controlled Drawer | 1 |
| General Use Drawer | 1 |
| Door Bins | 2 |
| Gallon Door Bins | 1 |
| Delicate Produce Bins | 2 Small |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 13 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 13 cu. ft. |

PERFORMANCE

| | |
|--|-----|
| Dedicated Evaporator & Compressor System | Yes |
| Freeflow® Cold Air System | Yes |
| SuperCool | Yes |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 180 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 23 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 24" x 25" |
| Net / Gross Weight (lbs) | 319 / 342 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 264 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T30IR900SP

30-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Temperature Controlled Drawer | 32°F (0°C) to 46°F (8°C) |
| Deli Drawer | Just above 32°F (0°C) |
| Super Cool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | 45°F (7°C) |

GENERAL PROPERTIES

| | |
|--|---|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 4 |
| Adjustable Shelves | 3 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature and Humidity Controlled Drawer | 1 |
| General Use Drawer | 1 |
| Door Bins | 2 |
| Gallon Door Bins | 1 |
| Delicate Produce Bins | 2 Large |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 16.8 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 16.8 cu. ft. |

PERFORMANCE

| | |
|--|-----|
| Dedicated Evaporator & Compressor System | Yes |
| Freeflow® Cold Air System | Yes |
| SuperCool | Yes |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 180 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 29 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 30" x 25" |
| Net / Gross Weight (lbs) | 344 / 368 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 289 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T36IR900SP

36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY


Thermador


FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermoFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Temperature Controlled Drawer | 32°F (0°C) to 46°F (8°C) |
| Deli Drawer | Just above 32°F (0°C) |
| Super Cool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | 45°F (7°C) |

GENERAL PROPERTIES

| | |
|--|---|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 4 |
| Adjustable Shelves | 3 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature and Humidity Controlled Drawer | 1 |
| General Use Drawer | 1 |
| Door Bins | 2 |
| Gallon Door Bins | 1 |
| Delicate Produce Bins | 1 Small, 2 Large |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 20.6 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 20.6 cu. ft. |

PERFORMANCE

| | |
|--|-----|
| Dedicated Evaporator & Compressor System | Yes |
| Freeflow® Cold Air System | Yes |
| SuperCool | Yes |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 180 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 462 / 491 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 313 kWh |

*Height adjustable + / - 1/2" (+ / -13 mm)

T18ID900LP

18-INCH BUILT-IN FREEZER COLUMN WITH ICE & WATER DISPENSER

FREEDOM® COLLECTION, PANEL-READY, LEFT-HAND DOOR SWING

Thermador 



Also Available In:

T18ID900RP – Right-Hand Door Swing

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 2 |
| Adjustable Shelves | 2 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 0 |
| External LED Proximity Sensor | Yes |
| Oversized Dispenser Opening | Yes |
| Chilled Water, Crushed and Cubed Ice | Yes |
| Rapid Water Replenishment System | Yes |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|-------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 7.8 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 7.8 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 506W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 17 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 18" x 25" |
| Net / Gross Weight (lbs) | 287 / 307 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 428 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T18ID900RP

18-INCH BUILT-IN FREEZER COLUMN WITH
ICE & WATER DISPENSER

FREEDOM® COLLECTION, PANEL-READY, RIGHT-HAND DOOR SWING


Thermador


Also Available In:

T18ID900LP – Left-Hand Door Swing

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 2 |
| Adjustable Shelves | 2 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 0 |
| External LED Proximity Sensor | Yes |
| Oversized Dispenser Opening | Yes |
| Chilled Water, Crushed and Cubed Ice | Yes |
| Rapid Water Replenishment System | Yes |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|-------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 7.8 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 7.8 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 506W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 17 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 18" x 25" |
| Net / Gross Weight (lbs) | 287 / 307 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 428 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T24ID900LP

24-INCH BUILT-IN FREEZER COLUMN WITH ICE & WATER DISPENSER

FREEDOM® COLLECTION, PANEL-READY, LEFT-HAND DOOR SWING

Thermador 



Also Available In:

T24ID900RP – Right-Hand Door Swing

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 2 |
| Adjustable Shelves | 2 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 0 |
| External LED Proximity Sensor | Yes |
| Oversized Dispenser Opening | Yes |
| Chilled Water, Crushed and Cubed Ice | Yes |
| Rapid Water Replenishment System | Yes |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 11.2 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 11.2 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 565 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-----------------------|
| Appliance Dimensions (H x W x D) (in.) | 84" * x 23 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 24" x 25" |
| Net / Gross Weight (lbs) | 333 / 355 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 457 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T24ID900RP

24-INCH BUILT-IN FREEZER COLUMN WITH
ICE & WATER DISPENSER

FREEDOM® COLLECTION, PANEL-READY, RIGHT-HAND DOOR SWING


Thermador


Also Available In:

T24ID900LP – Left-Hand Door Swing

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 2 |
| Adjustable Shelves | 2 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 0 |
| External LED Proximity Sensor | Yes |
| Oversized Dispenser Opening | Yes |
| Chilled Water, Crushed and Cubed Ice | Yes |
| Rapid Water Replenishment System | Yes |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 11.2 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 11.2 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 565 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-----------------------|
| Appliance Dimensions (H x W x D) (in.) | 84" * x 23 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 24" x 25" |
| Net / Gross Weight (lbs) | 333 / 355 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 457 kWh |

*Height adjustable + / - 1/2" (+ / - 13 mm)

See page 375 for accessories.

T18IF900SP

18-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 3 |
| Adjustable Shelves | 3 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 4 |
| External LED Proximity Sensor | No |
| Oversized Dispenser Opening | No |
| Chilled Water, Crushed and Cubed Ice | No |
| Rapid Water Replenishment System | No |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|-------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 8.6 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 8.6 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 504W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 17 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 18" x 25" |
| Net / Gross Weight (lbs) | 271 / 291 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 418 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T24IF900SP

24-INCH BUILT-IN FREEZER COLUMN WITH
INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY


Thermador


FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 3 |
| Adjustable Shelves | 3 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 4 |
| External LED Proximity Sensor | No |
| Oversized Dispenser Opening | No |
| Chilled Water, Crushed and Cubed Ice | No |
| Rapid Water Replenishment System | No |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 12.2 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 12.2 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 444 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-----------------------|
| Appliance Dimensions (H x W x D) (in.) | 84" * x 23 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 24" x 25" |
| Net / Gross Weight (lbs) | 319 / 341 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 443 kWh |

*Height adjustable + / - 1/2" (+ / - 13 mm)

See page 375 for accessories.

T30IF900SP

30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 3 |
| Adjustable Shelves | 3 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 4 |
| External LED Proximity Sensor | No |
| Oversized Dispenser Opening | No |
| Chilled Water, Crushed and Cubed Ice | No |
| Rapid Water Replenishment System | No |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 15.8 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 15.8 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 504 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-----------------------|
| Appliance Dimensions (H x W x D) (in.) | 84" * x 29 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 30" x 25" |
| Net / Gross Weight (lbs) | 362 / 387 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 493 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T36IF900SP

36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|------------------------------|---|
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |
| Energy Saving (Economy) Mode | 3°F (-16°C) |

GENERAL PROPERTIES

| | |
|--|---------------------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Lighting | ALL LED Sidewall and Theater Lighting |
| Full Width Shelves | 3 |
| Adjustable Shelves | 3 |
| Freezer Shelves | 4 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| General Use Drawer | 2 |
| Door Bins | 3 |
| External LED Proximity Sensor | No |
| Oversized Dispenser Opening | No |
| Chilled Water, Crushed and Cubed Ice | No |
| Rapid Water Replenishment System | No |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarm | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.4 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 19.4 cu. ft. |

PERFORMANCE

| | |
|--|------------|
| Dedicated Evaporator & Compressor System | Yes |
| SuperFreeze® | Yes |
| Defrost Process | Frost-Free |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 504 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 522 / 551 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | Yes |
| Annual Energy Consumption | 543 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

See page 375 for accessories.

T18IW900SP

18-INCH BUILT-IN WINE PRESERVATION COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Two Independent Temperature Zones for your entire collection
- Smooth Filtered Lighting for clear and easy viewing of all product
- Sleek clean design for the perfect symmetry when paired with additional columns

GENERAL PROPERTIES

| | |
|--|-----------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| Lighting | Theater Lighting |
| Number of Shelves | 11 |
| Shelf Material | Wenge Wood / Aluminum Frame |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Presenter Shelf | Yes |
| Portable Aluminum Wine Presenter | Yes |
| Type of Glass Door | Tempered and UV-protective |
| Number of Temperature Zones | 2 |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--------------------------|----|
| Bottle Capacity (750 ml) | 70 |
|--------------------------|----|

TEMPERATURE RANGES

| | |
|----------------------|---------------------------|
| Zone 1 (Upper Zone) | 41°F (5°C) to 64°F (18°C) |
| Zone 2 (Middle Zone) | 41°F (5°C) to 64°F (18°C) |
| Zone 3 (Lower Zone) | N/A |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 102W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 17 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 18" x 25" |
| Net / Gross Weight (lbs) | 278 / 297 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | No |
| Annual Energy Consumption | 330 kWh |

**Height adjustable + / - 1/2" (+ / - 13 mm)

T24IW900SP

24-INCH BUILT-IN WINE PRESERVATION COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Three Independent Temperature Zones for your complete collection
- Luxuries smooth cantilever shelves for your true wine reserve needs
- Smooth Filtered Lighting for clear and easy viewing of all product
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

GENERAL PROPERTIES

| | |
|--|---|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| Lighting | New Bar ALL LED Sidewall and Theater Lighting |
| Number of Shelves | 11 |
| Shelf Material | Wenge Wood / Aluminum Frame |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Presenter Shelf | Yes |
| Portable Aluminum Wine Presenter | Yes |
| Type of Glass Door | Tempered and UV-protective |
| Number of Temperature Zones | 3 |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--------------------------|----|
| Bottle Capacity (750 ml) | 98 |
|--------------------------|----|

TEMPERATURE RANGES

| | |
|----------------------|---------------------------|
| Zone 1 (Upper Zone) | 41°F (5°C) to 64°F (18°C) |
| Zone 2 (Middle Zone) | 41°F (5°C) to 64°F (18°C) |
| Zone 3 (Lower Zone) | 41°F (5°C) to 64°F (18°C) |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 102 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 23 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 24" x 25" |
| Net / Gross Weight (lbs) | 328 / 350 lbs |

EFFICIENCY

| | |
|---------------------------|---------|
| ENERGY STAR® Qualified | No |
| Annual Energy Consumption | 410 kWh |

*Height adjustable + / -1/2" (+ / -13 mm)

T30IB900SP

30-INCH BUILT-IN 2-DOOR BOTTOM FREEZER

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / **-1/2"** (+ / -13 mm)

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 1 |
| Gallon Door Bins – Refrigerator | 1 |
| Delicate Produce Bins | 2 Large |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 16 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 4.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 11.5 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 29 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 30" x 25" |
| Net / Gross Weight (lbs) | 408 / 432 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 511 kWh |

See page 375 for accessories.

T36IB900SP

36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER

FREEDOM® COLLECTION, PANEL-READY


Thermador


FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / -1/2" (+ / -13 mm)

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 2 |
| Gallon Door Bins – Refrigerator | 1 |
| Delicate Produce Bins | 2 Large |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.4 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 13.9 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4"** x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 540 / 573 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 546 kWh |

See page 375 for accessories.

T36IT900NP

36-INCH BUILT-IN FRENCH DOOR BOTTOM FREEZER

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Panel Ready | Yes |
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 2 |
| Gallon Door Bins – Refrigerator | 2 |
| Delicate Produce Bins | 2 Small |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.4 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 13.9 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 540 / 573 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 585 kWh |

See page 375 for accessories.

T30BB920SS

30-INCH STAINLESS STEEL BUILT-IN 2-DOOR
BOTTOM FREEZER, PRE-ASSEMBLED

FREEDOM® COLLECTION, PROFESSIONAL SERIES HANDLES

Thermador 

Also Available In:

T30BB920SS – Masterpiece® Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | Just above 32°F (0°C) |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / -1/2" (+ / -13 mm)

GENERAL PROPERTIES

| | |
|-----------------------|-----|
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |

Lighting

New Bar ALL LED Sidewall and Theater Lighting

| | |
|-----------------------------------|---|
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |

| | |
|----------------|--------------------------|
| Shelf Material | Glass w/Aluminum Profile |
|----------------|--------------------------|

| | |
|--|-----|
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
|--|-----|

| | |
|---|-----|
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
|---|-----|

| | |
|-------------------------------|---|
| Temperature Controlled Drawer | 1 |
|-------------------------------|---|

| | |
|----------------------------|------------------|
| Humidity Controlled Drawer | ThermaFresh Plus |
|----------------------------|------------------|

| | |
|--------------------|---|
| General Use Drawer | 1 |
|--------------------|---|

| | |
|--------------------------|---|
| Door Bins – Refrigerator | 1 |
|--------------------------|---|

| | |
|---------------------------------|---|
| Gallon Door Bins – Refrigerator | 1 |
|---------------------------------|---|

| | |
|-----------------------|---------|
| Delicate Produce Bins | 2 Large |
|-----------------------|---------|

| | |
|---------------------------|------------|
| Defrost Process – Freezer | Frost-Free |
|---------------------------|------------|

| | |
|-------------------|---|
| Drawers – Freezer | 1 |
|-------------------|---|

| | |
|-----------------------------------|-----|
| Ice Maker with Diamond Ice System | Yes |
|-----------------------------------|-----|

| | |
|------------------|-----|
| Door Open Alarms | Yes |
|------------------|-----|

| | |
|------------------|-----|
| Open Door Assist | Yes |
|------------------|-----|

| | |
|-----------|-----|
| SuperCool | Yes |
|-----------|-----|

| | |
|--------------|-----|
| SuperFreeze® | Yes |
|--------------|-----|

| | |
|---------------|----------------------------|
| Special Modes | Sabbath, Economy, Vacation |
|---------------|----------------------------|

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 16.0 cu. ft. |
|--|--------------|

| | |
|----------------------------------|-------------|
| Freezer Gross Capacity (cu. ft.) | 4.5 cu. ft. |
|----------------------------------|-------------|

| | |
|---------------------------------------|--------------|
| Refrigerator Gross Capacity (cu. ft.) | 11.5 cu. ft. |
|---------------------------------------|--------------|

TECHNICAL DETAILS

| | |
|-----------|-------|
| Watts (W) | 588 W |
|-----------|-------|

| | |
|-------------|------|
| Current (A) | 15 A |
|-------------|------|

| | |
|-----------|--------------|
| Volts (V) | 120V-3 Prong |
|-----------|--------------|

| | |
|----------------|-------|
| Frequency (Hz) | 60 Hz |
|----------------|-------|

| | |
|-------------------------|-----|
| Power Cord Length (in.) | 139 |
|-------------------------|-----|

| | |
|-----------|--------------|
| Plug Type | 120V-3 Prong |
|-----------|--------------|

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 29 3/4" x 24" |
|--|---------------------------|

| | |
|--|-----------------|
| Required Cutout Size (H x W x D) (in.) | 84" x 30" x 25" |
|--|-----------------|

| | |
|--------------------------|---------------|
| Net / Gross Weight (lbs) | 408 / 432 lbs |
|--------------------------|---------------|

EFFICIENCY

| | |
|-----------------------------|-----|
| ENERGY STAR® Most Efficient | Yes |
|-----------------------------|-----|

| | |
|---------------------------|---------|
| Annual Energy Consumption | 511 kWh |
|---------------------------|---------|

See page 375 for accessories.

T30BB910SS

30-INCH STAINLESS STEEL BUILT-IN 2-DOOR BOTTOM FREEZER, PRE-ASSEMBLED

FREEDOM® COLLECTION, MASTERPIECE® SERIES HANDLES

Thermador 



Also Available In:

T30BB920SS – Professional Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / $\frac{1}{2}$ " (+ / -13 mm)

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 1 |
| Gallon Door Bins – Refrigerator | 1 |
| Delicate Produce Bins | 2 Large |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 16.0 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 4.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 11.5 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 29 3/4" x 24" |
| Required Cutout Size (H x W x D) (in.) | 84" x 30" x 25" |
| Net / Gross Weight (lbs) | 408 / 432 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 511 kWh |

See page 375 for accessories.

T36BB920SS

36-INCH STAINLESS STEEL BUILT-IN 2-DOOR BOTTOM FREEZER, PRE-ASSEMBLED

FREEDOM® COLLECTION, PROFESSIONAL SERIES HANDLES

Thermador 



Also Available In:

T36BB910SS – Masterpiece® Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / -1/2" (+ / -13 mm)

GENERAL PROPERTIES

| | |
|-----------------------|-----|
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |

Lighting

New Bar ALL LED Sidewall and Theater Lighting

| | |
|-----------------------------------|---|
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |

| | |
|----------------|--------------------------|
| Shelf Material | Glass w/Aluminum Profile |
|----------------|--------------------------|

| | |
|--|-----|
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
|--|-----|

| | |
|---|-----|
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
|---|-----|

| | |
|-------------------------------|---|
| Temperature Controlled Drawer | 1 |
|-------------------------------|---|

| | |
|----------------------------|------------------|
| Humidity Controlled Drawer | ThermaFresh Plus |
|----------------------------|------------------|

| | |
|--------------------|---|
| General Use Drawer | 1 |
|--------------------|---|

| | |
|--------------------------|---|
| Door Bins – Refrigerator | 2 |
|--------------------------|---|

| | |
|---------------------------------|---|
| Gallon Door Bins – Refrigerator | 1 |
|---------------------------------|---|

| | |
|-----------------------|------------------|
| Delicate Produce Bins | 2 Large, 1 Small |
|-----------------------|------------------|

| | |
|---------------------------|------------|
| Defrost Process – Freezer | Frost-Free |
|---------------------------|------------|

| | |
|-------------------|---|
| Drawers – Freezer | 1 |
|-------------------|---|

| | |
|-----------------------------------|-----|
| Ice Maker with Diamond Ice System | Yes |
|-----------------------------------|-----|

| | |
|------------------|-----|
| Door Open Alarms | Yes |
|------------------|-----|

| | |
|------------------|-----|
| Open Door Assist | Yes |
|------------------|-----|

| | |
|-----------|-----|
| SuperCool | Yes |
|-----------|-----|

| | |
|--------------|-----|
| SuperFreeze® | Yes |
|--------------|-----|

| | |
|---------------|----------------------------|
| Special Modes | Sabbath, Economy, Vacation |
|---------------|----------------------------|

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.5 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 14 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 541 / 573 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 546 kWh |

See page 375 for accessories.

T36BB910SS

36-INCH STAINLESS STEEL BUILT-IN 2-DOOR BOTTOM FREEZER, PRE-ASSEMBLED

FREEDOM® COLLECTION, MASTERPIECE® SERIES HANDLES

Thermador 



Also Available In:

T36BB920SS – Professional Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | Just above 32°F (0°C) |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / **.1/2"** (+ / -13 mm)

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Reversible Door Swing | Yes |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 2 |
| Gallon Door Bins – Refrigerator | 1 |
| Delicate Produce Bins | 2 Large, 1 Small |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.5 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 14 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 541 / 573 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 546 kWh |

See page 375 for accessories.

T36BT920NS**36-INCH STAINLESS STEEL BUILT-IN FRENCH DOOR BOTTOM FREEZER, PRE-ASSEMBLED**

FREEDOM® COLLECTION, PROFESSIONAL SERIES HANDLES

Thermador 

Also Available In:

T36BT910NS – Masterpiece® Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | N/A |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / - 1/2" (+ / -13 mm)

GENERAL PROPERTIES

| | |
|-----------------------|-----|
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |

Lighting

New Bar ALL LED Sidewall and Theater Lighting

| | |
|-----------------------------------|---|
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |

| | |
|----------------|--------------------------|
| Shelf Material | Glass w/Aluminum Profile |
|----------------|--------------------------|

| | |
|--|-----|
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
|--|-----|

| | |
|---|-----|
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
|---|-----|

| | |
|-------------------------------|---|
| Temperature Controlled Drawer | 1 |
|-------------------------------|---|

| | |
|----------------------------|------------------|
| Humidity Controlled Drawer | ThermaFresh Plus |
|----------------------------|------------------|

| | |
|--------------------|---|
| General Use Drawer | 1 |
|--------------------|---|

| | |
|--------------------------|---|
| Door Bins – Refrigerator | 2 |
|--------------------------|---|

| | |
|---------------------------------|---|
| Gallon Door Bins – Refrigerator | 2 |
|---------------------------------|---|

| | |
|-----------------------|---------|
| Delicate Produce Bins | 2 Small |
|-----------------------|---------|

| | |
|---------------------------|------------|
| Defrost Process – Freezer | Frost-Free |
|---------------------------|------------|

| | |
|-------------------|---|
| Drawers – Freezer | 1 |
|-------------------|---|

| | |
|-----------------------------------|-----|
| Ice Maker with Diamond Ice System | Yes |
|-----------------------------------|-----|

| | |
|------------------|-----|
| Door Open Alarms | Yes |
|------------------|-----|

| | |
|------------------|-----|
| Open Door Assist | Yes |
|------------------|-----|

| | |
|-----------|-----|
| SuperCool | Yes |
|-----------|-----|

| | |
|--------------|-----|
| SuperFreeze® | Yes |
|--------------|-----|

| | |
|---------------|----------------------------|
| Special Modes | Sabbath, Economy, Vacation |
|---------------|----------------------------|

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.4 cu. ft. |
|--|--------------|

| | |
|----------------------------------|-------------|
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
|----------------------------------|-------------|

| | |
|---------------------------------------|--------------|
| Refrigerator Gross Capacity (cu. ft.) | 13.9 cu. ft. |
|---------------------------------------|--------------|

TECHNICAL DETAILS

| | |
|-----------|-------|
| Watts (W) | 588 W |
|-----------|-------|

| | |
|-------------|------|
| Current (A) | 15 A |
|-------------|------|

| | |
|-----------|--------------|
| Volts (V) | 120V-3 Prong |
|-----------|--------------|

| | |
|----------------|-------|
| Frequency (Hz) | 60 Hz |
|----------------|-------|

| | |
|-------------------------|-----|
| Power Cord Length (in.) | 139 |
|-------------------------|-----|

| | |
|-----------|--------------|
| Plug Type | 120V-3 Prong |
|-----------|--------------|

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
|--|-------------------------------|

| | |
|--|-----------------|
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
|--|-----------------|

| | |
|--------------------------|---------------|
| Net / Gross Weight (lbs) | 541 / 573 lbs |
|--------------------------|---------------|

EFFICIENCY

| | |
|-----------------------------|-----|
| ENERGY STAR® Most Efficient | Yes |
|-----------------------------|-----|

| | |
|---------------------------|---------|
| Annual Energy Consumption | 585 kWh |
|---------------------------|---------|

See page 375 for accessories.

T36BT910NS

36-INCH STAINLESS STEEL BUILT-IN FRENCH DOOR BOTTOM FREEZER, PRE-ASSEMBLED

FREEDOM® COLLECTION, MASTERPIECE® SERIES HANDLES

Thermador 



Also Available In:

T36BT920NS – Professional Series Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

| | |
|-------------------------------|--|
| Refrigerator | 35°F (2°C) to 46°F (8°C) |
| Adjustable Temperature Drawer | 32°F (0°C) to 37°F (3°C) |
| Deli Drawer | Just above 32°F (0°C) |
| SuperCool | 35.5°F (2°C) for approximately 9 hours |
| Energy Saving (Economy) Mode | Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C) |
| Freezer | -9°F (-23°C) to 7°F (14°C) |
| SuperFreeze® | -9°F (-23°C) for approximately 52 hours |

*Height adjustable + / **.1/2"** (+ / - 13 mm)

GENERAL PROPERTIES

| | |
|--|----------------------------|
| Reversible Door Swing | No |
| SoftClose® Drawers | Yes |
| Carbon Air Filter | Yes |
| Lighting | |
| New Bar ALL LED Sidewall and Theater Lighting | |
| Full Width Shelves – Refrigerator | 2 |
| Adjustable Shelves – Refrigerator | 2 |
| Shelf Material | Glass w/Aluminum Profile |
| Full Extension Drawers @ 115° Door Opening Angle | Yes |
| Full Extension Drawers @ 90° Door Opening Angle | Yes |
| Temperature Controlled Drawer | 1 |
| Humidity Controlled Drawer | ThermaFresh Plus |
| General Use Drawer | 1 |
| Door Bins – Refrigerator | 2 |
| Gallon Door Bins – Refrigerator | 2 |
| Delicate Produce Bins | 2 Small |
| Defrost Process – Freezer | Frost-Free |
| Drawers – Freezer | 1 |
| Ice Maker with Diamond Ice System | Yes |
| Door Open Alarms | Yes |
| Open Door Assist | Yes |
| SuperCool | Yes |
| SuperFreeze® | Yes |
| Special Modes | Sabbath, Economy, Vacation |

CAPACITY

| | |
|--|--------------|
| Total Unit Gross Capacity (cu. ft.) – AHAM | 19.4 cu. ft. |
| Freezer Gross Capacity (cu. ft.) | 5.5 cu. ft. |
| Refrigerator Gross Capacity (cu. ft.) | 13.9 cu. ft. |

TECHNICAL DETAILS

| | |
|-------------------------|--------------|
| Watts (W) | 588 W |
| Current (A) | 15 A |
| Volts (V) | 120V-3 Prong |
| Frequency (Hz) | 60 Hz |
| Power Cord Length (in.) | 139 |
| Plug Type | 120V-3 Prong |

DIMENSIONS & WEIGHT

| | |
|--|-------------------------------|
| Appliance Dimensions (H x W x D) (in.) | 83 3/4" * x 35 3/4" x 24 3/4" |
| Required Cutout Size (H x W x D) (in.) | 84" x 36" x 25" |
| Net / Gross Weight (lbs) | 541 / 573 lbs |

EFFICIENCY

| | |
|-----------------------------|---------|
| ENERGY STAR® Most Efficient | Yes |
| Annual Energy Consumption | 585 kWh |


See page 375 for accessories.



FREEDOM® COLLECTION

APPLIANCE OVERVIEW


FRESH FOOD COLUMNS

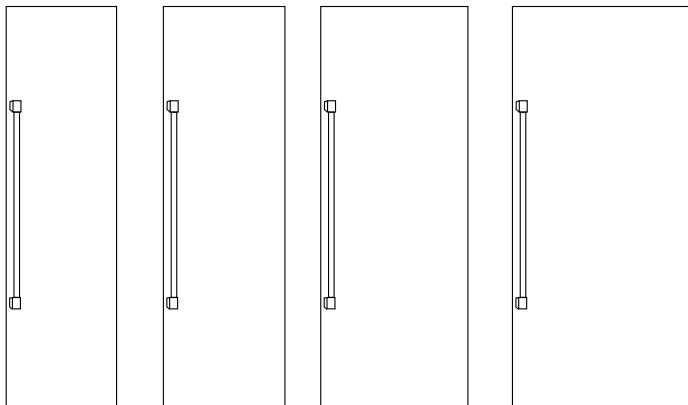

T23IR900SP T24IR900SP T30IR900SP T36IR900SP

| | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|
| 23.5-Inch | 24-Inch | 30-Inch | 36-Inch |
| Reversible Door Swing | Reversible Door Swing | Reversible Door Swing | Reversible Door Swing |
| Build Your Custom Column |

WINE PRESERVATION COLUMNS

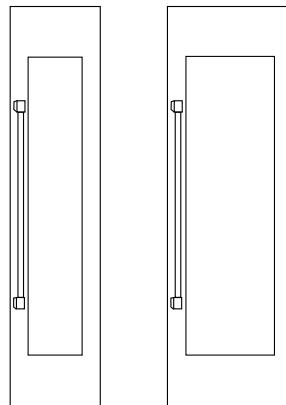


T18IW900SP T24IW900SP

| | |
|--------------------------|--------------------------|
| 18-Inch | 24-Inch |
| Reversible Door Swing | Reversible Door Swing |
| Build Your Custom Column | Build Your Custom Column |

★ PLANNING TIP

A Frame Kit enables installation of all Freedom Columns in 24-inch deep cutouts. See page 375 for details.


FREEZER COLUMNS WITH EXTERNAL DISPENSER

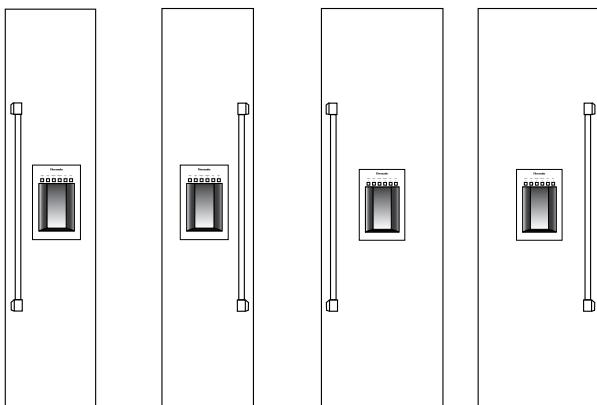

T18ID900RP T18ID900LP T24ID900RP T24ID900LP

| | | | |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| 18-Inch | 18-Inch | 24-Inch | 24-Inch |
| External Ice & Water Dispenser |
| Right-Hand Door Swing | Left-Hand Door Swing | Right-Hand Door Swing | Left-Hand Door Swing |
| Build Your Custom Column |

FREEZER COLUMNS WITH INTERNAL ICE MAKER

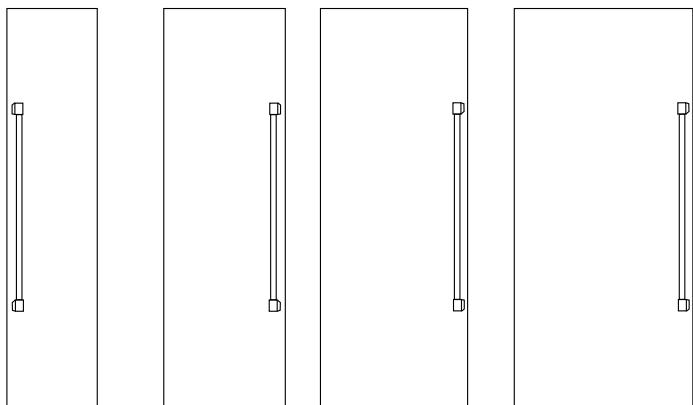


T18IF900SP T24IF900SP T30IF900SP T36IF900SP

| | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|
| 18-Inch | 24-Inch | 30-Inch | 36-Inch |
| Internal Ice Maker | Internal Ice Maker | Internal Ice Maker | Internal Ice Maker |
| Reversible Door Swing | Reversible Door Swing | Reversible Door Swing | Reversible Door Swing |
| Build Your Custom Column |

FREEDOM® COLLECTION

APPLIANCE OVERVIEW

BOTTOM FREEZERS

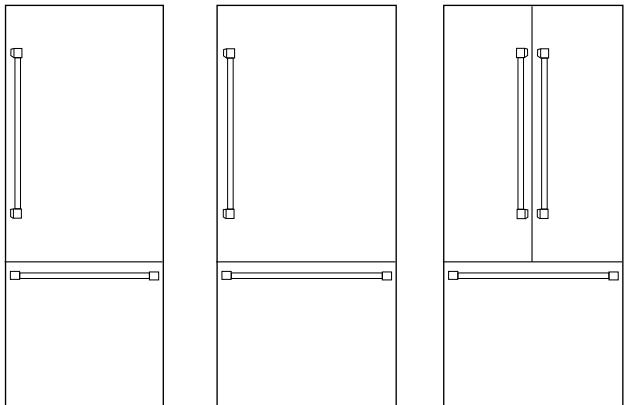


T30IB900SP

T36IB900SP

T36IT900NP

30-Inch
2-Door36-Inch
2-Door36-Inch
French DoorReversible
Door SwingReversible
Door SwingReversible
Door SwingBuild Your
Custom ColumnBuild Your
Custom ColumnBuild Your
Custom Column

PRE-ASSEMBLED BOTTOM FREEZERS*

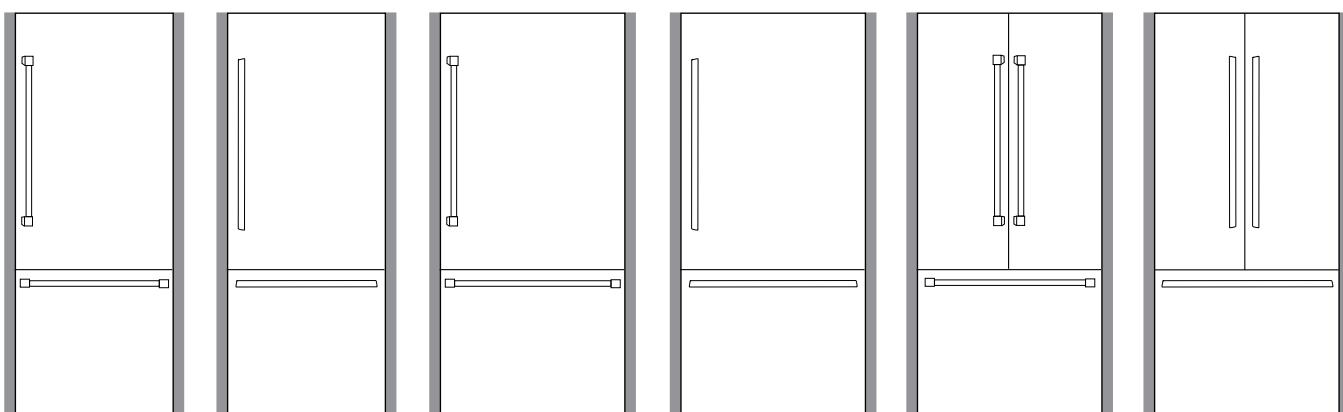

T30BB920SS

T30BB910SS

T36BB920SS

T36BB910SS

T36BT920NS

T36BT910NS

30-Inch
2-Door30-Inch
2-Door36-Inch
2-Door36-Inch
2-Door36-Inch
French Door36-Inch
French DoorReversible
Door SwingReversible
Door SwingReversible
Door SwingReversible
Door Swing

—









—

Flat Stainless
Steel PanelsFlat Stainless
Steel PanelsProfessional
HandlesMasterpiece®
HandlesProfessional
HandlesMasterpiece®
HandlesProfessional
HandlesMasterpiece®
Handles

*Pre-assembled bottom freezers can be installed flush in 25-inch deep cutouts or with included frame in 24-inch deep cutouts.

FREEDOM® COLLECTION

BUILDING YOUR CUSTOM COLUMN

| CHOOSE UNIT | | CHOOSE PANEL (All units are panel ready for custom panel installation) | | CHOOSE HANDLE AND OPTIONAL FRAME |
|--|--|---|---|---|
| FRESH FOOD COLUMN – FULLY FLUSH COLLECTION | | | | |
| 23.5-Inch |  <p>T23IR900SP Reversible Door Swing Custom Column</p> |  <p>TFL23IR900 Flat Stainless Steel Door Panel</p> |  <p>Professional Series PR36HNDL20 – 36-Inch Professional PR30HNDL20 – 30-Inch Professional</p> | |
| 24-Inch |  <p>T24IR900SP Reversible Door Swing Custom Column</p> |  <p>TFL24IR800 Flat Stainless Steel Door Panel</p> |  <p>Masterpiece® Series MS36HNDL20 – 36-Inch Masterpiece MS30HNDL20 – 30-Inch Masterpiece</p> | |
| 30-Inch |  <p>T30IR900SP Reversible Door Swing Custom Column</p> |  <p>TFL30IR800 Flat Stainless Steel Door Panel</p> |  <p>Professional Series – Classic PR36HNDL10 – 36-Inch Professional Classic PR30HNDL10 – 30-Inch Professional Classic</p> | |
| 36-Inch |  <p>T36IR900SP Reversible Door Swing Custom Column</p> |  <p>TFL36IR900 Flat Stainless Steel Door Panel</p> |  <p>Masterpiece® Series – Classic MS36HNDL10 – 36-Inch Masterpiece Classic MS30HNDL10 – 30-Inch Masterpiece Classic</p> | |
| FREEZER COLUMN WITH EXTERNAL DISPENSER – FULLY FLUSH COLLECTION | | | | |
| 18-Inch |  <p>T18ID900RP Right-Hand Door Swing External Ice & Water Dispenser Custom Column</p> |  <p>TFL18ID800 Flat Stainless Steel Door Panel</p> |  | |
| |  <p>T18ID900LP Left-Hand Door Swing External Ice & Water Dispenser Custom Column</p> |  <p>TFL18ID800 Flat Stainless Steel Door Panel</p> |  | |
| 24-Inch |  <p>T24ID900RP Right-Hand Door Swing External Ice & Water Dispenser Custom Column</p> |  <p>TFL24ID800 Flat Stainless Steel Door Panel</p> |  | |
| |  <p>T24ID900LP Left-Hand Door Swing External Ice & Water Dispenser Custom Column</p> |  <p>TFL24ID800 Flat Stainless Steel Door Panel</p> |  | <p>Freedom® Frame Kit FRAMEKIT10</p> <p>Included with all pre-assembled bottom freezers, this adjustable frame is also available as an optional accessory for use with any custom column for installation in 24-inch (610 mm) deep cutouts. The kit includes two identical and reversible metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.</p> |

IMPORTANT: When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, Heater Kit HEATRKIT10 (27W @ 120V) or HEATRKIT20 (13W @ 120V) must be purchased. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. See page 375 for details.

FREEDOM® COLLECTION




BUILDING YOUR CUSTOM COLUMN

CHOOSE HANDLE AND OPTIONAL FRAME

NOTE: Choose one handle for each column, 2 handles for each 2-door bottom freezer and 3 handles for each French Door bottom freezer.

CHOOSE UNIT







FREEZER COLUMN WITH INTERNAL ICE MAKER – FULLY FLUSH COLLECTION

| | | | | | | |
|---|---|--|---|---|---|---|
| 18-Inch |  | T18IF900SP Right-Hand Door Swing External Ice & Water Dispenser Custom Column |  | TFL18IR800 Flat Stainless Steel Door Panel |  | Professional Series PR36Hndl20 – 36-Inch Professional PR30Hndl20 – 30-Inch Professional |
| |  | T24IF900SP Right-Hand Door Swing External Ice & Water Dispenser Custom Column |  | TFL24IR800 Flat Stainless Steel Door Panel |  | Masterpiece® Series MS36Hndl20 – 36-Inch Masterpiece MS30Hndl20 – 30-Inch Masterpiece |
| |  | T30IF900SP Right-Hand Door Swing External Ice & Water Dispenser Custom Column |  | TFL30IR800 Flat Stainless Steel Door Panel |  | Professional Series – Classic PR36Hndl10 – 36-Inch Professional Classic PR30Hndl10 – 30-Inch Professional Classic |
| |  | T36IF900SP Right-Hand Door Swing External Ice & Water Dispenser Custom Column |  | TFL36IR900 Flat Stainless Steel Door Panel |  | Masterpiece® Series – Classic MS36Hndl10 – 36-Inch Masterpiece Classic MS30Hndl10 – 30-Inch Masterpiece Classic |
| WINE PRESERVATION – FULLY FLUSH COLLECTION | | | | |  | Freedom® Frame Kit FRAMEKIT10 Included with all pre-assembled bottom freezers, this adjustable frame is also available as an optional accessory for use with any custom column for installation in 24-inch (610 mm) deep cutouts. The kit includes two identical and reversible metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns. |
| 18-Inch |  | T18IW900SP Reversible Door Swing Custom Column |  | TFL18IW800 Flat Stainless Steel Door Panel | | |
| 24-Inch |  | T24IW900SP Reversible Door Swing Custom Column |  | TFL24IW800 Flat Stainless Steel Door Panel | | |

IMPORTANT: When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, Heater Kit HEATRKIT10 (27W @ 120V) or HEATRKIT20 (13W @ 120V) must be purchased. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. See page 375 for details.

FREEDOM® COLLECTION






BUILDING YOUR CUSTOM COLUMN

| CHOOSE UNIT | | CHOOSE PANEL | CHOOSE HANDLE AND OPTIONAL FRAME |
|--|---|--|--|
| BOTTOM FREEZER – FULLY FLUSH COLLECTION | | | |
| 30-Inch |  | <p>T30IB900SP 2-Door Reversible Door Swing Custom Column</p> | <p>CHOOSE PANEL (All units are panel ready for custom panel installation)</p> <p></p> <p>TFL30IB800 Flat Stainless Steel Door Panel</p> <p></p> <p>Professional Series PR36HNDL20 – 36-Inch Professional PR30HNDL20 – 30-Inch Professional</p> <p></p> <p>Masterpiece® Series MS36HNDL20 – 36-Inch Masterpiece MS30HNDL20 – 30-Inch Masterpiece</p> |
| 36-Inch |  | <p>T36IB900SP 2-Door Reversible Door Swing Custom Column</p> | <p></p> <p>TFL36IB800 Flat Stainless Steel Door Panel</p> <p></p> <p>Professional Series – Classic PR36HNDL10 – 36-Inch Professional Classic PR30HNDL10 – 30-Inch Professional Classic</p> <p></p> <p>Masterpiece® Series – Classic MS36HNDL10 – 36-Inch Masterpiece Classic MS30HNDL10 – 30-Inch Masterpiece Classic</p> |
| 36-Inch |  | <p>T36IT900NP French Door Custom Column</p> | <p></p> <p>TFL36IT800 Flat Stainless Steel Door Panel</p> <p></p> <p>Included with all pre-assembled bottom freezers, this adjustable frame is also available as an optional accessory for use with any custom column for installation in 24-inch (610 mm) deep cutouts. The kit includes two identical and reversible metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.</p> <p>Freedom® Frame Kit FRAMEKIT10</p> |

IMPORTANT: When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, Heater Kit HEATRKIT10 (27W @ 120V) or HEATRKIT20 (13W @ 120V) must be purchased. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. See page 375 for details.

CHOOSE UNIT**PRE-ASSEMBLED BOTTOM FREEZER – FULLY FLUSH COLLECTION**

A frame is attached to all pre-assembled models. It is removable if a flush installation in a 25" deep cabinet is desired.

| | | | |
|----------------|---|---|---|
| 30-Inch |  | T30BB920SS 2-Door Professional Handles | Reversible Door Swing Flat Stainless Steel Panels Removable Frame |
| 30-Inch |  | T30BB910SS 2-Door Masterpiece® Handles | Reversible Door Swing Flat Stainless Steel Panels Removable Frame |
| 36-Inch |  | T36BB920SS 2-Door Professional Handles | Reversible Door Swing Flat Stainless Steel Panels Removable Frame |
| 36-Inch |  | T36BB910SS 2-Door Masterpiece® Handles | Reversible Door Swing Flat Stainless Steel Panels Removable Frame |
| 36-Inch |  | T36BT920NS French Door Professional Handles | Flat Stainless Steel Panels Removable Frame |
| 36-Inch |  | T36BT910NS French Door Masterpiece® Handles | Flat Stainless Steel Panels Removable Frame |

IMPORTANT: When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, Heater Kit HEATRKIT10 (27W @ 120V) or HEATRKIT20 (13W @ 120V) must be purchased. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. See page 375 for details.

CUSTOMIZE THE INTERIOR**OPTIONAL STORAGE ACCESSORIES**

See pages 328-329 for inspiration on how to combine interior storage accessories to suit your culinary lifestyle.

| | | |
|---|---|---|
| Fresh Food Columns, Bottom Freezers and Pre-assembled Bottom Freezers |  |  |
| SPRODBIN10 Small Delicate Produce Bin | LPRODBIN10 Large Delicate Produce Bin | |
|  |  | |
| 24PRODRAIL 24-Inch Produce Bin Railing | 30PRODRAIL 30-Inch Produce Bin Railing | |
|  |  | |
| 36PRODRAIL 36-Inch French Door Produce Bin Railing | 3DPRODRAIL French Door Produce Bin Railing | |
|  |  | |
| 24HFGALBIN 24-Inch Half Gallon Bin | 30HFGALBIN 30-Inch Half Gallon Bin | |
|  |  | |
| 36HFGALBIN 36-Inch French Door Half Gallon Bin | 3DHFGALBIN French Door Half Gallon Bin | |
|  | | |
| 3DHFGALBIN French Door Half Gallon Bin | | |
|  | | |
| ICEBUCKETL Large Ice Bucket | | |

FREEDOM® COLLECTION

PLANNING CHECKLIST



This custom product requires attention to the finest details. Did you remember to...?


- Choose a desired configuration – side-by-side or stand-alone columns (See pages 378–381 for details)
- Plan the cutout height(s) – 84" (See pages 378–381 for details)
- Plan the cutout width(s) – depends on configuration and column width (See pages 378–381 for details)
- Plan the cutout depth – 25" for North American style cabinets, 24" with installation frame accessory, 24" for European style cabinets (See pages 378–381 for details)
- Ensure the cutout interior (top and sides) is flush to the appliance at a depth of min. 4", preferably 6" from face frame (See pages 378–381 for details)
- Ensure the cutout interior returns (top and sides) are finished to match exterior at a depth of min. 4", preferably 6" from face frame (See pages 378–381 for details)
- Ensure proper clearance for appliance doors including handle(s) – check for interference with other appliances, open or closed cabinets and doors, nearby walls (See page 373 for details)
- Properly site the electrical outlet and (if applicable) water box (See pages 376–377 for details)
- Ensure the reverse of any custom panel is finished to match the exterior
- Choose the handle style – Professional Series, Professional Series Classic, Masterpiece® Series, Masterpiece® Series Classic or custom
- Choose the correct handle length. Typically, all columns would use a 36" handle. The 30" handle must be used on the 30" bottom freezer drawer.
- Choose the toekick style – stainless (included with appliance) or design custom toekick(s) (See page 382 for details)
- Procure the proper installation accessories – stainless steel frame kit (FRAMEKIT10) for framed installations in 24-inch deep cutouts, heater kit (HEATRKIT10 or HEATRKIT20) for installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. (See page 375 for details)
- If applicable, procure the proper water filter accessories – additional replacement filters (REPLFLTR10), filter by-pass (SCRNFLTR10) for in-home water filtration system (See page 375 for details)

FREEDOM® COLLECTION


COMMON CONFIGURATIONS

The Thermador® Freedom® Collection uses independent columns that create unlimited flexibility in both function and design. Some suggested pairings are listed below. A special kit is included with all freezer columns to simplify traditional side-by-side refrigerator / freezer combinations. When combining two appliances where one is not a freezer column or if any two units are installed less than 6" (152 mm) apart from one another but not connected side-by-side, always use the Heater Kit (HEATRKIT10 or HEATRKIT20) to guard against damaging condensation build-up.

42-INCH




18-Inch
Freezer Column
T18IF900SP
24-Inch Fresh
Food Column
T24IR900SP



18-Inch
Freezer Column
T18ID900LP
24-Inch Fresh
Food Column
T24IR900SP



18-Inch
Freezer Column
T18IF900SP
24-Inch Fresh
Food Column
T24IR900SP




18-Inch
Freezer Column
T18ID900LP
24-Inch Fresh
Food Column
T24IR900SP


Shown with
FRAMEKIT10

Shown with
FRAMEKIT10


48-INCH




18-Inch
Freezer Column
T18IF900SP
30-Inch Fresh
Food Column
T30IR900SP




18-Inch
Freezer Column
T18ID900LP
30-Inch Fresh
Food Column
T30IR900SP




24-Inch
Freezer Column
T24IF900SP
24-Inch Fresh
Food Column
T24IR900SP




24-Inch
Freezer Column
T24ID900LP
24-Inch Fresh
Food Column
T24IR900SP



24-Inch
Freezer Column
T24IF900SP
24-Inch Fresh
Food Column
T24IR900SP




24-Inch
Freezer Column
T24IF900SP
24-Inch Fresh
Food Column
T24IR900SP



30-Inch* 2-Door
Bottom Freezer
T30IB900SP
18-Inch* Wine
Preservation
Column
T18IW900SP

54-INCH




24-Inch
Freezer Column
T24IF900SP
30-Inch Fresh
Food Column
T30IR900SP



24-Inch
Freezer Column
T24ID900LP
30-Inch Fresh
Food Column
T30IR900SP




36-Inch* 2-Door
Bottom Freezer
T36IB900SP
18-Inch* Wine
Preservation
Column
T18IW900SP



30-Inch* 2-Door
Bottom Freezer
T30IB900SP
24-Inch* Wine
Preservation
Column
T24IW900SP

60-INCH



30-Inch
Freezer Column
T30IF900SP
30-Inch Fresh
Food Column
T30IR900SP



36-Inch* 2-Door
Bottom Freezer
T36IB900SP
24-Inch* Wine
Preservation
Column
T24IW900SP



30-Inch* 2-Door
Bottom Freezer
T30IB900SP
30-Inch* 2-Door
Bottom Freezer
T30IB900SP

*Requires Heater Kit HEATRKIT10

FREEDOM® COLLECTION

PLANNING INFORMATION

INSTALLATION CONSIDERATIONS

LOCATION

The appliance should be installed in a dry, ventilated room. It may not be installed outdoors. The ambient temperature of the room must be between 55°F (13°C) and 100°F (43°C).

The appliance should not be exposed to constant direct sunlight or excessive heat. If installation next to a heat source, such as an oven, radiator, etc. is unavoidable, use a suitable insulating plate or observe the following minimum distances from the heat source:

- 1 1/4" (30 mm) from an electric cooking appliance,
- 11 13/16" (300 mm) from an oil or solid-fuel cooking appliance.

INSTALLATION AND CUTOUT DIMENSIONS

Please see pages 378–381 for complete cutout planning information.

It is important to observe the specified dimensions of the installation cutout for a trouble-free installation of the appliance and for the subsequent appearance of the door panel.

- In particular ensure that the cutout is square. Squareness can be checked by suitable means, e.g. spirit level, diagonal measurements, etc.
- The side walls of the cutout must be flush. The minimum thickness of the side and top walls is 5/8" (16 mm). The minimum thickness of toekick panel is 1/4" (6 mm).

FURNITURE / FIXTURES

During installation, the appliance is fastened to adjacent and overhead furniture / fixtures and it is therefore essential that all such furniture / fixtures are well secured to the substructure or adjacent wall.

FLOORING / SUBSTRUCTURE

On account of the heavy weight of a fully loaded appliance, a load-bearing substructure is required. To ensure correct installation and function, the support must be flat, level and made of hard, rigid material. If in doubt, contact an architect or a building expert. Refer to the following table for load-bearing capacity:

| APPLIANCE | LOAD BEARING CAPACITY |
|-------------------------------------|-----------------------|
| 23.5-Inch Fresh Food Column | 945 lbs. / 429 kg |
| 24-Inch Fresh Food Column | 949 lbs. / 431 kg |
| 30-Inch Fresh Food Column | 1,097 lbs. / 498 kg |
| 36-Inch Fresh Food Column | 1,363 lbs. / 618 kg |
| 18-Inch Freezer Column | 774 lbs. / 351 kg* |
| 24-Inch Freezer Column | 958 lbs. / 435 kg* |
| 30-Inch Freezer Column | 1,116 lbs. / 507 kg |
| 36-Inch Freezer Column | 1,351 lbs. / 614 kg |
| 18-Inch Wine Preservation Column | 840 lbs. / 381 kg |
| 24-Inch Wine Preservation Column | 1,067 lbs. / 484 kg |
| 30-Inch Bottom Freezer, 2-Door | 1,135 lbs. / 515 kg** |
| 36-Inch Bottom Freezer, 2-Door | 1,399 lbs. / 635 kg** |
| 36-Inch Bottom Freezer, French Door | 1,382 lbs. / 627 kg** |

*Without water dispenser **Pre-assembled units

FREEDOM® COLLECTION

INSTALLATION OPTIONS

The Freedom® Collection offers a variety of installation possibilities*. In some instances, special accessories are required.

| RECOMMENDED INSTALLATIONS | | CONSIDERATIONS |
|--------------------------------------|--|---|
| STAND-ALONE | | Any Freedom appliance can be installed as a stand-alone unit. Ensure a cutout flush to the appliance at a depth of minimum 4" (102 mm), preferably 6" (152 mm) on the top and sides. |
| SIDE-BY-SIDE | | When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is provided. For all other (non-traditional) side-by-side combinations or instances where any appliances are installed less than 6" (152 mm) apart from one another but not connected side-by-side, purchase the Heater Kit (HEATRKIT10 or HEATRKIT20). |
| SPLIT COLUMNS WITH PARTITION | | When dimensioning the partition, note the thickness of the door panel (including handles) as well as the swivel range to prevent damage if the doors are opened at the same time. (See pages 382-383 for details on door swivel range dimensions) Three appliances can be installed together only if a partition—minimum 5/8" (16 mm)—is placed between two of the appliances. Ensure that door panel thickness (including handles) as well as the swivel range are accounted for. |
| AT THE END OF A CABINETRY RUN | | All Freedom appliances must be completely enclosed on the top and sides. If one side of the appliance is visible, a decorative side panel must be used. The side panel must be connected firmly to the wall, the floor and any overhead furniture / fixtures before the appliance is placed in the cutout. |
| NOT RECOMMENDED | | CONCERN |
| | | It is absolutely essential to ensure that the appliance is installed in such a way that the doors do not interfere with an adjacent wall or other kitchen elements. (See pages 382-383 for details on door swivel range dimensions) |
| | | A partition—minimum 5/8" (16 mm)—is required to ensure the doors do not interfere with one another when opened. Use a partition to separate appliances and observe the door swivel range. (See pages 382-383 for details on door swivel range dimensions) |
| | | A Thermador French Door Bottom Freezer cannot be connected side-by-side with any other appliance. Use a partition to separate appliances and observe the door swivel range. (See pages 382-383 for details on door swivel range dimensions) |

*The Thermador warranty shall apply only to recommended installations.


FREEDOM® COLLECTION

DOOR PANEL DIMENSIONS

Each Freedom® Collection refrigeration appliance is designed to be equipped with a decorative door panel. A panel can be custom-made or purchased as a stainless steel accessory. The table below illustrates the dimensions of the stainless steel panel accessories and can be used as a guide in creating custom panels. At 79 7/8" (2029 mm) tall, they are designed for a toekick height of 4" (102 mm), and a total cutout height of 84" (2134 mm) yielding 1/8" (3 mm) reveals. At 3/4" (19 mm) deep, they are designed to attach to the 24" (610 mm) deep appliance for an overall depth of 24 3/4" (629 mm). See page 379 for cutout planning.

When using custom panels, always ensure that the panel reverse is finished to match the exterior, as parts of the panel reverse will be visible when the refrigerator door is opened.

IMPORTANT: While these sketches can serve as a general guide in planning panel dimensions, the correct panel dimensions are dictated by design choices including style and dimensions of surrounding kitchen cabinetry, case and toekick height, etc. Please ensure careful planning based on the specific kitchen design.

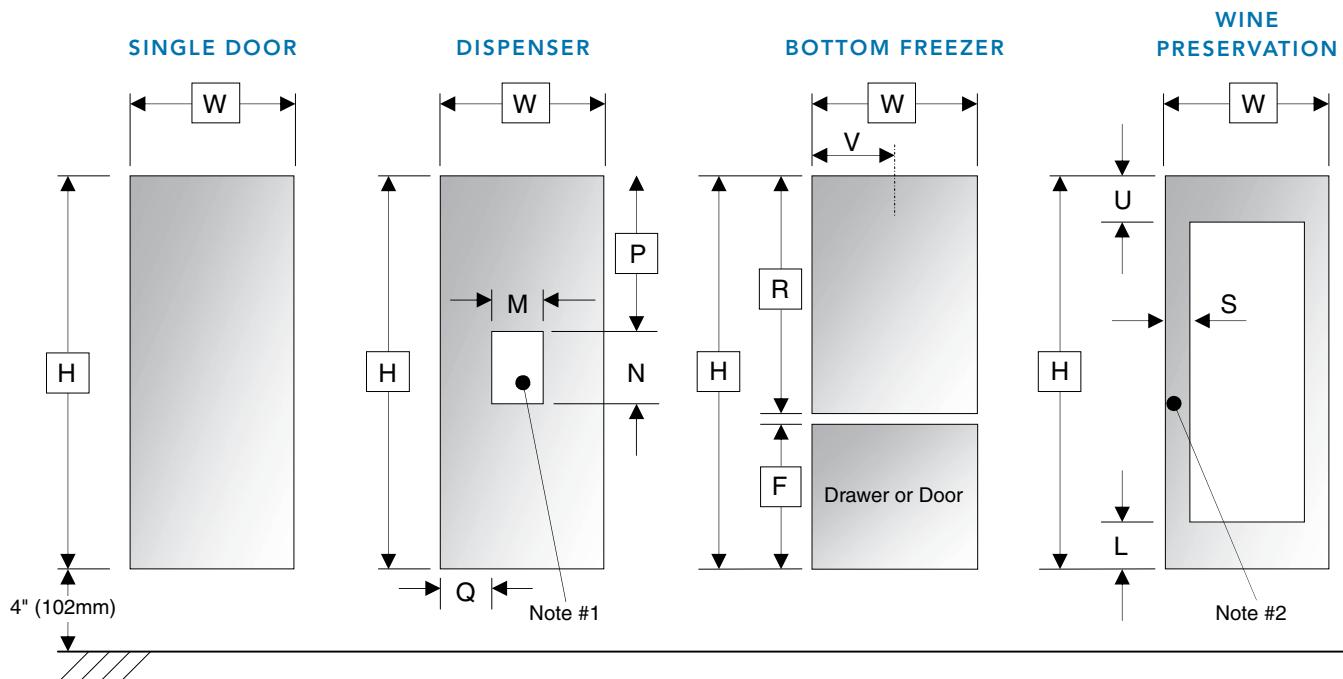

| MODEL | DESCRIPTION | H | W | V | R | F | M | N | P | Q | U | L | S | MAX. PANEL WEIGHT |
|-------------------------|---------------------------------------|-------------------|--------------------|------------------|---------------------|--------------------|--------------------|--------------------|----------------------|-------------------|------------------|----------------|---|-------------------|
| T18IF900SP | 18-Inch Freezer Column | 79 7/8" (2029 mm) | 17 3/4" (451 mm) | — | — | — | — | — | — | — | — | — | — | 37 lbs. (17kg) |
| T23IR900SP | 23.5-Inch Fresh Food Column | 79 7/8" (2029 mm) | 23 17/64" (591 mm) | — | — | — | — | — | — | — | — | — | — | 50 lbs. (23kg) |
| T24IR900SP / T24IF900SP | 24-Inch Freezer / Fresh Food Columns | 79 7/8" (2029 mm) | 23 3/4" (603 mm) | — | — | — | — | — | — | — | — | — | — | 50 lbs. (23kg) |
| T30IR900SP / T30IF900SP | 30-Inch Freezer / Fresh Food Columns | 79 7/8" (2029 mm) | 29 3/4" (756 mm) | — | — | — | — | — | — | — | — | — | — | 64 lbs. (29kg) |
| T36IR900SP / T36IF900SP | 36-Inch Freezer / Fresh Food Columns | 79 7/8" (2029 mm) | 35 3/4" (908 mm) | — | — | — | — | — | — | — | — | — | — | 66 lbs. (30kg) |
| T18ID900RP / T18ID900LP | 18-Inch Ice & Water Dispenser Columns | 79 7/8" (2029 mm) | 17 3/4" (451 mm) | — | — | — | 9 1/16" (230.5 mm) | 14 1/2" (368.3 mm) | 32 11/16" (830.5 mm) | 4 11/32" (110 mm) | — | — | — | 37 lbs. (17kg) |
| T24ID900RP / T24ID900LP | 24-Inch Ice & Water Dispenser Columns | 79 7/8" (2029 mm) | 23 3/4" (603 mm) | — | — | — | 9 1/16" (230.5 mm) | 14 1/2" (368.3 mm) | 32 11/16" (830.5 mm) | 7 11/32" (186 mm) | — | — | — | 50 lbs. (23kg) |
| T30IB900SP | 30-Inch Two-Door Bottom Freezer | 79 7/8" (2029 mm) | 29 3/4" (756 mm) | — | 51 11/32" (1304 mm) | 28 13/32" (722 mm) | — | — | — | — | — | — | — | 55 lbs. (25kg) |
| T36IB900SP | 36-Inch Two-Door Bottom Freezer | 79 7/8" (2029 mm) | 35 3/4" (908 mm) | — | 51 11/32" (1304 mm) | 28 13/32" (722 mm) | — | — | — | — | — | — | — | 55 lbs. (25kg) |
| T36IT900NP | 36-Inch French Door Bottom Freezer | 79 7/8" (2029 mm) | 35 3/4" (908 mm) | 17 3/4" (451 mm) | 51 11/32" (1304 mm) | 28 13/32" (722 mm) | — | — | — | — | — | — | — | 55 lbs. (25kg) |
| T18IW900SP | 18-Inch Wine Preservation Column | 79 7/8" (2029 mm) | 17 3/4" (451 mm) | — | — | — | — | — | — | 10 1/8" (257 mm) | 10 1/8" (257 mm) | 3 3/4" (95 mm) | — | 37 lbs. (17kg) |
| T24IW900SP | 24-Inch Wine Preservation Column | 79 7/8" (2029 mm) | 23 3/4" (603 mm) | — | — | — | — | — | — | 10 1/8" (257 mm) | 10 1/8" (257 mm) | 3 3/4" (95 mm) | — | 50 lbs. (23kg) |

NOTE #1: The cutout for the dispenser unit must be horizontally and vertically centered in the panel.

NOTE #2: For custom wine preservation column door panels, the width of the two lateral flanges of the frame may vary between 2 1/2" (64 mm) and 3 3/4" (95 mm).

FREEDOM® COLLECTION

OPTIONAL ACCESSORIES

FLAT STAINLESS STEEL DOOR PANELS



FRESH FOOD

- TFL23IR900 – 23.5-Inch
- TFL24IR800 – 24-Inch
- TFL30IR800 – 30-Inch
- TFL36IR900 – 36-Inch

FREEZER

- TFL18ID800 – 18-Inch with Dispenser
- TFL18IR800 – 18-Inch without Dispenser
- TFL24ID800 – 24-Inch with Dispenser
- TFL24IR800 – 24-Inch without Dispenser
- TFL30IR800 – 30-Inch without Dispenser
- TFL36IR900 – 36-Inch without Dispenser

BOTTOM FREEZER

- TFL30IB800 – 30-Inch 2-Door
- TFL36IB800 – 36-Inch 2-Door
- TFL36IT800 – 36-Inch French Door

WINE PRESERVATION

- TFL18IW800 – 18-Inch
- TFL24IW800 – 24-Inch

REFRIGERATION STORAGE



DELICATE PRODUCE BIN

- SPRODBIN10 – Small
- LPRODBIN10 – Large



PRODUCE BIN RAILING

- 24PRODRAIL – 24-Inch
- 30PRODRAIL – 30-Inch
- 36PRODRAIL – 36-Inch
- 3DPRODRAIL – French Door



HALF GALLON BIN

- 24HFGALBIN – 24-Inch
- 30HFGALBIN – 30-Inch
- 36HFGALBIN – 36-Inch
- 3DHFGALBIN – French Door



LARGE ICE BUCKET

- ICEBUCKETL

REFRIGERATION FILTERS

REPLFLTR10

Water Filter
Replacement water filter for use in all freezer and bottom freezer models.

SCRNFLTR10

Filter By-Pass
Filter by-pass for use with existing in-home water filtration systems. For all freezer and bottom freezer models.

REFRIGERATION HANDLES

NOTE:

Choose one handle for each Column, choose two handles for each 2-Door Bottom Freezer and choose three handles for each French Door Bottom Freezer.



PROFESSIONAL SERIES

- PR36HNDL20 – 36-Inch Professional
- PR30HNDL20 – 30-Inch Professional



MASTERPIECE® SERIES

- MS36HNDL20 – 36-Inch Masterpiece
- MS30HNDL20 – 30-Inch Masterpiece



PROFESSIONAL SERIES – CLASSIC

- PR36HNDL10 – 36-Inch Professional Classic
- PR30HNDL10 – 30-Inch Professional Classic



MASTERPIECE® SERIES – CLASSIC


- MS36HNDL10 – 36-Inch Masterpiece Classic
- MS30HNDL10 – 30-Inch Masterpiece Classic

INSTALLATION ACCESSORIES

FRAMEKIT10

Freedom® Frame Kit

Included with all pre-assembled bottom freezers, this adjustable frame is also available as an optional accessory for use with any custom column for installation in 24-inch (610 mm) deep cutouts. The kit includes two identical and reversible metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.



HEATRKIT10 – 27W @ 120V

HEATRKIT20 – 13W @ 120V

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

FREEDOM® COLLECTION

PLANNING INFORMATION

ELECTRICAL SPECIFICATIONS

The appliance comes with a 3-wire power supply cord. UL listed in the USA.

The appliance requires a 3-wire receptacle that is fitted with a 15 Amp fuse or higher. Refer to the following table for max load details.

| APPLIANCE | MAX LOAD |
|-------------------------------------|---------------|
| | 120V AC, 60Hz |
| 23.5-Inch Fresh Food Column | 15 A |
| 24-Inch Fresh Food Column | 15 A |
| 30-Inch Fresh Food Column | 15 A |
| 36-Inch Fresh Food Column | 15 A |
| 18-Inch Freezer Column* | 15 A |
| 24-Inch Freezer Column* | 15 A |
| 30-Inch Freezer Column* | 15 A |
| 36-Inch Freezer Column* | 15 A |
| 18-Inch Wine Preservation Column | 15 A |
| 24-Inch Wine Preservation Column | 15 A |
| 30-Inch 2-Door Bottom Freezer* | 15 A |
| 36-Inch 2-Door Bottom Freezer* | 15 A |
| 36-Inch French Door Bottom Freezer* | 15 A |

*Including ice maker

The receptacle must be installed by a licensed electrician only. For the installation position of the receptacle refer to diagram in "Electrical Location".

GROUNDING INSTRUCTION

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for the electric current.

ADDITIONAL GROUNDING PROCEDURE

Some local regulations may require a separate ground. In such cases, the required accessory ground wire, clamp and screw must be purchased separately. Never ground the appliance to plastic plumbing lines, gas lines or water pipes.


A 4-conductor cord shall be used when the appliance is installed in an area where local codes do not permit grounding through the neutral. Power supply cord must be replaced by a licensed electrician only.

WARNING

Improper connection of the equipment grounding conductor may result in electric shock. Have the appliance checked by a qualified electrician or service technician if you are in doubt as to whether the appliance has been properly grounded.

ELECTRICAL LOCATION

Connect the appliance to an outlet that is near the appliance. The outlet must be freely accessible following installation of the appliance.

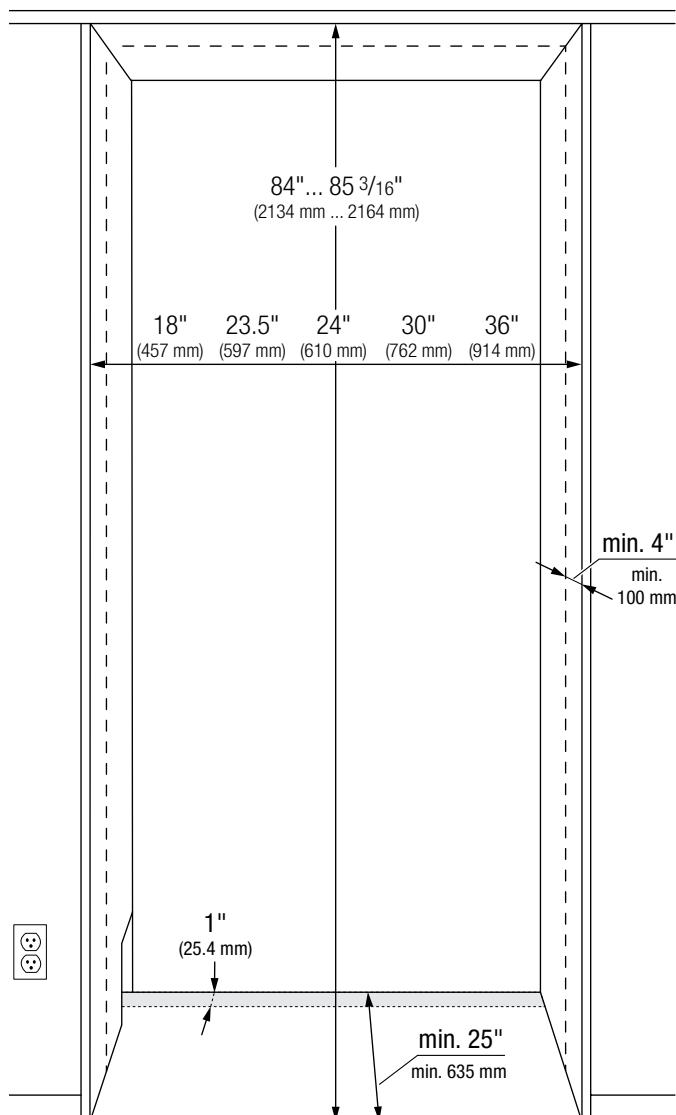

FREEDOM® COLLECTION


PLANNING INFORMATION

WATER LOCATION

A cold water connection is required for appliances that feature an ice maker or an ice and water dispenser.

The water pressure must be between 40 and 120 p.s.i. (2.75-8.25 bar). The installation must comply with local plumbing regulations. A separate shut-off valve must be installed for the appliance water connection.

The shut-off valve for the water connection may not be behind the appliance. It is recommended to place the shut-off valve outside the cutout next to the appliance or in another easily accessible location. When installing the water connection, observe the permitted installation areas for the water supply line. The supply line can be located to the right (a), to the left (b), or underneath (c).

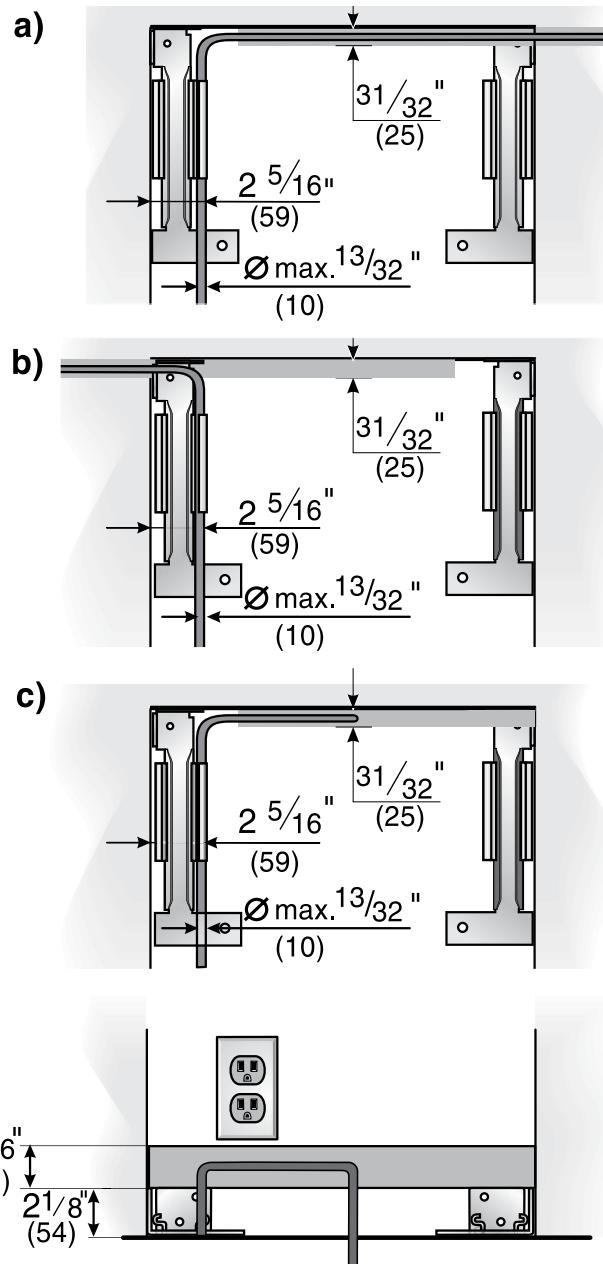

FREEDOM® COLLECTION

INSTALLATION DIMENSIONS

CABINETRY TERMS & BASIC REQUIREMENTS

To clarify the terms that are used in this design guide, please refer to the following definitions:

CASE

This is the main body of a kitchen cabinet.

(CABINET) FACE FRAME

This is a decorative frame at the front of a kitchen cabinet representing the space between cabinetry doors or drawers and is typical for North America. European style cabinets (frameless cabinetry) typically do not have a face frame.

DOOR PANEL


Able to be fully flush integrated when installed in 25" (635 mm) deep cabinets, Freedom® Collection refrigerators are intentionally designed to be equipped with custom door panels that perfectly match surrounding kitchen cabinetry. Typical panel thickness is 3/4" (19 mm). However, thicker panels can be accommodated to emulate the look of the visible face frame (as in overlay) or to match existing kitchen cabinetry doors. When using custom panels, always ensure that the panel reverse is finished to match the exterior, as parts of the panel reverse will be visible when the refrigerator door is opened.

CUTOUT (NICHE)

The cutout is the cavity in which a Freedom® Collection appliance is installed. The width of the cutout (18-inch, 23.5-inch, 24-inch, 30-inch or 36-inch) is dependent on the appliance(s). The total depth of the cutout is equal to the depth of the case plus face frame. It does not necessarily include the thickness of the door panel. For proper planning of cutout depth, please refer to pages 378–381.

Typically, the cutout for a Freedom® Collection appliance will be 25" (635 mm) deep. When planning the cutout, it is essential that the top and side interior walls be flush to the appliance at a minimum depth of 4" (102 mm) from the outer edge of the face frame and composed of thick (5/8" (16 mm) minimum) material for secure installation. Also, because the case interior will be partially visible when the refrigerator door is opened, always ensure that the top and side returns are finished to match the exterior furniture at the same minimum depth of 4" (102 mm).

KITCHEN CABINETRY ILLUSTRATION

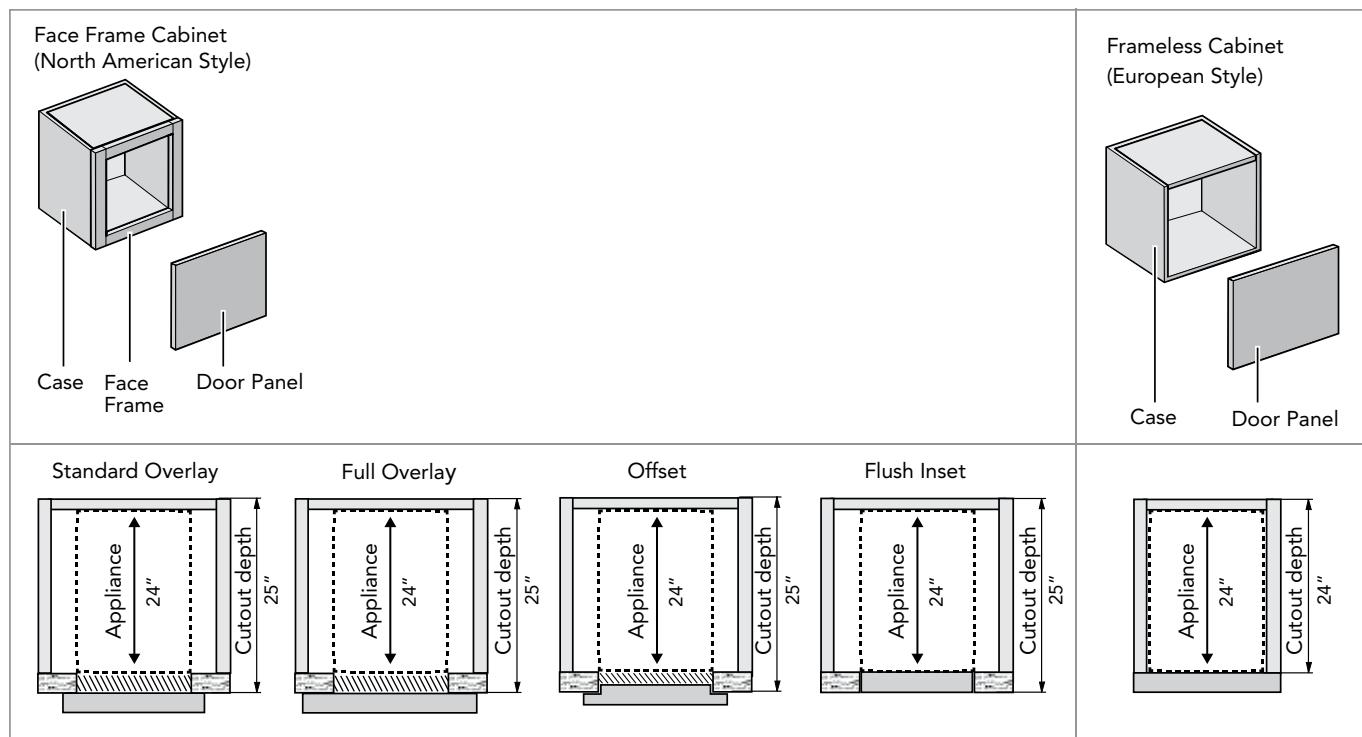

FREEDOM® COLLECTION

INSTALLATION DIMENSIONS

CABINETRY STYLE & CUTOUT DEPTH

Freedom® Collection refrigeration appliances are designed to accommodate nearly any type of kitchen cabinetry door installation. Generally, when using standard $\frac{3}{4}$ " (19 mm) panels, 25" (635 mm) deep cutouts are recommended but the required cutout depth depends on the desired cabinetry and custom panel execution, whether typical North American styles that employ a face frame—requiring a depth of 25" (635 mm)—or European style—requiring a depth of 24" (610 mm).

The below cabinetry styles detail requirements for the cutout and custom panel.

A) STANDARD (PARTIAL) OVERLAY – 25" (635 MM) CUTOUT DEPTH

With standard overlay kitchen cabinetry the face frame is an important design element. In order to emulate this aesthetic for the refrigerator, one must account for the door panel thickness (typically $\frac{3}{4}$ " (19 mm)) as well as the face frame thickness (here, also $\frac{3}{4}$ " (19 mm)). The resulting thickness of the custom door panel is therefore $\frac{3}{4}$ " (19 mm) + $\frac{3}{4}$ " (19 mm) = 1 1/2" (38 mm). The cumulative thickness of the custom door panel requires added depth in the cutout so 25" (635 mm) is recommended (see sketch).

B) FULL OVERLAY – 25" (635 MM) CUTOUT DEPTH

The requirements for standard overlays are also valid for full overlay designs so 25" (635 mm) cutout depth is recommended. However, especially if kitchen cabinet doors are thinner than $\frac{3}{4}$ " (19 mm) or reveals are $\frac{1}{8}$ " (3 mm) or smaller, a 24" (610 mm) cutout depth may also be acceptable. In this execution both the cabinet door and the small reveal of the fully overlaid face frame must be emulated within the typical appliance door panel thickness of $\frac{3}{4}$ " (19 mm). This can be done either a) by simply ignoring the visible area of the face frame (very small reveals show virtually no face frame) or b) by creating a "nose" on the custom door panel to emulate a small visible face frame (see sketch).

C & D) OFFSET & FLUSH INSET – 25" (635 MM) CUTOUT DEPTH

Here, kitchen cabinetry door panels do not rest atop the cabinet face frame (overlay), but are instead inserted partially (offset) or fully flush (inset) into the face frame. Such offset or flush inset door panels require additional depth in the cutout. Using the example of a $\frac{3}{4}$ " (19 mm) thick panel, the complete cutout depth would be 24" (610 mm) + $\frac{3}{4}$ " (19 mm) = 24 3/4" (629 mm) and in this example 25" (635 mm) is recommended.


E) FRAMED – 24" (610 MM) CUTOUT DEPTH

For Freedom® Collection refrigeration appliances, a metal frame (FRAMEKIT10) may be affixed to the side of the cabinet which conveniently hides unfinished case returns and provides a classic built-in look. This is particularly relevant for existing cabinetry that has not been custom-built to accommodate these appliances. A 24" (610 mm) cutout will result in a slightly protruding door panel for a typical built-in look.

F) EUROPEAN STYLE KITCHEN CABINETRY – 24" (610 MM) CUTOUT DEPTH


If the kitchen design is based on European style cabinetry, there is no need to emulate the look of a face frame, as such a frame is not an element of the kitchen cabinetry design. Therefore a 24" (610 mm) deep cutout with accompanying custom panel will always be sufficient.

A) STANDARD OVERLAY DESIGN



Custom Door Panel (Emulating a Face Frame)

B) FULL OVERLAY DESIGN



Custom Door Panel with Nose (Emulating a Face Frame)

IMPORTANT

It is strongly recommended the top interior of the cutout be of solid material ($\frac{5}{8}$ " (16 mm) thickness). Ensure that the top well is completely flush for a depth of at least 4" (102 mm).


Ensure that the side walls of the cutout are also completely flush to a depth of at least 4" (102 mm).

If, for some reason, a separate cutout cabinet is created, ensure that the furniture return is at least 4" (102 mm) deep for proper installation.

FREEDOM® COLLECTION

INSTALLATION DIMENSIONS

PLANNING EXAMPLE #1: FRAMELESS (EUROPEAN) CABINETRY


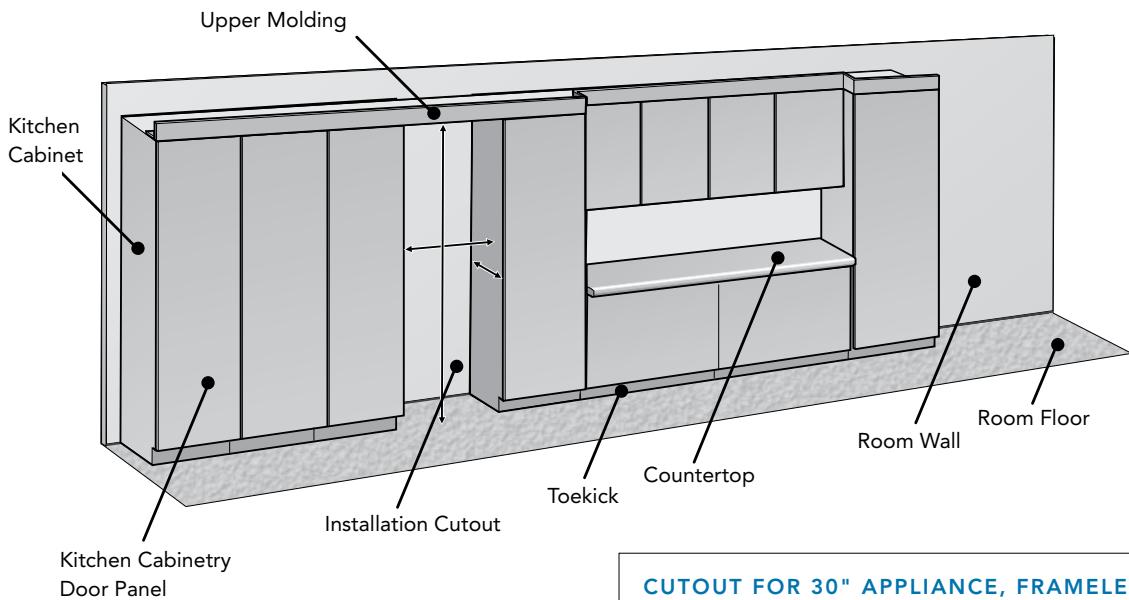


CUTOUT FOR 30" APPLIANCE, FRAMELESS CABINETRY:

In this example, the installation cutout is formed by simply leaving a gap between two kitchen cabinets.

The custom door panel 3/4" (19 mm) will be identical in appearance and thickness to the surrounding kitchen cabinetry panels.

- cutout width is exactly 30" (762 mm)
- cutout (case) depth is 24" (610 mm)—does not include door panel
- top and side walls of cutout interior are completely flush, of solid material and at least 4" (102 mm) deep

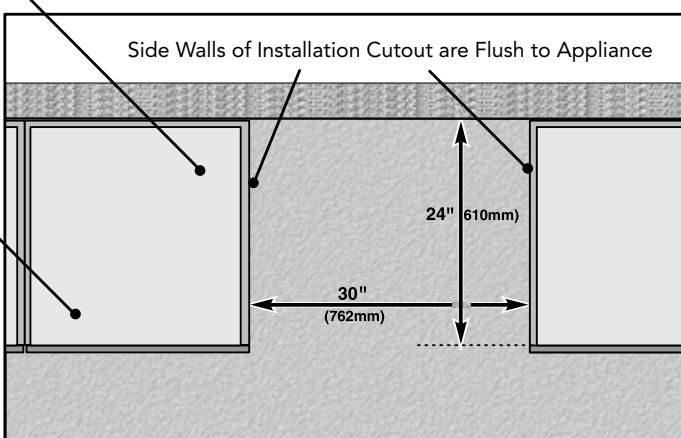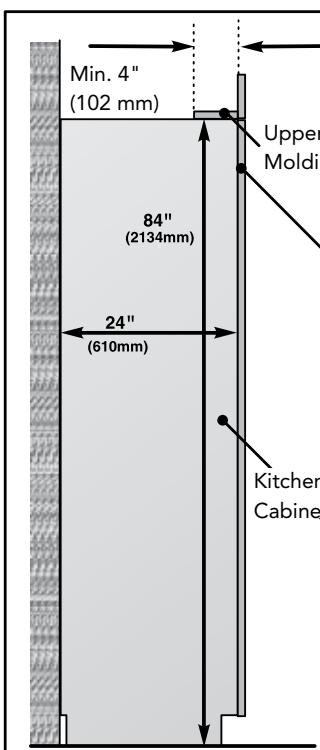



INSTALLATION CUTOUT
(VERTICAL SECTION)

30-INCH INSTALLATION CUTOUT (HORIZONTAL SECTION)

FREEDOM® COLLECTION

INSTALLATION DIMENSIONS


PLANNING EXAMPLE #2: STANDARD OVERLAY CABINETRY

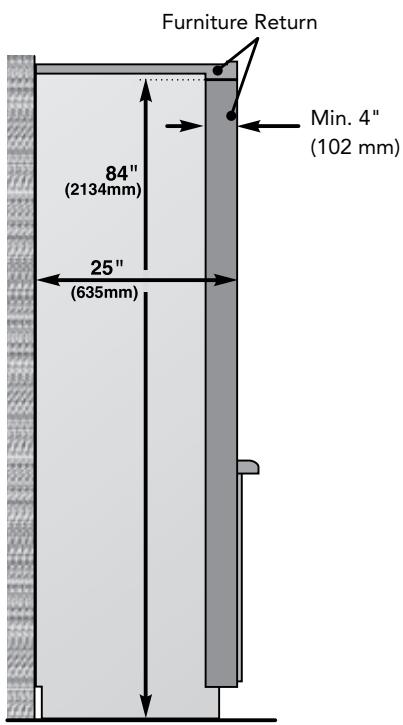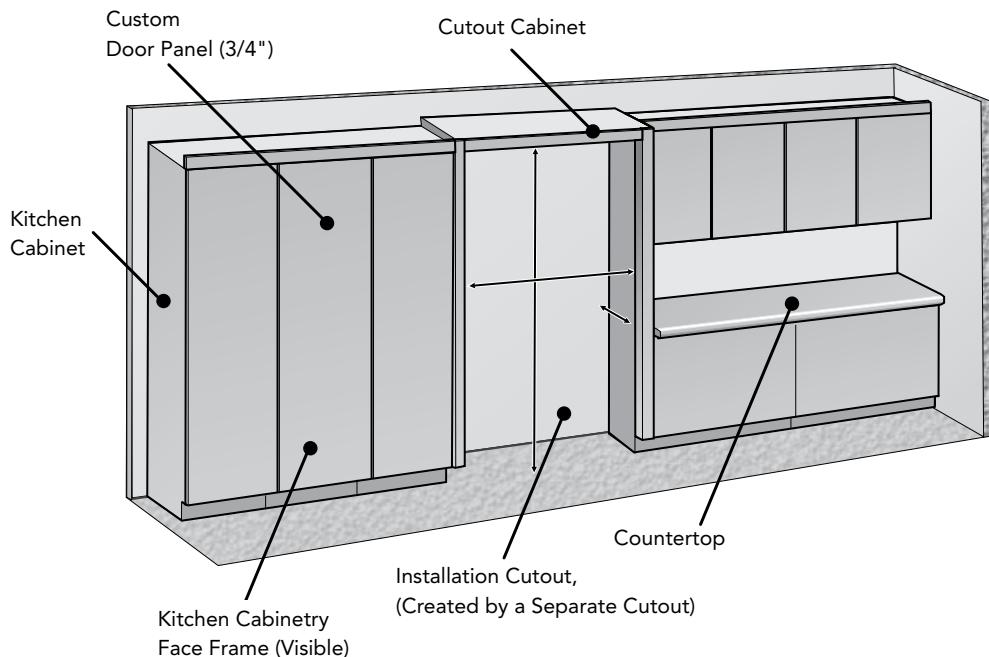

CUTOUT FOR 42" SIDE-BY-SIDE APPLIANCE COMBINATION, STANDARD OVERLAY CABINETRY:

In this example, the installation cutout is formed by creating a separate cutout around the appliances. It yields a look that deviates from the general kitchen design. The custom door panel has a cumulative thickness of 1 1/2" (38 mm), 3/4" (19 mm) emulating the face frame and 3/4" (19 mm) for the actual door panel. Thus, a 25" (635 mm) deep installation cutout is required.

- cutout width is exactly 42" (for an 18" + 24" = 42" side-by-side combination)
- cutout (case) depth is 25" (635 mm) due to 1 1/2" (38 mm) custom door panel
- any furniture return must be at least 4" (102 mm) deep, on interior top and sides, of solid material and should be finished to match the exterior at the same depth (4" or 102 mm)

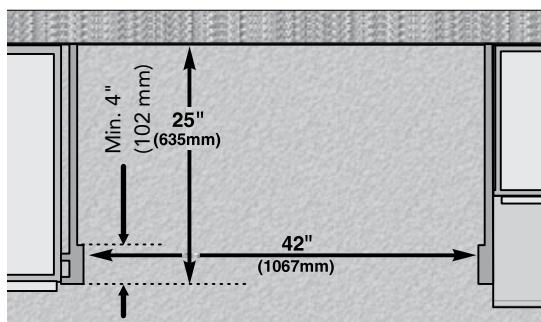


FREEDOM® COLLECTION


INSTALLATION DIMENSIONS

TOEKICK & VENTING GRILLE

Each Freedom® Collection refrigeration appliance comes with a 4" (102 mm) tall stainless steel toekick. A custom-made toekick that matches the surrounding cabinetry may be applied instead. While standard toekick height is 4" (102 mm), depending on the usage of the leveling legs, the toekick height could vary. Regardless of toekick height, it is imperative that the venting grille remain unblocked to ensure proper functionality of the appliance. Decorative toekicks should be removable to allow for servicing.

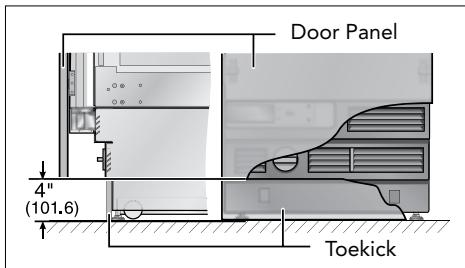

Typical 4" (102 mm) toekick height. Velcro adhesive strips are used to fasten the toekick to the appliance. Venting grille and (if applicable) the water filter cavity are located above the toekick area.

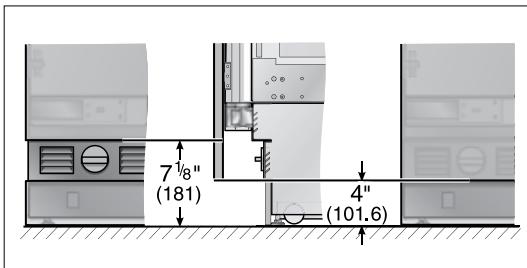

If required by the surrounding cabinetry design, the distance between the bottom edge of the door panel and the floor can be increased from approx. 4" (102 mm) up to 7 1/8" (181 mm), but should not be decreased. Note, however, that the venting grille and (if applicable) water filter cavity will be visible, even if the door is closed.

UPPER MOLDING

The planning of decorative upper molding above the cutout requires taking into account the actual or desired height of the door panel. The overall height of the door panel will depend on:

- the height of the appliance, typically 84" (2134 mm)—leveling legs allow height adjustment ranging from -1/2" (-13 mm) to +1 3/8" (+35 mm)
- the installed height of the door panel (distance from the bottom edge of the door panel to the floor, typically 4" (102 mm), and, if desired, any extension of the custom panel above the appliance cutout)
- the appliance type (single door or bottom freezer)

IMPORTANT

Please recall that a panel should be installed at a minimum height of 4" (102 mm) from the floor to allow proper ventilation of the appliance.

Always ensure that the top of the cutout or upper decorative molding is at least 4" (102 mm) deep, so that the refrigerator can be properly secured to the cutout wall. This is particularly important if a protruding cutout is specially created and configured with a face frame. Furniture returns for any face frame must be a minimum of 4" (102 mm) deep.


DOOR SWIVEL RANGE

It is absolutely essential to ensure that the appliance is installed in such a way that the doors (including handles) and adjacent cabinets, countertops, pilasters, walls or other kitchen elements do not interfere with one another when opened. The illustrations below depict the swivel range of the Freedom® Collection refrigerator doors including mounted door panels of both 3/4" (19 mm) and 1 1/2" (38 mm) thickness.

In the event of door interference the following solutions may be employed:

- Limit the refrigerator door opening angle to 90° with a door stop pin inserted into the hinge.
- Reduce the door panel thickness (if larger than 3/4" (19 mm)).
- Install a spacer between the appliance and the kitchen element that creates the interference.
- Rearrange the opposing kitchen element that creates the problem.
- Create a protruding cutout for the appliance.


VERTICAL SECTION, SIDE VIEW:

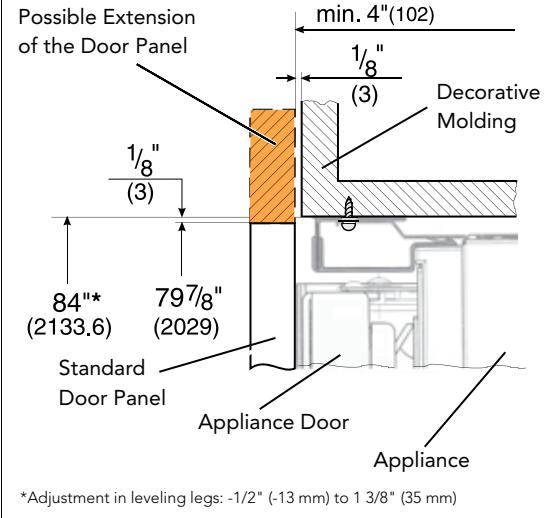


FREEDOM® COLLECTION

INSTALLATION DIMENSIONS

DOOR SWIVEL RANGE – 3/4" (19 MM) FLUSH APPLIANCE DOOR PANEL

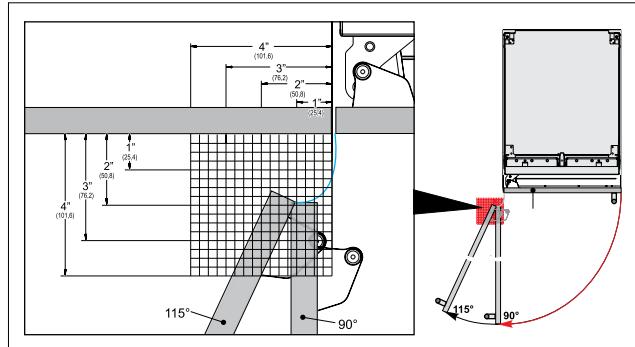


DOOR SWIVEL RANGE – 1 1/2" (38 MM) FLUSH APPLIANCE DOOR PANEL

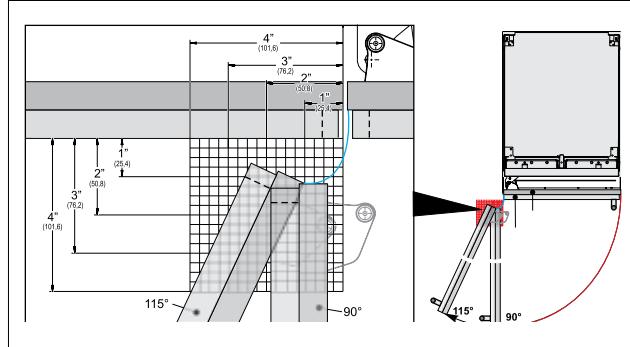


HANDLE INSTALLATION AND DIMENSIONS

PROFESSIONAL HANDLE

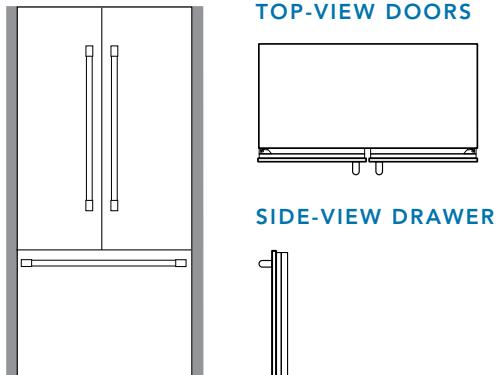


PROFESSIONAL SERIES

PR36HNDL20



Measurements in inches (mm)


PR30HNDL20*



Measurements in inches (mm)


PROFESSIONAL SERIES – CLASSIC

PR36HNDL10




*For use with 30" bottom freezer T30IB900SP drawer only

MASTERPIECE® HANDLE

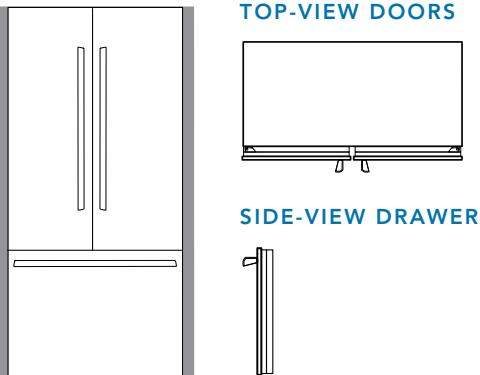


MASTERPIECE® SERIES

MS36HNDL20



Measurements in inches (mm)


MS30HNDL20*




Measurements in inches (mm)

MASTERPIECE® SERIES – CLASSIC

MS36HNDL10



MS30HNDL10*




FREEDOM® COLLECTION


INSTALLATION

23.5-INCH CUSTOM FRESH FOOD COLUMN T23IR900SP


CUTOUT DIMENSIONS

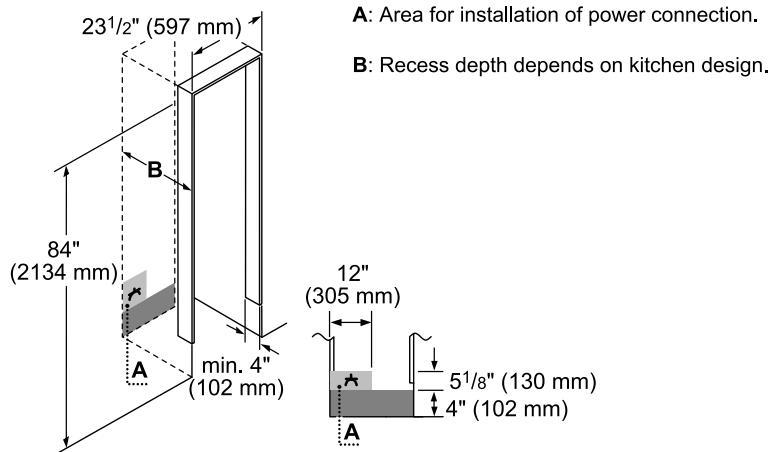

TOP VIEW CLEARANCE

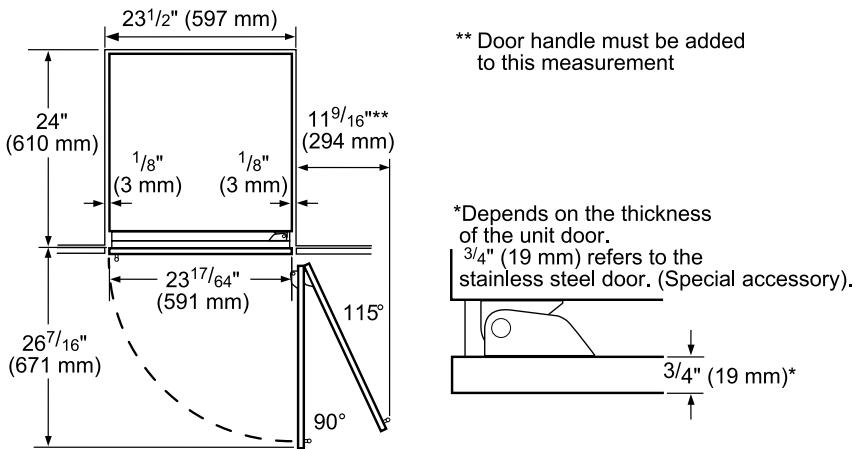


PANEL DIMENSIONS

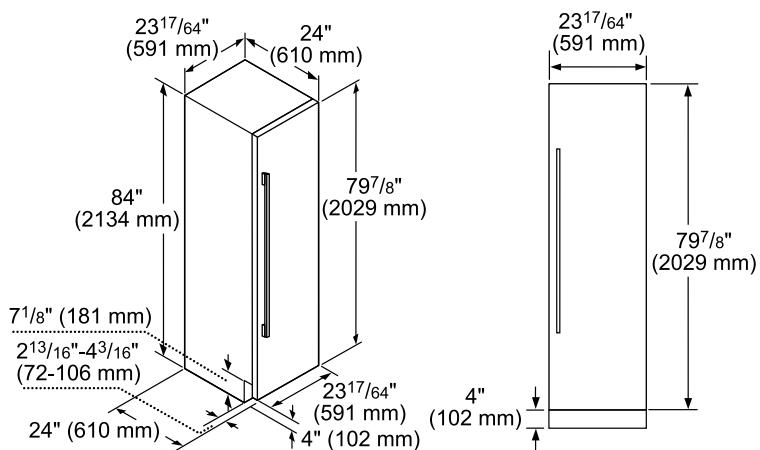

24-INCH CUSTOM FRESH FOOD COLUMN
T24IR900SP


CUTOUT DIMENSIONS

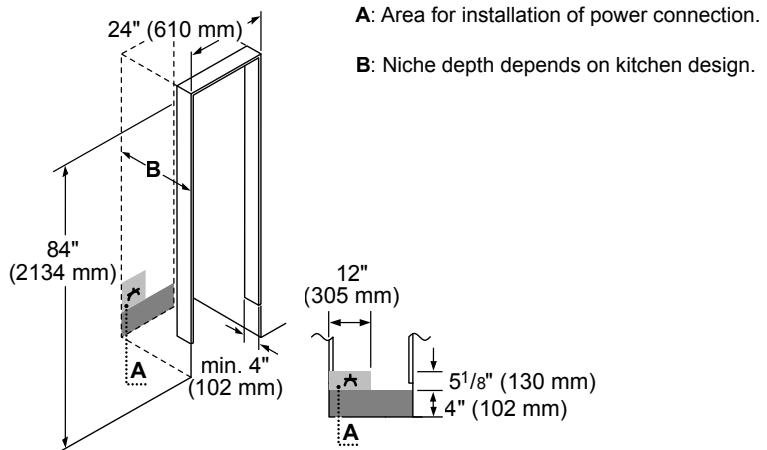


A: Area for installation of power connection.

B: Niche depth depends on kitchen design.

TOP VIEW CLEARANCE

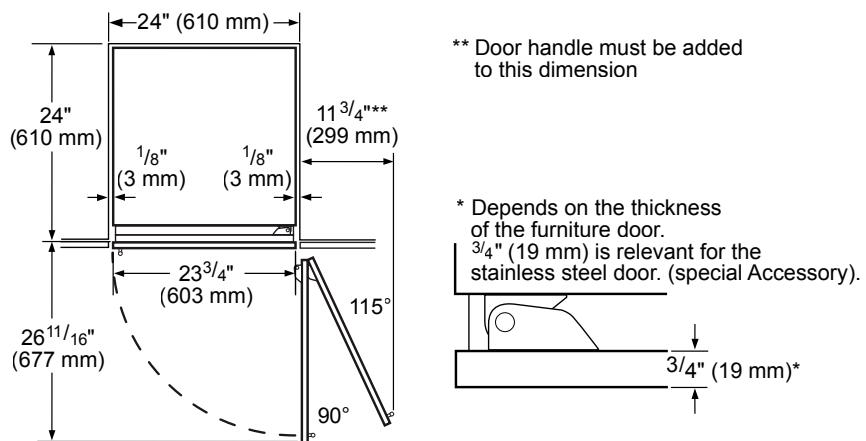

PANEL DIMENSIONS

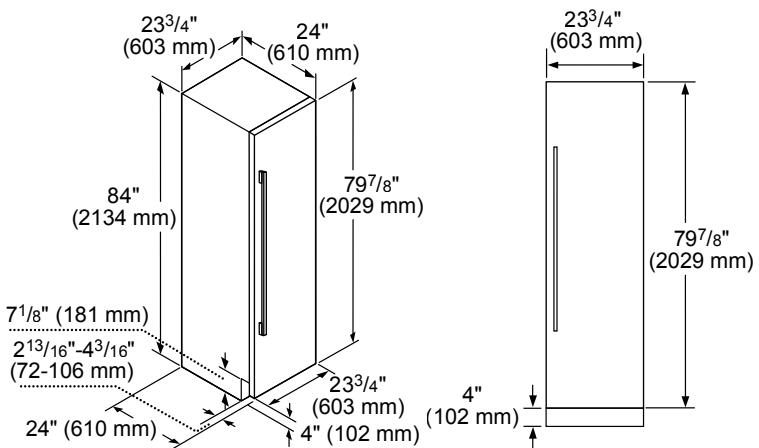


FREEDOM® COLLECTION


INSTALLATION

30-INCH CUSTOM FRESH FOOD COLUMN T30IR900SP


CUTOUT DIMENSIONS

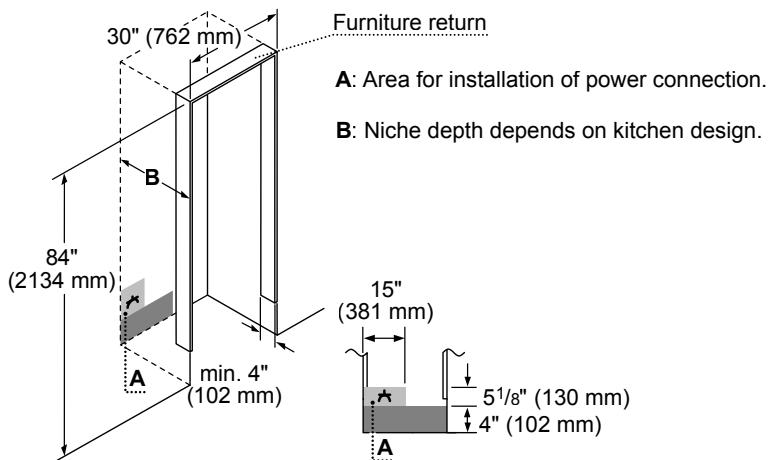

TOP VIEW CLEARANCE

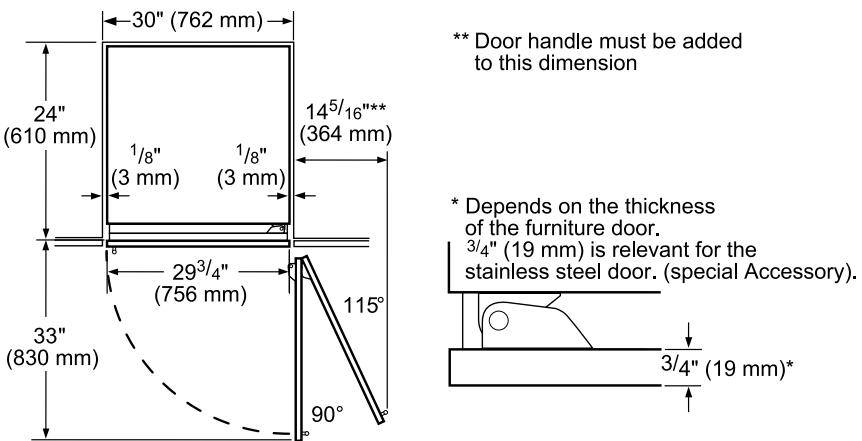

PANEL DIMENSIONS

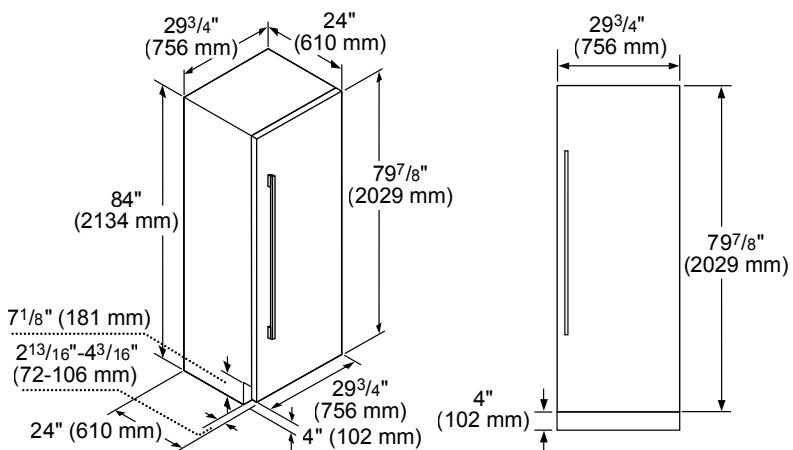


FREEDOM® COLLECTION


INSTALLATION

36-INCH CUSTOM FRESH FOOD COLUMN T36IR900SP


CUTOUT DIMENSIONS

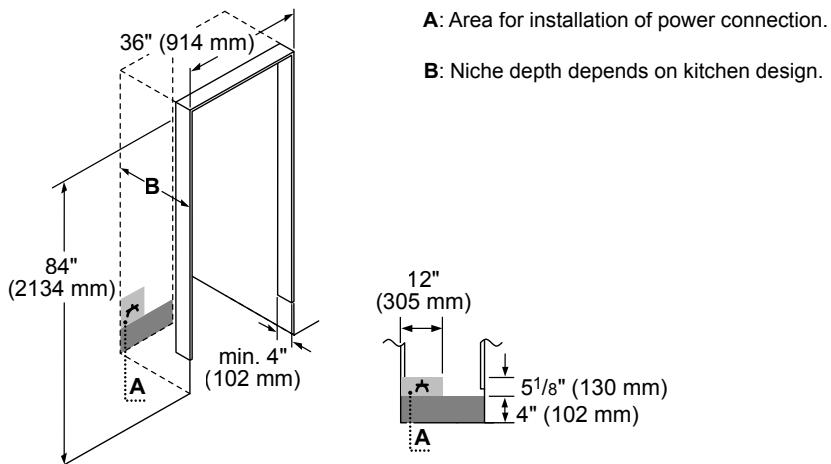

TOP VIEW CLEARANCE

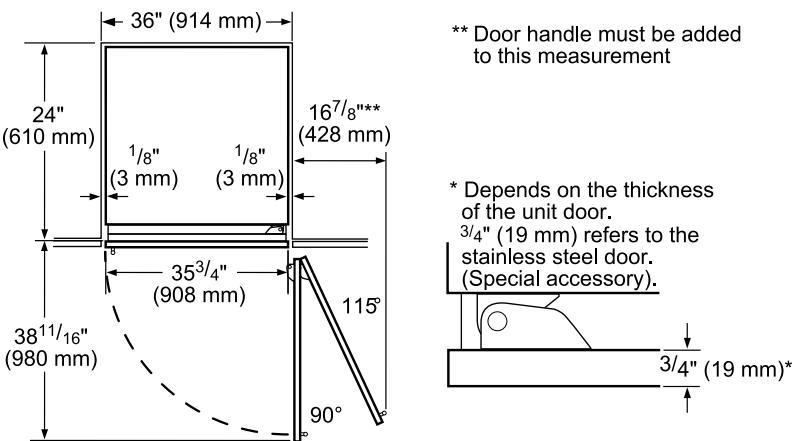

PANEL DIMENSIONS

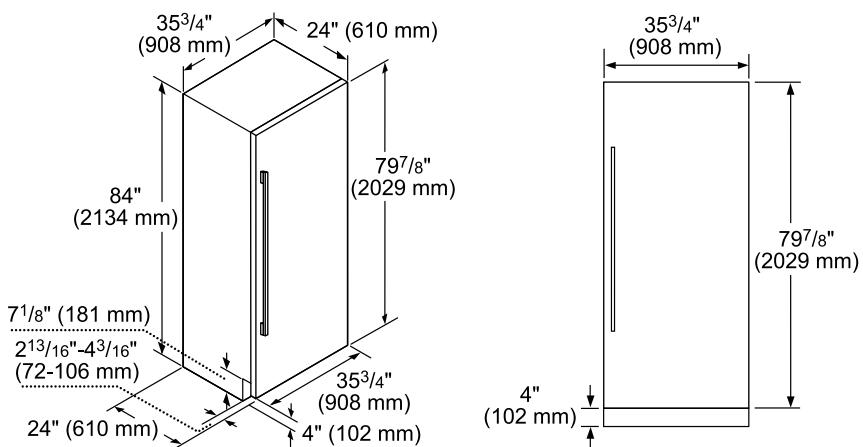


FREEDOM® COLLECTION

INSTALLATION



18-INCH CUSTOM FREEZER COLUMN

T18ID900RP / T18ID900LP



CUTOUT DIMENSIONS

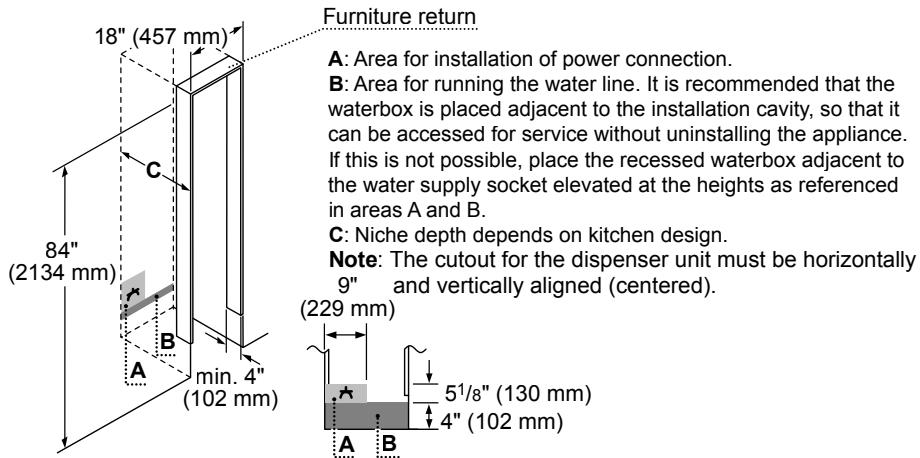

TOP VIEW CLEARANCE

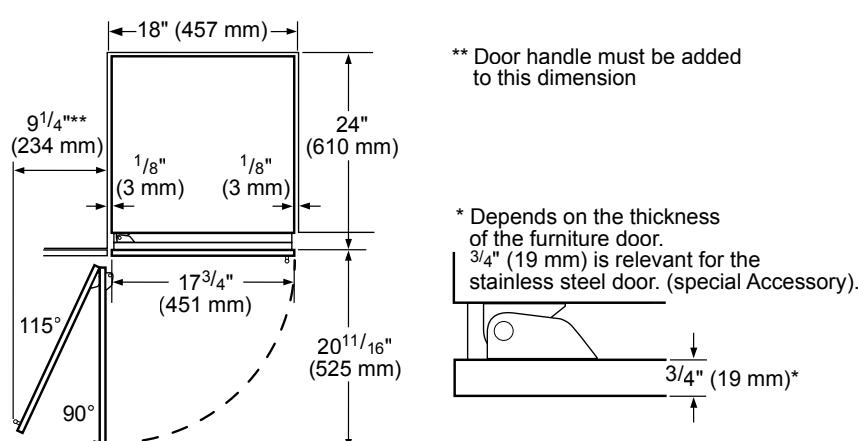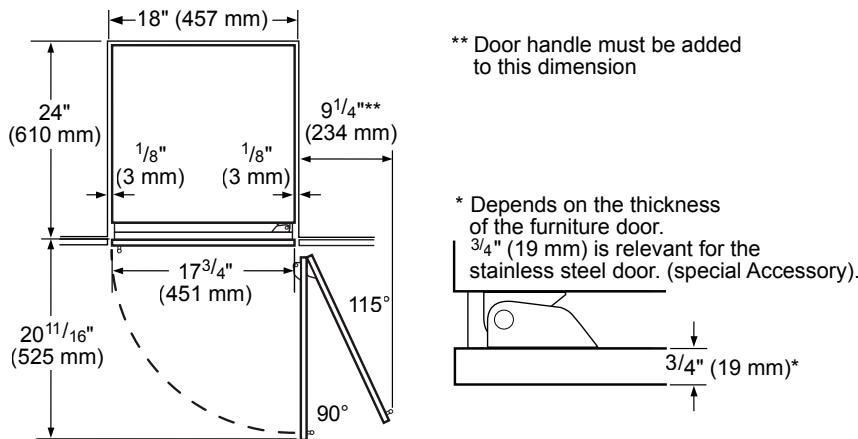

PANEL DIMENSIONS

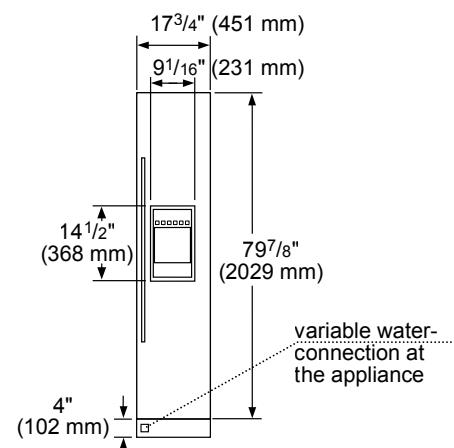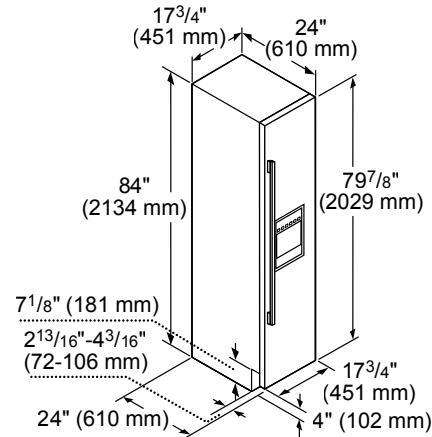


FREEDOM® COLLECTION


INSTALLATION

18-INCH CUSTOM FREEZER COLUMN T18IF900SP


CUTOUT DIMENSIONS

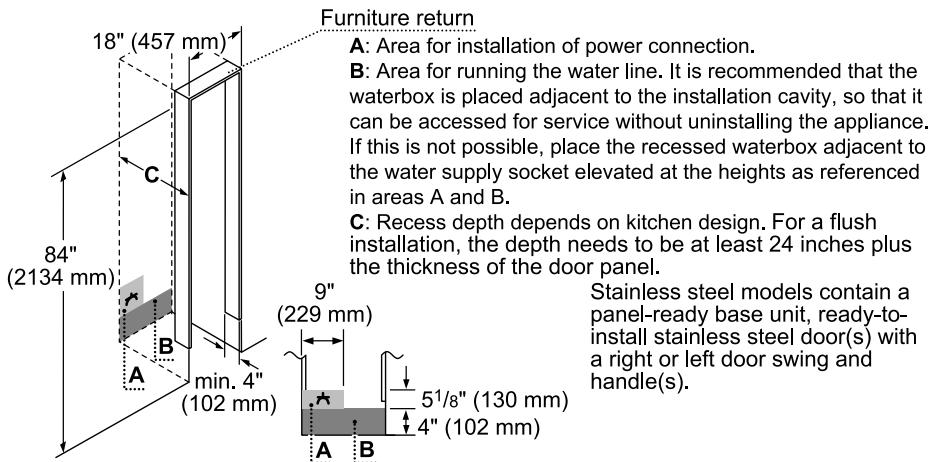

TOP VIEW CLEARANCE

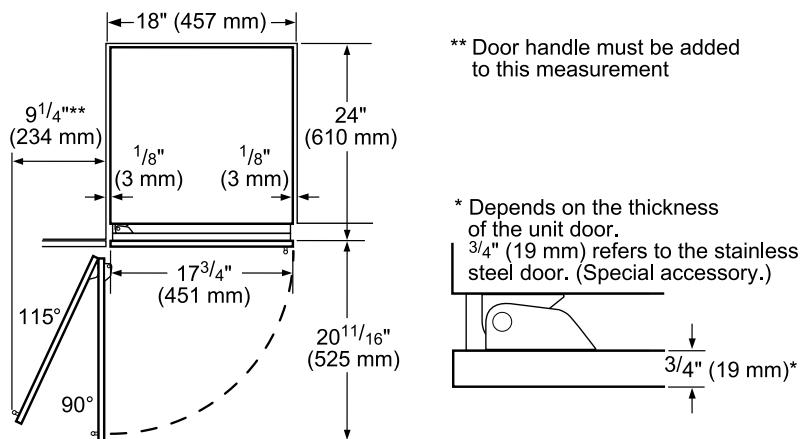

PANEL DIMENSIONS

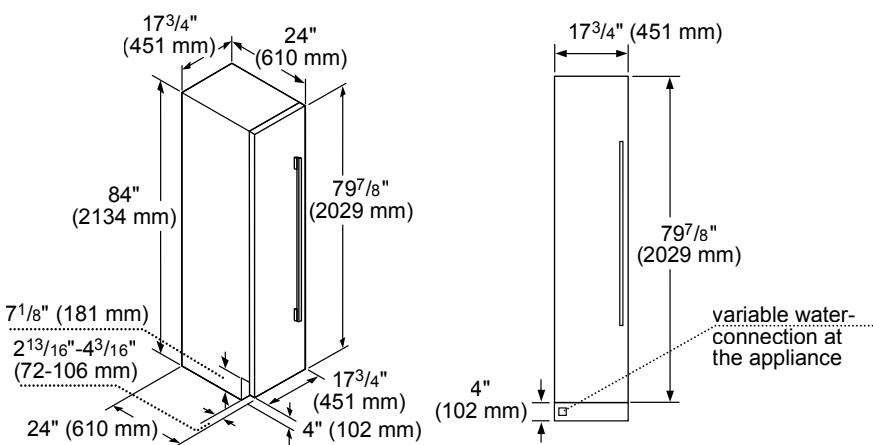


FREEDOM® COLLECTION


INSTALLATION

24-INCH CUSTOM FREEZER COLUMN T24ID900RP / T24ID900LP

CUTOUT DIMENSIONS


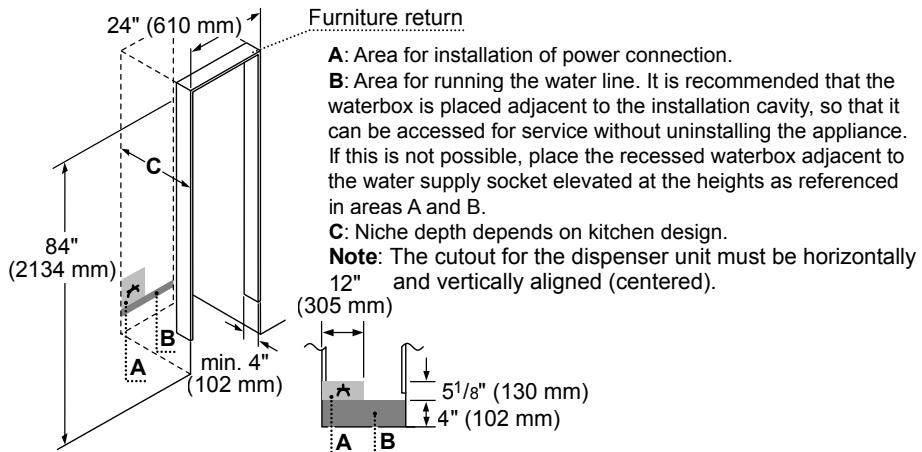


TOP VIEW CLEARANCE

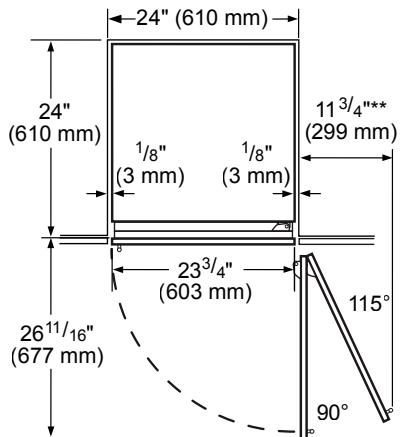


** Door handle must be added to this dimension

*Depends on the thickness of the furniture door.
3/4" (19 mm) is relevant for the stainless steel door. (special Accessory)

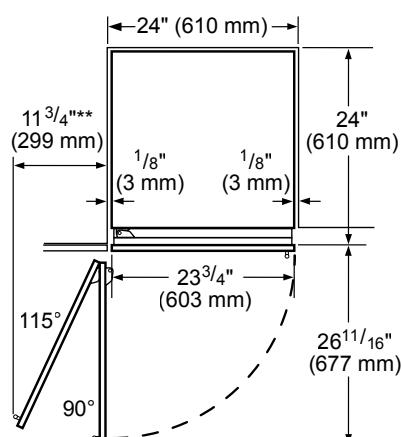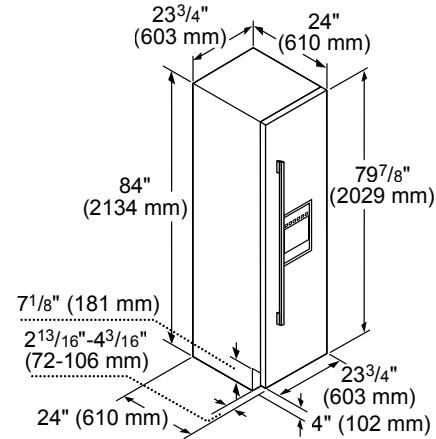

** Door handle must be added to this dimension

- * Depends on the thickness of the furniture door.
3/4" (19 mm) is relevant for the standard steel door (special accessories).

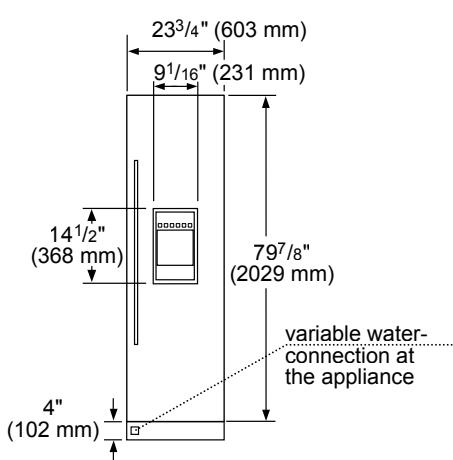


FREEDOM® COLLECTION


INSTALLATION

24-INCH CUSTOM FREEZER COLUMN T24IF900SP


CUTOUT DIMENSIONS

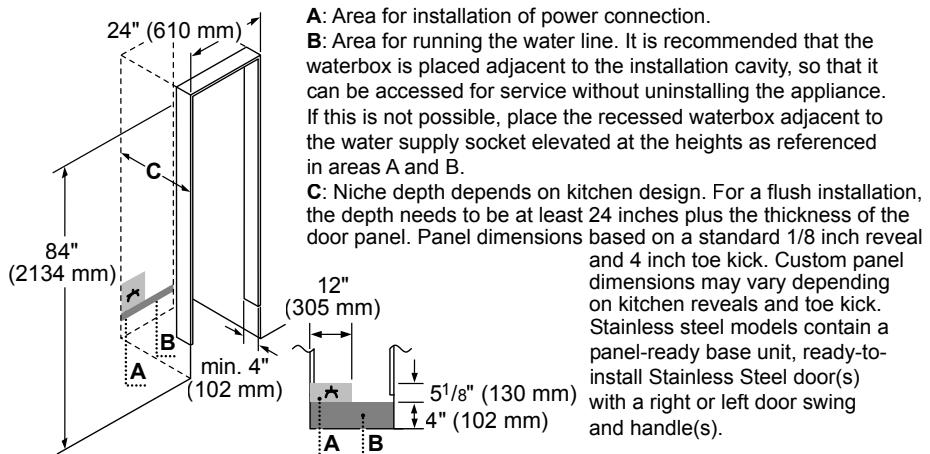

TOP VIEW CLEARANCE

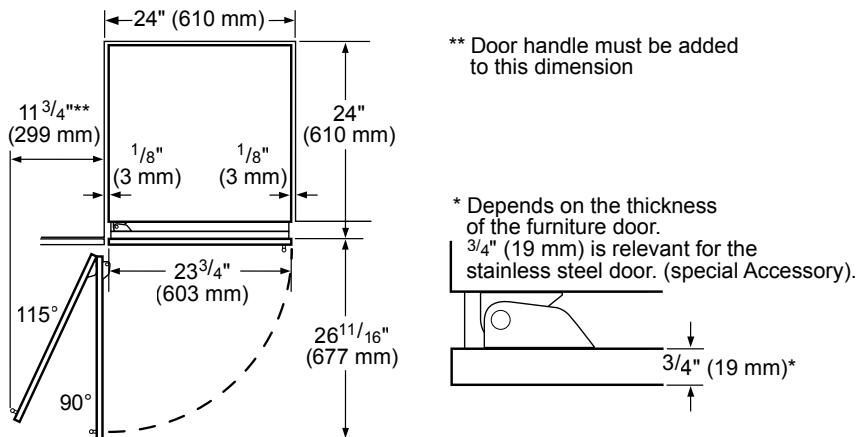

PANEL DIMENSIONS

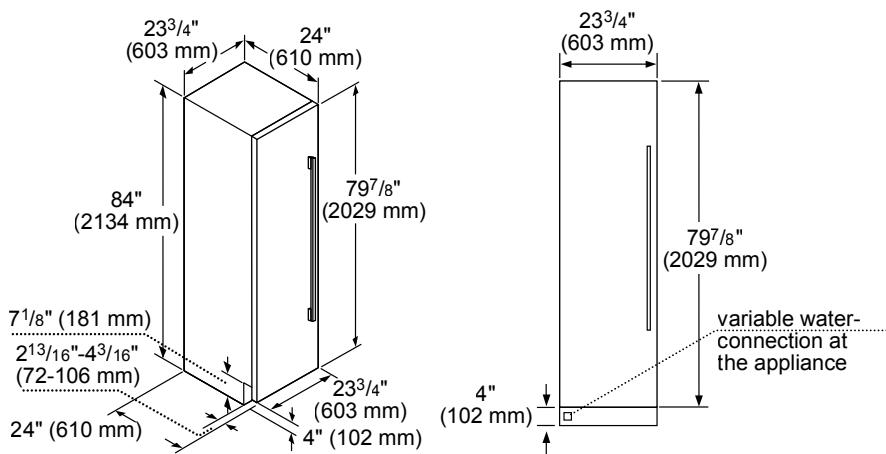


FREEDOM® COLLECTION

INSTALLATION


30-INCH CUSTOM FREEZER COLUMN

T30IF900SP


CUTOUT DIMENSIONS

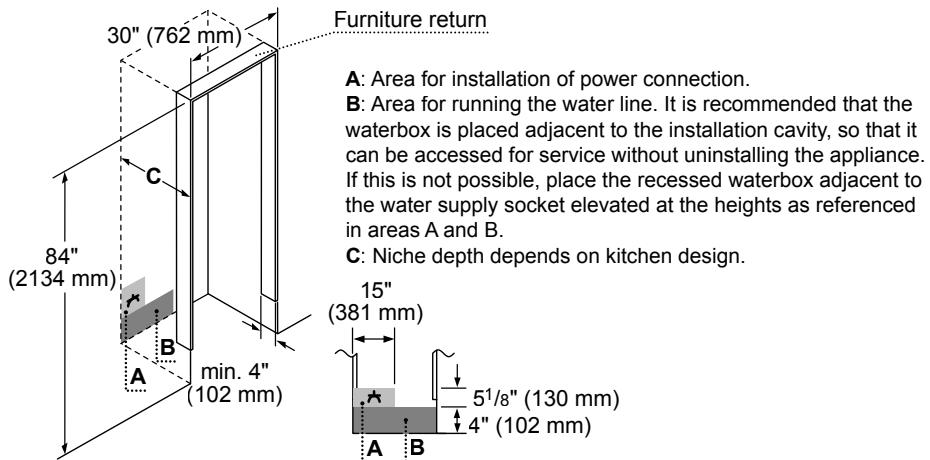

TOP VIEW CLEARANCE

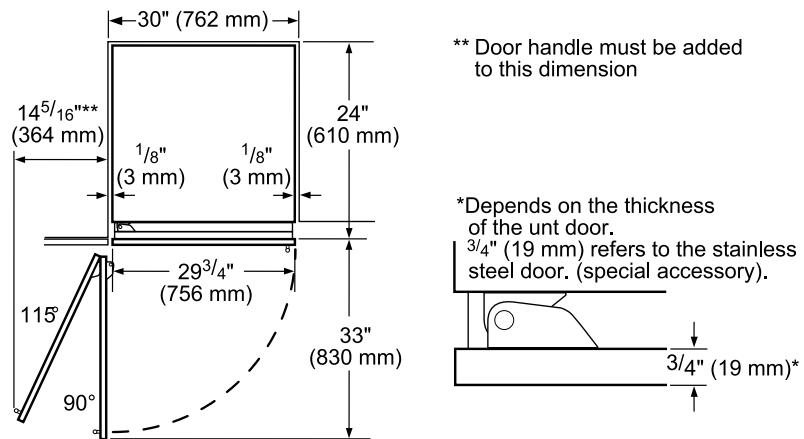

PANEL DIMENSIONS

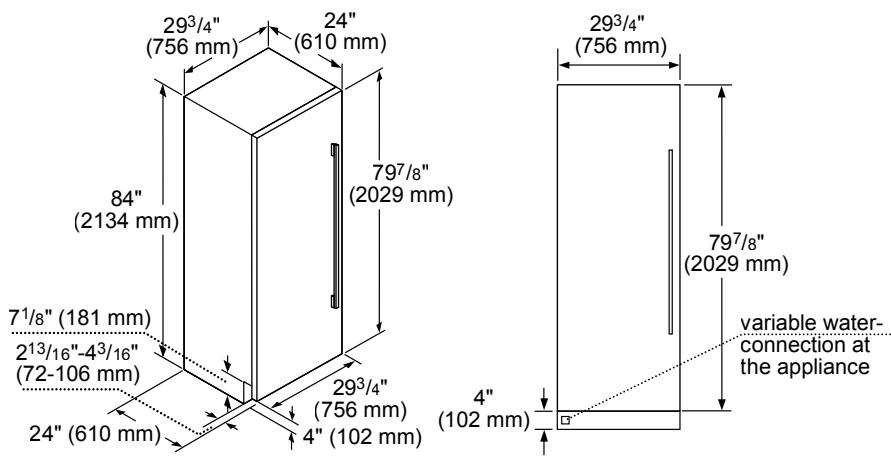


FREEDOM® COLLECTION


INSTALLATION

36-INCH CUSTOM FREEZER COLUMN T36IF900SP


CUTOUT DIMENSIONS

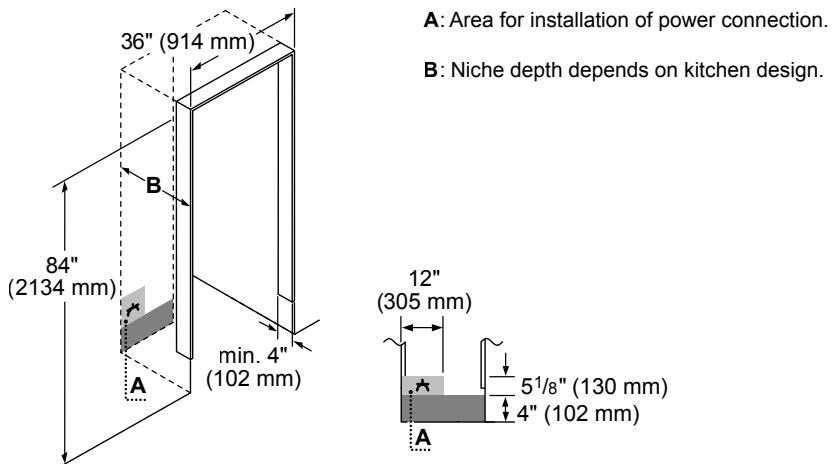

TOP VIEW CLEARANCE

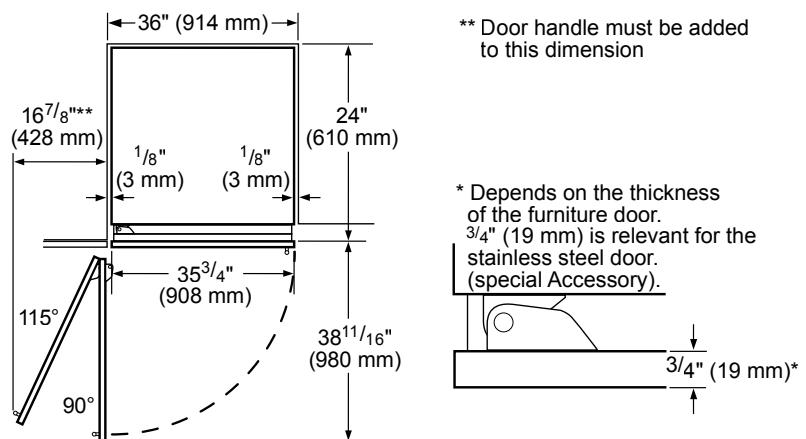

PANEL DIMENSIONS

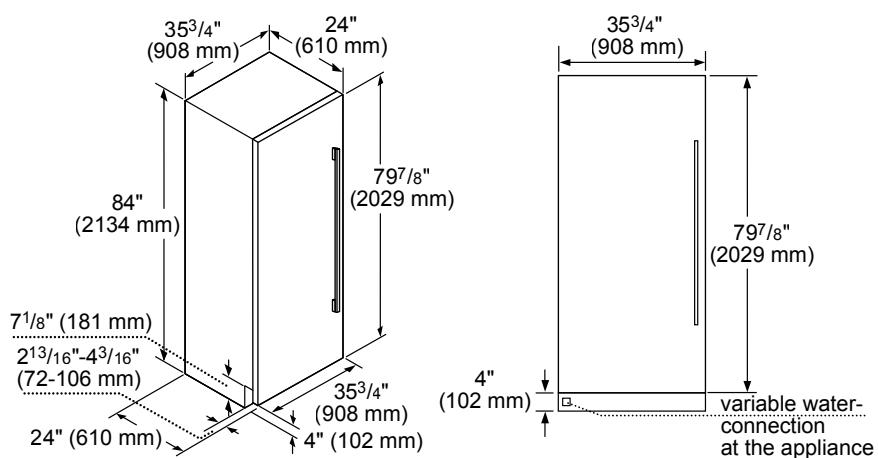


FREEDOM® COLLECTION


INSTALLATION

18-INCH CUSTOM WINE PRESERVATION COLUMN T18IW900SP


CUTOUT DIMENSIONS

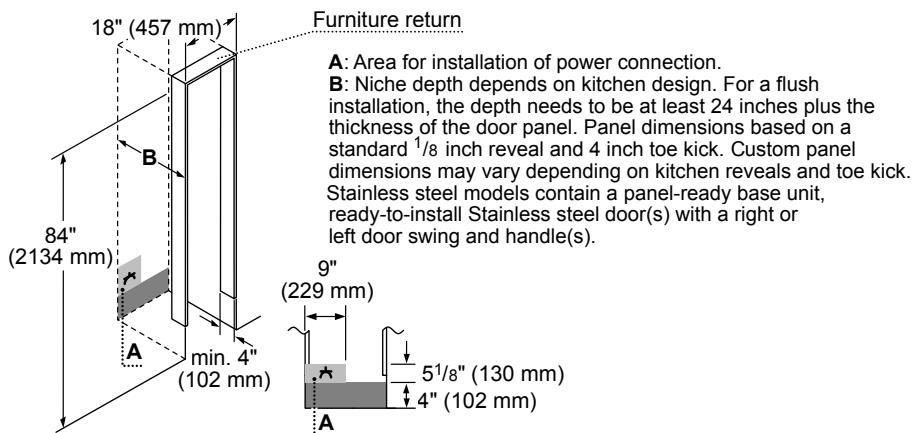

TOP VIEW CLEARANCE

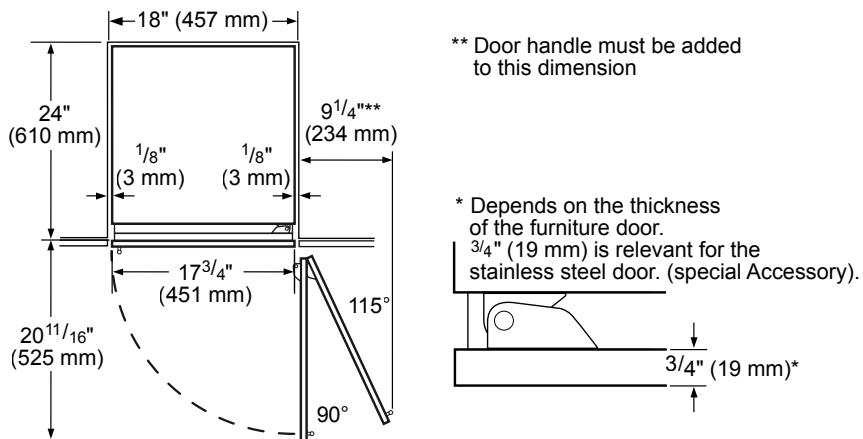

PANEL DIMENSIONS

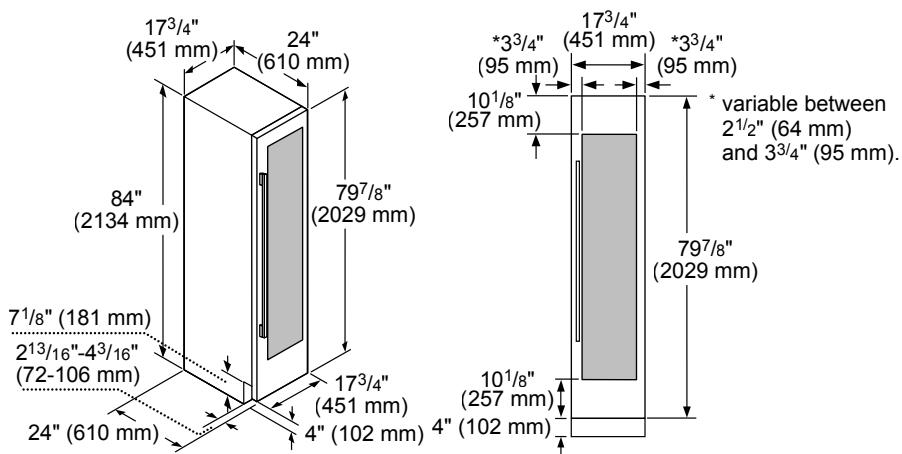


FREEDOM® COLLECTION


INSTALLATION

24-INCH CUSTOM WINE PRESERVATION COLUMN T24IW900SP


CUTOUT DIMENSIONS

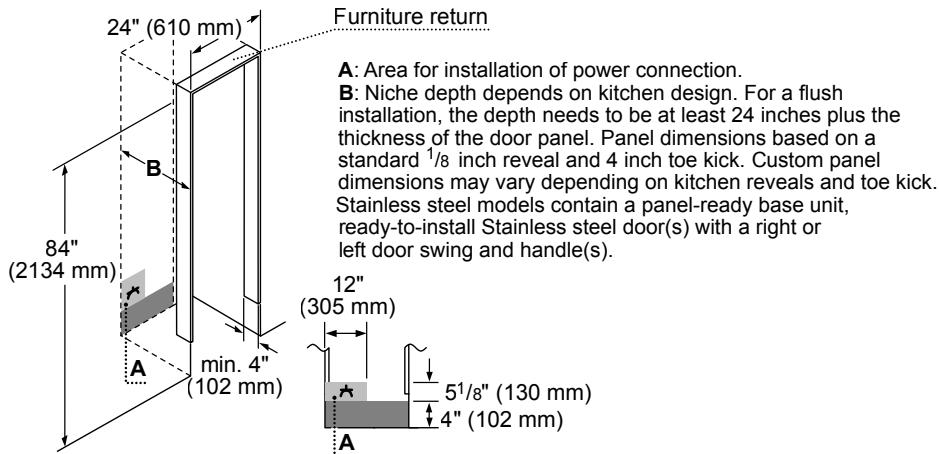

TOP VIEW CLEARANCE

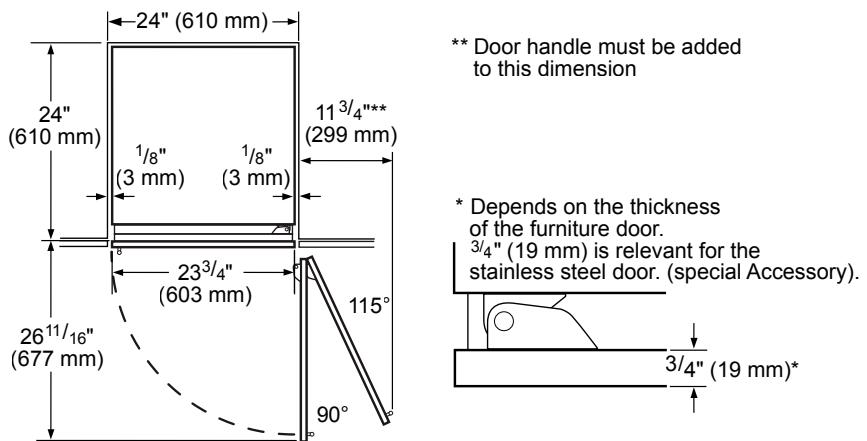

PANEL DIMENSIONS

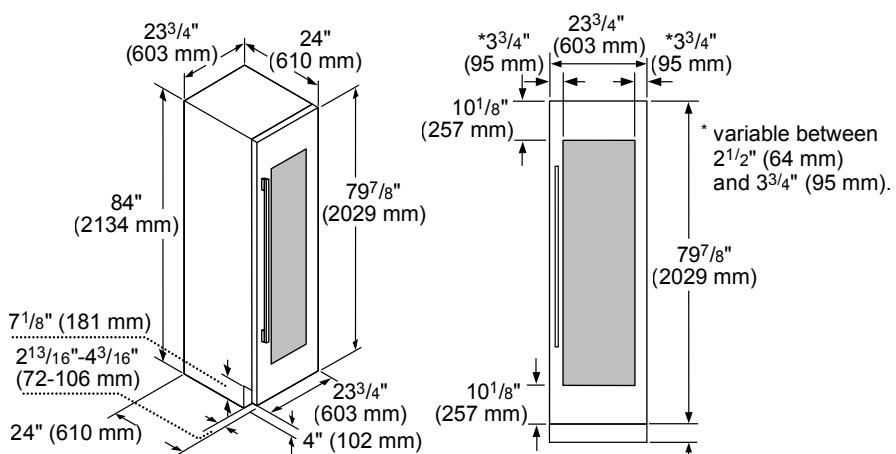


FREEDOM® COLLECTION

INSTALLATION


30-INCH CUSTOM 2-DOOR BOTTOM FREEZER

T30IB900SP


CUTOUT DIMENSIONS

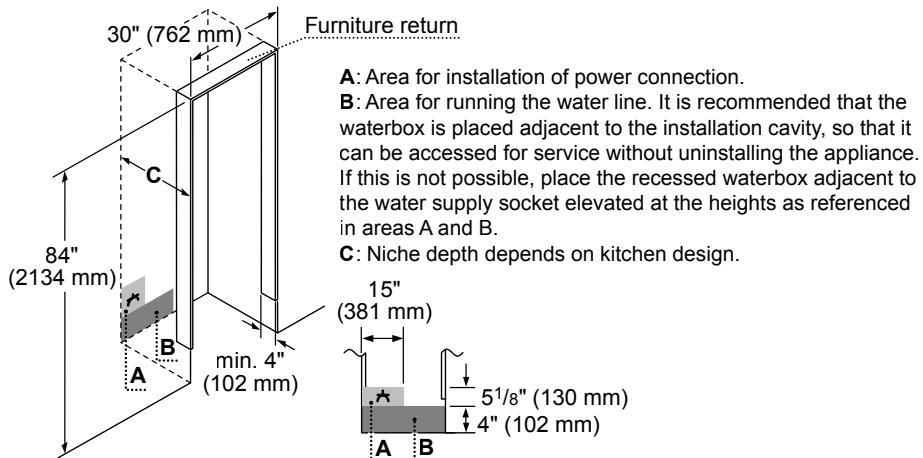

TOP VIEW CLEARANCE

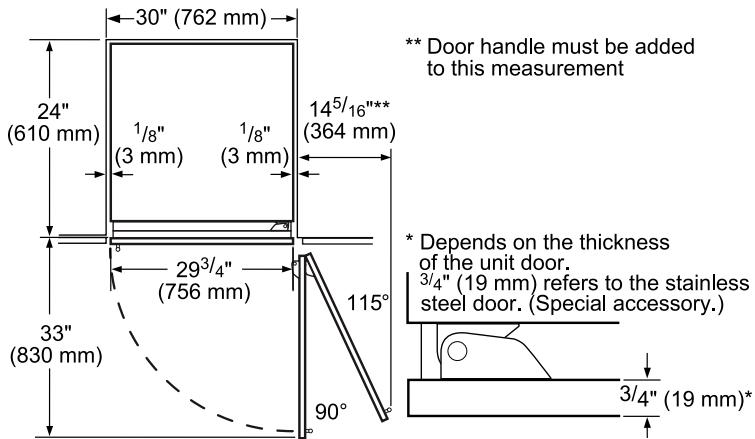

PANEL DIMENSIONS

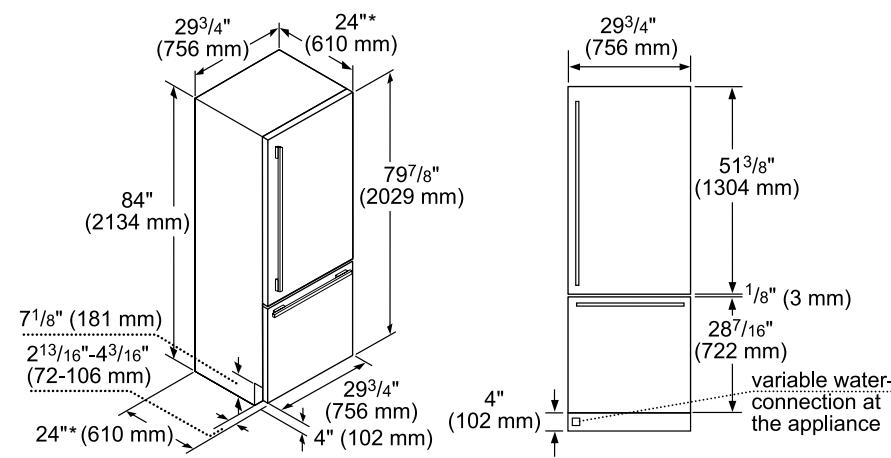


*Excludes thickness of door panel. If standard panel with 3/4" thickness is mounted, total depth is 24 3/4".

FREEDOM® COLLECTION


INSTALLATION

36-INCH CUSTOM 2-DOOR BOTTOM FREEZER T36IB900SP


CUTOUT DIMENSIONS

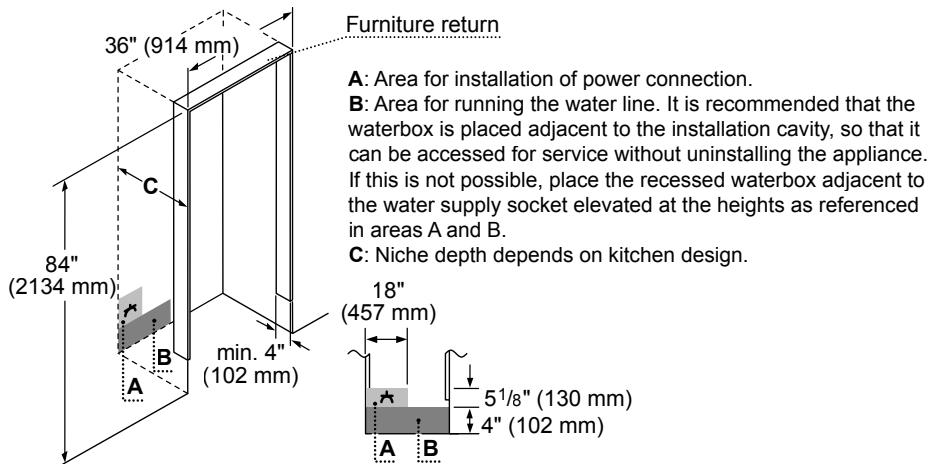

TOP VIEW CLEARANCE

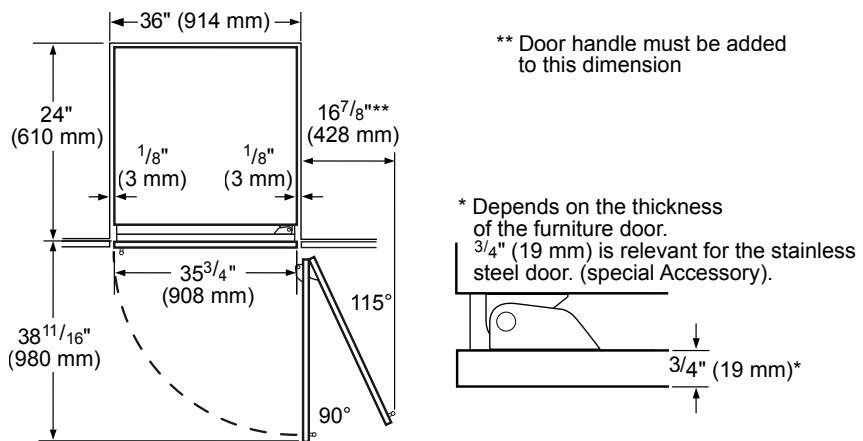

PANEL DIMENSIONS

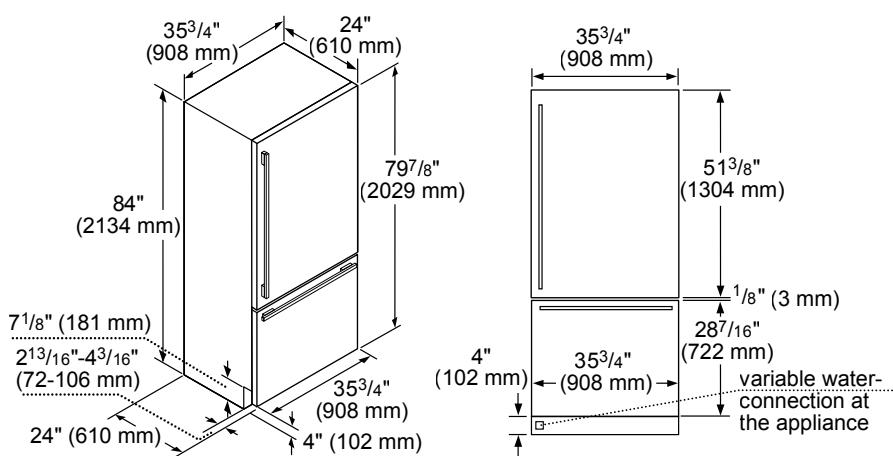


FREEDOM® COLLECTION


INSTALLATION

36-INCH CUSTOM FRENCH DOOR BOTTOM FREEZER T36IT900NP


CUTOUT DIMENSIONS

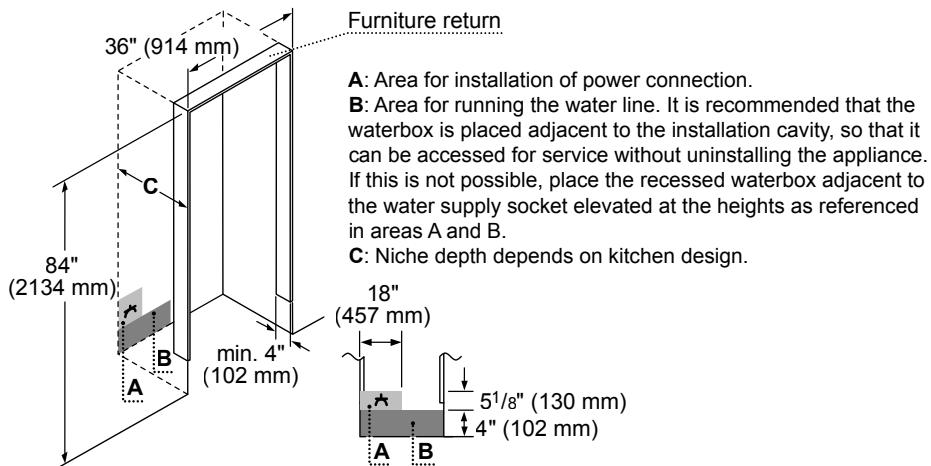

TOP VIEW CLEARANCE

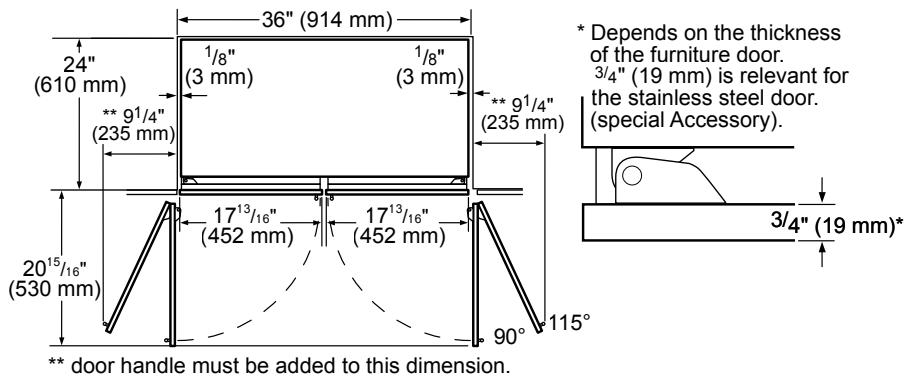


PANEL DIMENSIONS

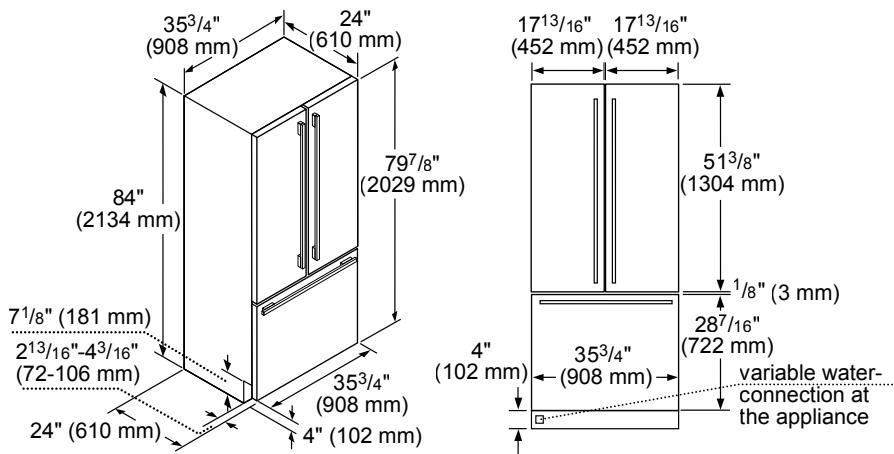


FREEDOM® COLLECTION
INSTALLATION30-INCH PRE-ASSEMBLED 2-DOOR BOTTOM FREEZER
T30BB920SS / T30BB910SS


CUTOUT DIMENSIONS

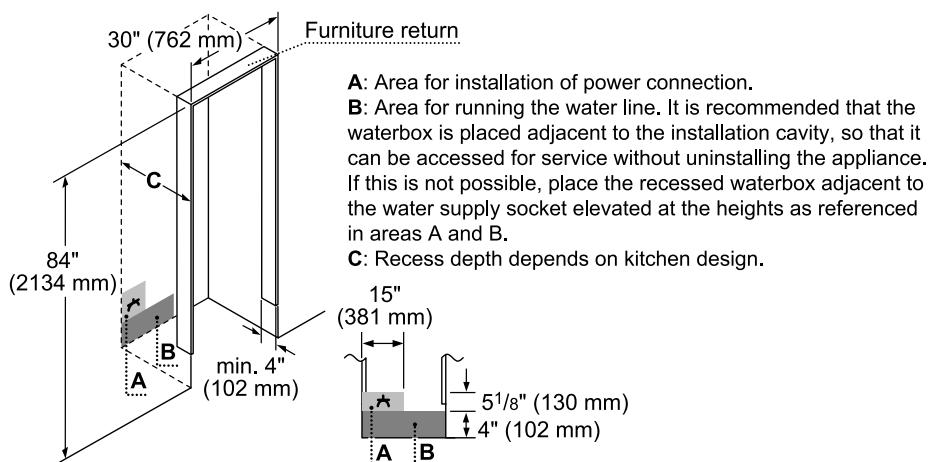

TOP VIEW CLEARANCE

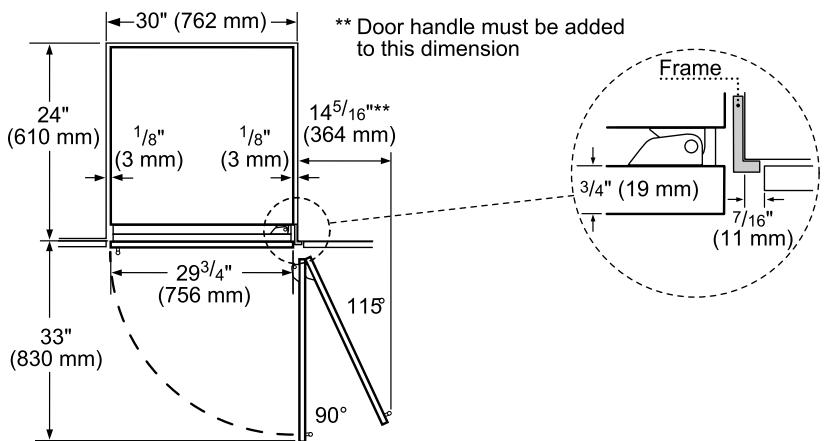

PANEL DIMENSIONS

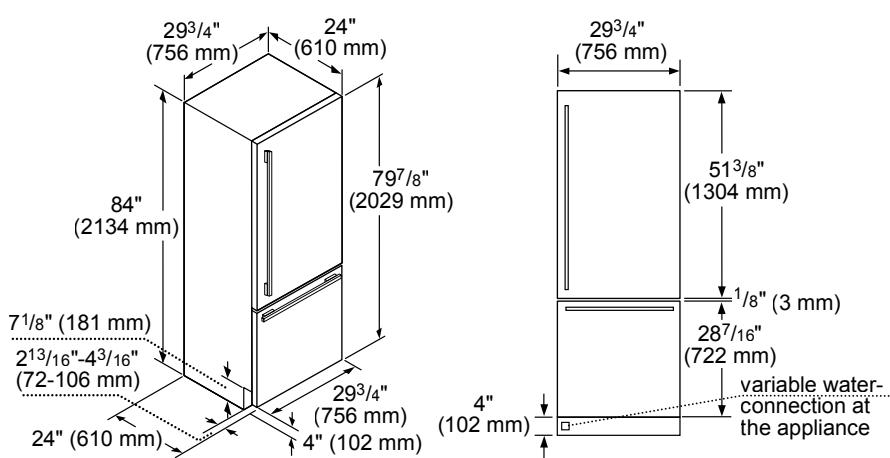


FREEDOM® COLLECTION


INSTALLATION

36-INCH PRE-ASSEMBLED 2-DOOR BOTTOM FREEZER T36BB920SS / T36BB910SS


CUTOUT DIMENSIONS

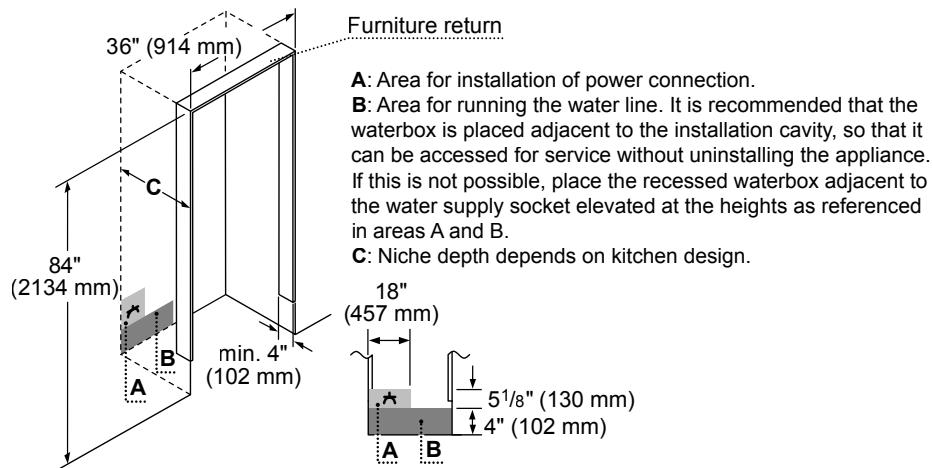

TOP VIEW CLEARANCE

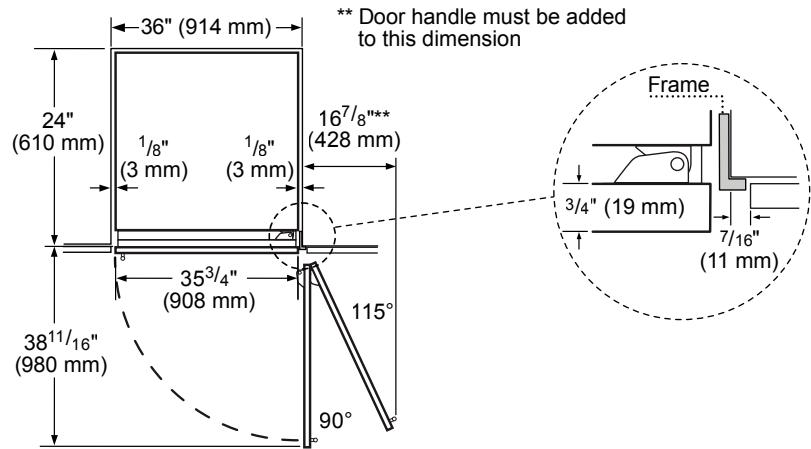

PANEL DIMENSIONS

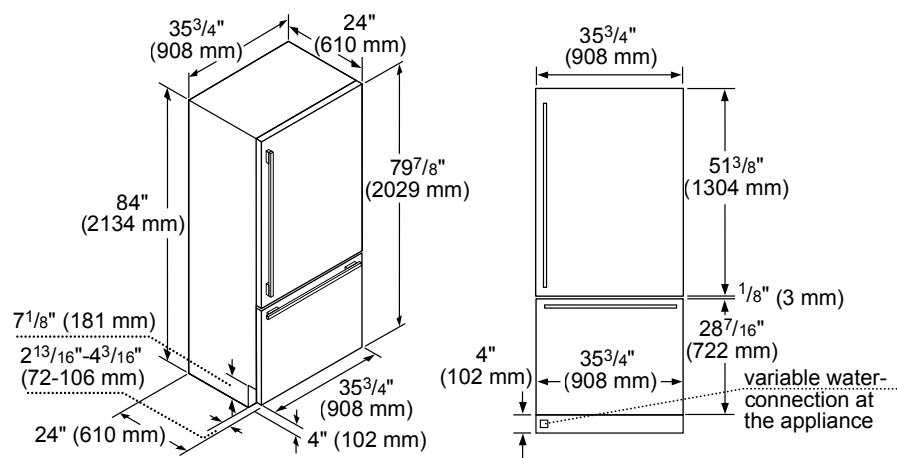


FREEDOM® COLLECTION


INSTALLATION

36-INCH PRE-ASSEMBLED FRENCH DOOR BOTTOM FREEZER T36BT920NS / T36BT910NS


CUTOUT DIMENSIONS

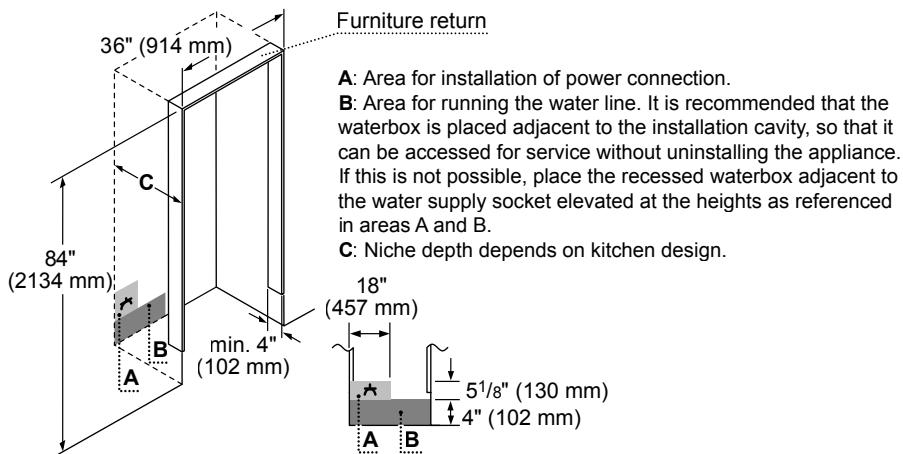

TOP VIEW CLEARANCE

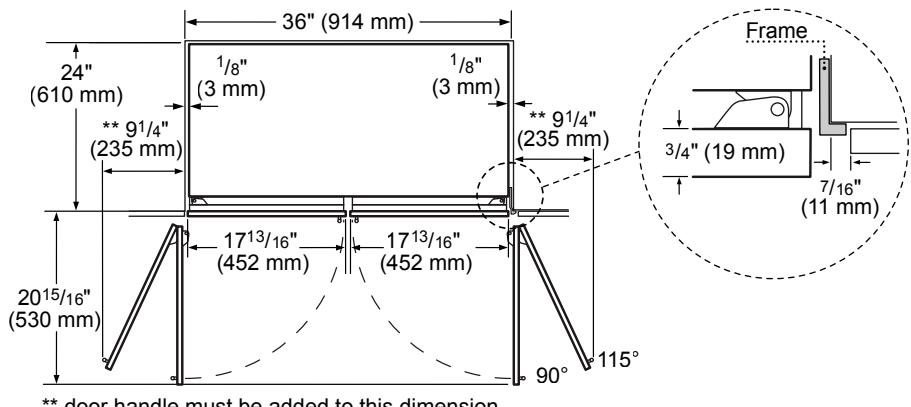

PANEL DIMENSIONS

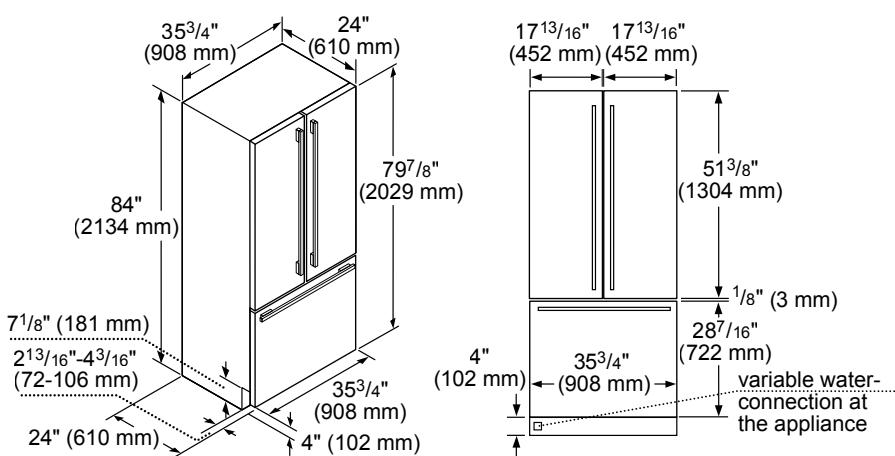

EXPERIENCE THERMADOR®

Thermador is committed to supporting you throughout all of your culinary endeavors. Whether you would like to research our products, learn more about the use and care of your appliances, or spice up your next dinner party with new and unique recipes, explore a world of resources at thermador.com.

Take Us With You

Visit the App Store or Google Play to download our apps, including the Thermador Kitchen Ideas & Lookbook and the Thermador Kitchen Design and Planning Guide.




Follow Us:

- [BLOG](http://thermador.com/blog)
- [f](https://www.facebook.com/thermador) @thermador
- [Instagram](https://www.instagram.com/thermadorhome) @thermadorhome
- [Twitter](https://www.twitter.com/thermador) @thermador
- [Pinterest](https://www.pinterest.com/thermador) @thermador
- [YouTube](https://www.youtube.com/thermadorhome) youtube.com/thermadorhome

Exceptional Customer Care 24/7

For dedicated customer service on any Thermador product: call 1-800-735-4328 or contact us at thermador.com.

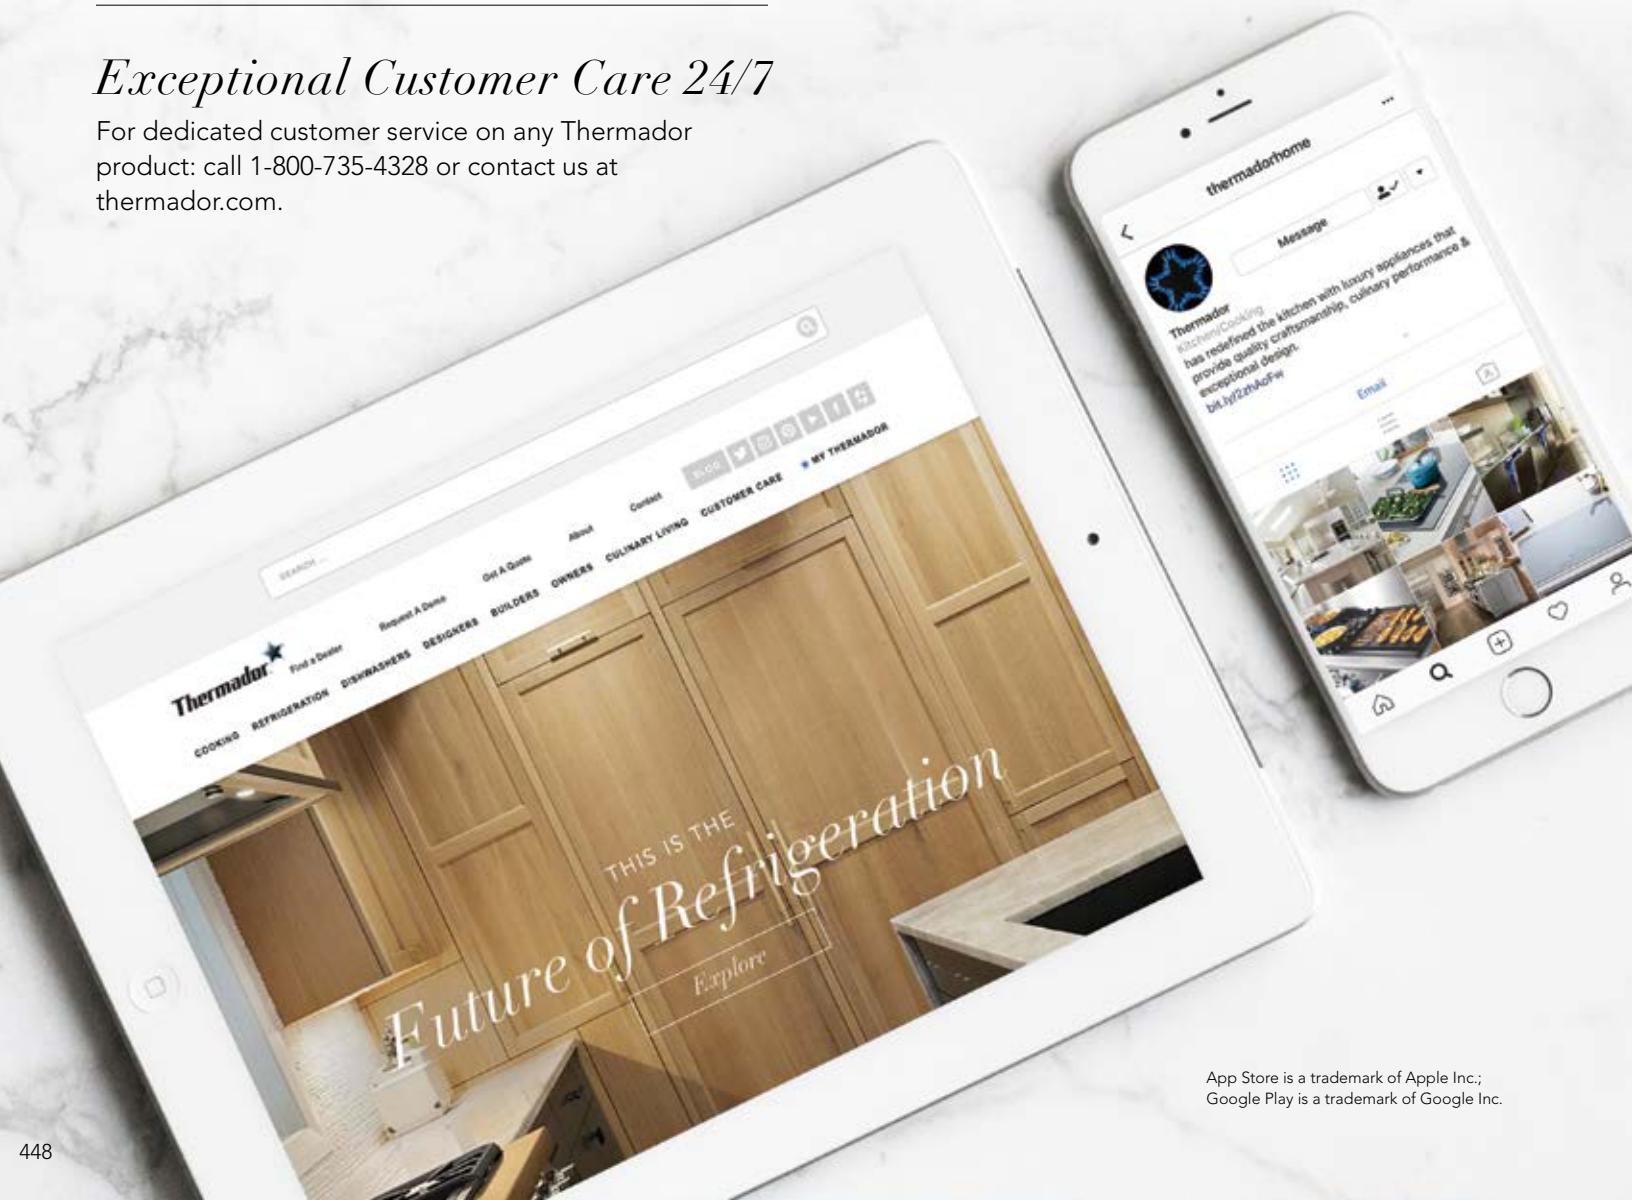

App Store is a trademark of Apple Inc.;
Google Play is a trademark of Google Inc.

PRODUCT WARRANTY

SUMMARY

PROFESSIONAL RANGES

Limited warranty, entire appliance, parts and labor (2 year)

PROFESSIONAL RANGETOPS

Limited warranty, entire appliance, parts and labor (2 year)

BUILT-IN OVENS

Limited warranty parts and labor (2 year)

INDUCTION COOKTOPS

Limited warranty, entire appliance, parts and labor (2 year)

GAS COOKTOPS

Limited warranty, entire appliance, parts and labor (2 year)

ELECTRIC COOKTOPS

Limited warranty, entire appliance, parts and labor (2 year)

VENTILATION

Limited warranty, entire appliance, parts and labor (2 year)

WARMING DRAWERS

Limited warranty, entire appliance, parts and labor (2 year)

BUILT-IN MICROWAVES

Limited warranty, entire appliance, parts and labor (2 year)

REFRIGERATION

Limited two-year warranty, entire appliance, parts and labor on any part of the refrigerator that fails because of a manufacturing defect

Limited warranty for sealed refrigeration system*; parts and labor (3rd to 6th year)

Limited warranty for sealed refrigeration system*; parts only (7th to 12th year)

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer,strainer and connection tubing

DISHWASHERS

Limited warranty, entire appliance, parts and labor (2 year)

Limited warranty for microprocessor or printed circuit board; parts only (3rd to 5th year)

Limited warranty for racks (does not include rack components); parts only (3rd to 5th year)

Limited warranty for rust-through on inner tub liner; parts only (Lifetime)

BUILT-IN COFFEE MACHINES

Limited warranty, entire appliance, parts and labor (2 year)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited Warranty from Date of Purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

2-YEAR WARRANTY
Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador® indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

©2017 BSH Home Appliances Corporation.



1 800 735 4328

USA THERMADOR.COM
CANADA THERMADOR.CA

©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.
digital ebook-11/17