

User Manual

For Fleet Series

FleetLink Flex

3150 Premier Drive, Suite 130,
Irving, TX 75063
(972) 870-5666
support@hiboost.com
www.hiboost.com





CONTENTS

| | |
|------------------------------------|----|
| Package Content | 01 |
| Introduction | 02 |
| App Introduction | 03 |
| How HiBoost Booster Works | 04 |
| App Assisted Installation | 06 |
| Installation Guide | 10 |
| Troubleshooting Guide | 14 |
| Technical Specifications | 15 |
| FCC and IC Statements | 16 |
| Return and Warranty Policies | 18 |

Package Content

FleetLink Flex



Booster



NMO Antenna




Magnetic cable



Inside Panel Antenna



Power Supply

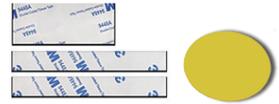

Other Accessories
to fix the booster and antenna

Note: Available accessories can be purchased through HiBoost.com

Warning: Un-authorized antennas, cables, and/or coupling devices are prohibited by new FCC rules, Please contact FCC for details: 1(888)-CALL-FCC.

Introduction

Thanks again for purchasing HiBoost cell phone booster. The HiBoost Fleet Series is a collection of precision-engineered products that improve cellular reception inside of vehicles by amplifying incoming and outgoing cell phone signals.

HiBoost cell booster's exclusive cloud-based Signal Supervisor mobile application and LED indicator allows users to monitor the live status of HiBoost cell phone signal boosters directly from the LED indicator or remotely from a mobile device anywhere at any time.

If there are any issues while installing a HiBoost cell phone signal booster, please contact the HiBoost technical support team through the following options:



Create a ticket or chat via SignalSupervisor app

 (972) 870-5666 (M-F from 9 am – 5 pm CST)

 support@hiboost.com

 www.hiboost.com

App Introduction

The SignalSupervisor app enables users to view supported frequency bands and their amplified power data (gain), ensuring optimal booster configuration. It also offers installation assistance for quick and accurate setup of the signal booster.



1.1 App Functions

-  Remote Monitoring: View device status in real-time and remotely switch frequency
-  Documentation Access: Access product specifications and installation videos for corresponding products (excluding industrial products).
-  Online Technical Support: Seek technical assistance from customer service via work orders or online chat.
-  Community Interaction: Share user experiences, post product reviews, and engage in interest group discussions.
-  Installation Assistance: Maximize device effectiveness by adjusting indoor and outdoor antennas based on output power changes.

1.2 Device Details

On the device details page of the app, users can view the supported frequency bands, gain, output power parameters, and check the device's usage status.



Note: The SignalSupervisor app strictly protects user privacy and does not collect any personal information. It is solely used for viewing device status, assisting with installation, and obtaining technical support, without accessing any personal information from users, ensuring the security and confidentiality of user data.

Gain: Refers to the degree to which the device amplifies the signal. The higher the gain, the better the signal transmission distance and quality.

Output Power: Refers to the size of the signal coverage area. The higher the output power, the greater the coverage area and signal strength.

LTE700: This refers to the frequency band used by the repeater station. For more details, please refer to the table on page 8.


Coverage Performance: In the app, "Super" indicates that the current repeater station's coverage performance is satisfactory, with a strong and stable signal; "Good" indicates that the coverage performance is somewhat lacking and may require adjustment or optimization to improve signal quality.

How HiBoost Booster Works

General Working Principle:

Before we start any of the two ways, please allow us to spend 2 pages to make you understand how the vehicle booster system works for you.

※ Please do spend sometime to read it fully, as it is crucial to get the best performance.

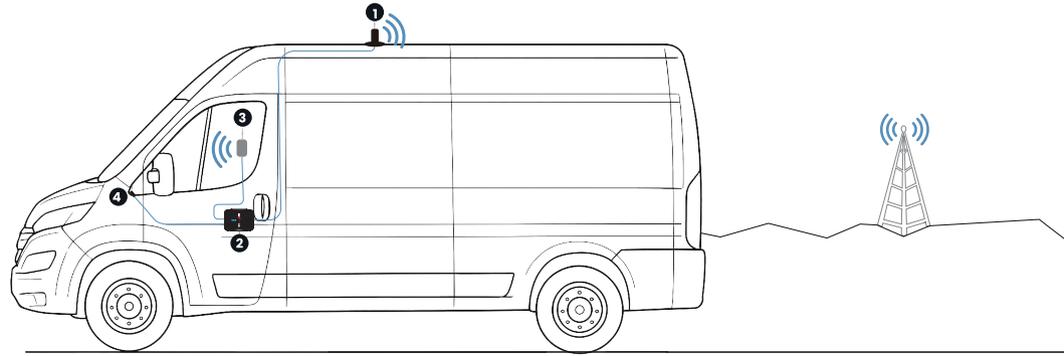

Vice versa, inside antenna receives phone signal and sends to the booster,
The booster then amplifies and sends it to outside antenna,
Outside antenna sends signal to the cell tower.
Then you can make phone calls and do internet streaming.

More notes on how to keep the maximum booster gain

The principle is that we need to avoid the self-oscillation between outside and inside antennas as it reduces the gain.

Measures can be taken to avoid the self-oscillation:

- 1) Increase the distance between outside and inside antennas, generally the same vertical distance generates more loss than horizontal distance.
- 2) Use barriers between outside and inside antennas.


Here are some good and bad solutions for your reference.

※ Please note: This separation is not an absolute mandate. The idea is to isolate the outdoor antenna from the indoor antenna.




Perfect

1. Outside antenna located at highest position.
2. Enough vertical and horizontal distance between outside and inside antennas.
3. Inside antenna is close to demanded coverage area.

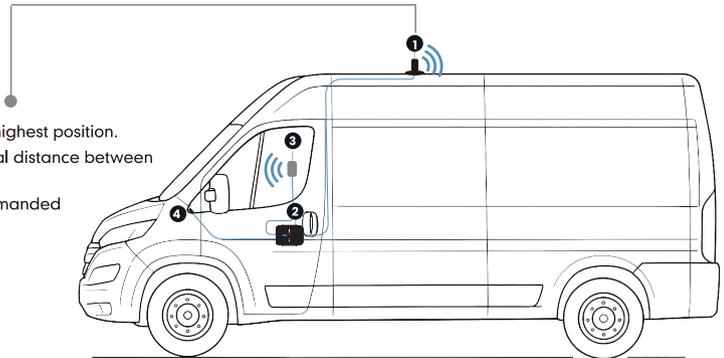

Poor

1. Not enough horizontal and vertical distance between outside and inside antennas.

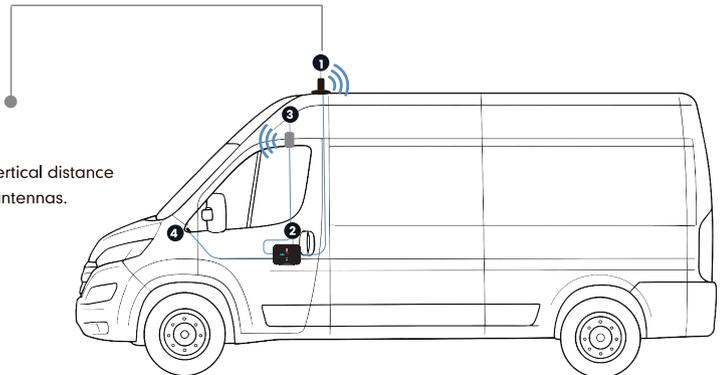

App Assisted Installation

Flow Chart of App Assisted Installation



Signal Detection Before Installation

Third-party App

You can use third-party software to check the signal strength, supported frequency bands, and other relevant information in your location, helping to confirm whether the environment is suitable and if the signal repeater can be used effectively.



Network Cell Info Lite

Note: Only supported for Android



OpenSignal

Note: Support for Android and iPhone

Testing Methods of Frequency Band



For iPhone

1. Dial *3001#12345#* then press call button
2. Choose All Metrics, Click Serving Cell Info
3. Check Band Info



For Android phone

1. Download "Network Cell Info Lite"
2. Choose "GAUGE"
3. Check "BAND"



Bands contained in the Gauges on SignalSupervisor

| Gauge | Band | Uplink | Downlink |
|---------|-------|--------------|--------------|
| LTE700 | 12/17 | 698–716MHz | 728–746MHz |
| | 13 | 776–787MHz | 746–757MHz |
| CELL800 | 5 | 824–849MHz | 869–894MHz |
| PCS1900 | 25/2 | 1850–1915MHz | 1930–1995MHz |
| AWS2100 | 4 | 1710–1755MHz | 2110–2155MHz |

Please focus on the gauge that contains the band you are using.

Step 1: Download Your Preferred Third-party App

Using a third-party app allows us to:

- Find a suitable site to install the booster
- Test the signal strength and quality

There are a variety of resources available online: Opensignal, Cell mapper, Network cell info lite, etc.

Please download them beforehand over Android and / or iOS:



You can use whichever third-party app that you prefer. Please download the app of your choice before installing the booster. In the following instructions, we will show examples of how using the Network Cell Info Lite app will help with proper installation of the booster.

Step 2: Select the installation site

Drive to an area with an outside signal below -85dBm.

The Network Cell Info Lite app will show you your signal as you move around, enabling you to find this area.

Reasons why a signal strength of less than -85dBm is required:

- 1) The correct outside signal will create a clean environment for installing the booster and allow for adjustments that will result in the maximum gain. For example, an outside signal that is too strong (ex. -40dBm) will reduce the working gain.
- 2) An area with the correct signal allows the user to test the performance after the booster has been installed.



" Network Cell Info Lite " allows users to measure the signal strength before and after installation, as it shows signal levels. Unfortunately, it is only available for Android devices.



Network Cell Info Lite



The signal strength requested by the booster system is as below.

| SIGNAL STRENGTH | EXCELLENT | GOOD | FAIR | POOR | DEAD ZONE |
|-----------------|-----------|----------------|-----------------|-----------------|-----------|
| 3G/1X | -70dBm | -70 to -85dBm | -86 to -100dBm | -101 to -109dBm | -101dBm |
| 4G/LTE | -90dBm | -90 to -105dBm | -106 to -110dBm | -111 to -119dBm | -120dBm |




Signal strength doesn't affect whether you can make a phone call or not. However, improved signal strength will affect the quality of the phone call, enabling users to hear each other clearly.



The reason to test your internet speed is to make sure you'll be able to stream high-bandwidth movies, like those from Netflix, Hulu, Amazon, and other providers. If your internet speed is too slow, you'll get choppy video or regular buffering.

Step 1 Assemble and Mount the Outside Antenna

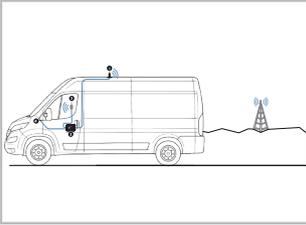

1.1 Determine where you would like to set up the outside antenna

Usually, the outside antenna is mounted to the roof of the car near the back.

Note: Please make sure the outside antenna is not placed on the glass. If you cannot make it, please keep the outside antenna as close to the back as possible.



1.2 Fix the outside antenna

The antenna has a built-in magnet. You can fix it directly on the metal roof.



1.3 Routing the Outside Cable

Once the antenna position has been determined, guide the cable through the entry point into the vehicle interior.

Step 2 Connect the Outside Antenna to the Booster



After routing the cable, connect it to the booster.

Step 3 Connect the Power Supply to the Booster



Step 4 Download the Signal Supervisor App, register ID and booster.



Register an ID first and log in.
Add the booster to the device list.

Step 5 Place Inside Antenna & Connect the Cable.



Place the inside antenna where you would like to cover signal and connect it to the booster.



Use the Signal Supervisor to help installation

The booster will work at best if the gain reaches **50dB**. But if you can't get so, at least ensure the gain on the gauges reaches **46~50dB**. If not, please kindly adjust the position of the inside antenna.

Step 6 Fix the Inside Antenna and the Booster.



Fix the inside antenna with the provided double-side tape.




Fix the booster with the provided Hook & Loop.

Signal Detection After Installation

Step 1: Signal quality test

After reaching the MAX possible gain (50dB or as close to 50dB as possible), attach the outside & inside antennas, then use your device to test phone call and web browsing capabilities with the third-party app Network Cell Info Lite or OpenSignal.

*Notes Again: Just remember that strength and quality are two separate issues. A poor quality “strong” signal can be next to useless, but a clean signal of two bars might be all your device needs.

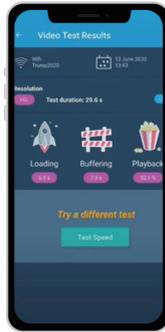

If the signal quality not ideal, adjust the position of inside or outside antennas, and in the meantime ensure that the gain remains as high as possible.

When it reaches the ideal test value, the booster, antenna and cable can be firmly installed.

The installation order is: Outside antenna – Inside antenna – Booster.

Note: Please don't expect the vehicle booster system to be at ideal signal strength in all areas. The booster gain is limited to 50 dB by the FCC. In addition, the outside signal is changing at all times while driving, affecting booster gain.

Step 2: Drive the vehicle to other places to see how it works

Drive the vehicle to various weak areas to test the performance.

Drive the vehicle to various strong areas to test the performance.

Additional Tips

If you travel to an area where the signal is particularly weak and the device cannot be used, press the inside antenna against the back of the device. This may allow a signal to be obtained. This is not a normal way to use the booster, but it can help you maintain communication in areas with exceptionally weak signals.

However, this will not help if there is no signal present, or if the signal is extremely weak. The booster must have a signal to boost.



Troubleshooting Guide

LED STATUS INDICATORS

| | | |
|----------------|--------------------|-----------------------------|
| Alarm(ISO) LED | Solid blue | Normal |
| | 1s flashing blue | Slight self-oscillation |
| | 0.5s flashing blue | Self-oscillation |
| | Solid red | Input voltage is not enough |
| Bluetooth LED | Solid blue | Bluetooth disconnected |
| | 1s flashing blue | Bluetooth connected |
| Wi-Fi LED | Solid blue | Wifi disconnected |
| | 1s flashing blue | Wifi connected |

| Common Issues | Troubleshooting Instructions |
|--|---|
| The vehicle booster is installed but there's still no signal | Check to see if the vehicle is started. Double check connections to make sure none are loose. |
| The signal is not stable after turning on the booster power | Check that the outside signal is stable by referring to your mobile device and checking your coverage. |
| The Alarm LED is quick flashing blue or red | Check to make sure vehicle is not parked too close to a cell tower.Ensure indoor and outdoor antenna isolation. |
| The Alarm LED is solid red | Input voltage is too low($\leq 10V$)/too high($16V\sim 20V$) |
| There is No Power | Check that the booster is turned on and the DC power outlet is plugged into the DC 12V port or lighter adapter. |

If there are any issues while installing a HiBoost cell phone signal booster, please contact the technical support team through the following channels:



Create a ticket or chat via SignalSupervisor app

 (972) 870-5666 (M-F from 9 am – 5 pm CST)

 support@hiboost.com

 www.hiboost.com

Technical Specifications

| RF Parameter | | Uplink | Downlink |
|------------------------|----------|-------------------------------------|--------------|
| Frequency Range | LTE(A+B) | 698-716MHz | 728-746MHz |
| | LTE(C) | 776-787MHz | 746-757MHz |
| | CDMA | 824-849MHz | 869-894MHz |
| | PCS | 1850-1915MHz | 1930-1995MHz |
| | AWS | 1710-1755MHz | 2110-2155MHz |
| Max. Gain | | | 50dB |
| Max. Power | | UL 24 dBm | DL 0 dBm |
| Electrical Parameter | | | |
| Power Supply | | Input DC12-24V, Output DC12V-24V/3A | |
| Input Impedance | | 50 ohms | |
| Mechanical Parameter | | | |
| I/O Port Type | | SMA-F & RPSMA-M | |
| Environment Parameter | | | |
| Operating Temperature | | -10°C~+55°C | |
| Storage Temperature | | -10°C~+80°C | |
| Environment Conditions | | IP40 | |

FCC and IC Statements

FCC RF EXPOSURE STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instruction for satisfying RF exposure compliance. This transmitter must not be colocated or operating in conjunction with any other antenna or transmitter.

IC RF EXPOSURE STATEMENT

The device is in compliance with RF exposure limits. The minimum distance from body to use the device is 20 CM.

Le présent appareil est conforme aux normes de conformité ou aux limites d'intensité de champ RF. La distance minimale du corps à utiliser le dispositif est de 20 CM.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by HiBoost could void the user's authority to operate the equipment. For a complete list of antennas and cables approved for use with these boosters see Authorized Kitting Options

FCC 27.50(d)(4) Statement: Fixed, mobile, and portable (handheld) stations operating in the 1710-1755 MHz band are limited to 1-watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground.

FURTHER INFORMATION ON SIGNAL BOOSTER END-USE REGISTRATION

The following links are the currently active contacts for booster registration with U.S. wireless providers:

<https://www.uscellular.com/uscellular/support/fcc-booster-registration.jsp>

https://www.sprint.com/legal/fcc_boosters.html

<https://www.verizonwireless.com/solutions-and-services/accessories/register-signal-booster/> <https://support.t-mobile.com/docs/DOC-9827>

<https://securec45.securewebsession.com/attsignalbooster.com/>

IC Statement: This device complies with Innovation, Science and Economic Development Canada ICES-003 Compliance Label: CAN ICES-3 (B)/NMB-3(B). Le présent appareil est conforme Innovation, science et développement économique Canada ICES-003 Étiquette de conformité: CAN ICES-3 (B) / NMB-3 (B).

This is a CONSUMER device.

BEFORE USE, you MUST REGISTER THIS DEVICE with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You MUST operate this device with approved antennas and cables as specified by the manufacturer. Antennas MUST be installed least 20 cm (8 inches) from (i. e..MUST NOT be installed within 20 cm of) any person.

You MUST cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

Return and Warranty Policies

30-Day Money-Back Guarantee: If for any reason the performance of any product is not acceptable, the product may be returned to the reseller within 30-days with proof of purchase. Please contact the customer support team.

3-Year Warranty: Signal boosters and kits are warranted for 3 years. We will repair or replace the unit and will cover the cost of delivery back to consumers located within the continental US and Canada. We will only cover shipping to our office if the booster was delivered to you recently, and was delivered defective. Damage caused by the use of non-company power supplies or other accessories is not covered under warranty.

Customers can choose to return the signal boosters and kits directly to the manufacturer at the purchaser's expense with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by us. RMA numbers may be obtained by contacting customer support at 972-870- 5666 or support@hiboost.com

This warranty does not apply to any signal boosters or kits determined by us to have been subjected to tampering, misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

We are not liable for any Signal Supervisor application network connectivity issues. The cell phone signal booster relies on a strong, continuous and reliable connection to the internet in order to communicate with the cell phone application. For all Signal Supervisor Application related issues, please check your network strength and call our technical support.

Failure to use a surge-protected AC power strip with at least a 1000 Joule rating will void your warranty. Damage caused by lightning is not covered by this warranty.

All of the products that are packaged with other accessory products are intended for resale and used as a single integrated system. Such product kits are required to be sold to the end-users or subsequent reseller as packaged.



