

1224FZR • 24" Convertible Freezer • 1000 Series

FEATURES & BENEFITS



STAINLESS SOLID



INTEGRATED SOLID



BLACK SOLID



WHITE SOLID

PERFORMANCE	<ul style="list-style-type: none"> • Volume of 4.8 cu ft • Digital Touch Pad Control is conveniently located on upper face of unit • Converts to a refrigerator with the touch of a button • Freezer temperature range: -5°F - 5°F • Refrigerator temperature range: 34°F - 45°F • Convection cooling system rapidly and efficiently takes items to the set temperature • Wi-Fi ready - Compatible with U-Line U-Connect iOS and Android app
INTERIOR/EXTERIOR	<ul style="list-style-type: none"> • White interior is illuminated with LED lighting • Three chrome plated full-extension slide-out freezer baskets • Standard commercial stainless steel handle is interchangeable with professional handle accessory • Door swing is field reversible, and is shipped right-hand hinged
INTEGRATION	<ul style="list-style-type: none"> • Unit is designed to be built-in or can be freestanding with the freestanding accessory kit • Integrated model requires 3/4" custom door panel (panels not supplied by U-Line) • Four independently adjustable leveling legs provide a precise undercounter fit • Available in the following finishes: Stainless, Integrated, Black, or White

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-1224FZRS-00A	115 / 60	Field Reversible	Stainless Solid	125 lbs
U-1224FZRINT-00A	115 / 60	Field Reversible	Integrated Solid	122 lbs
U-1224FZRB-00A	115 / 60	Field Reversible	Black Solid	125 lbs
U-1224FZRW-00A	115 / 60	Field Reversible	White Solid	125 lbs


ACCESSORIES

Model	Description	Finish	Shipping Weight
80-54247-00	Professional Door Handle, 1 1/4" Diameter	Stainless	2 lb
U-FSK-B	Freestanding Kit	Black	3 lb


1000 Series • 24" Convertible Freezer • **1224FZR**

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

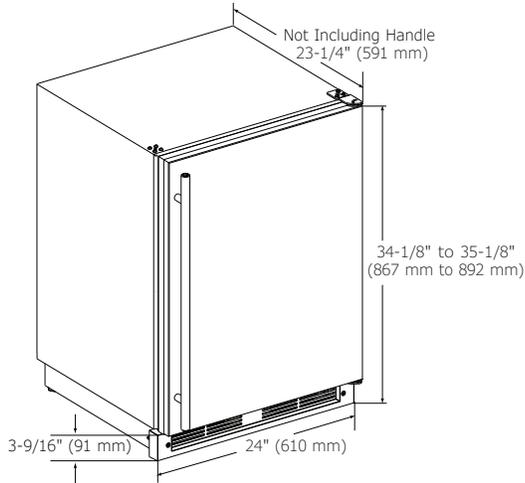

CABINET CUT-OUT

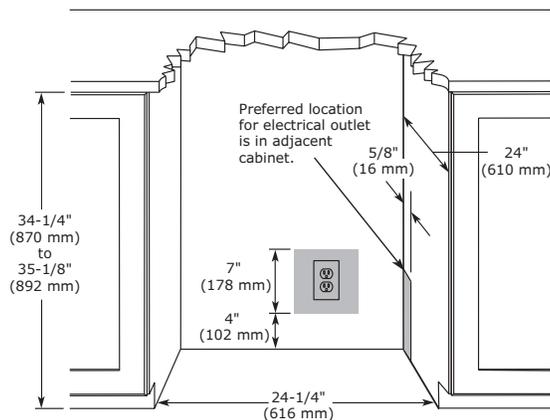


INSTALLATION NOTES

- When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.
- Cutout includes the additional 1/4" width overall to ensure proper installation.
- No additional clearance around sides, top or rear of unit is needed for ventilation.
- Do not obstruct front grille air flow.

SPECIFICATIONS

Model	1224FZR
Amps: Running	2.5
Capacity: Volume (cu ft)	4.8
Control Type	Digital Touch Pad
Dimensions: Product Depth	23 1/4" / 591 mm
Dimensions: Product Height	34 1/8" / 867 mm
Dimensions: Product Width	24" / 610 mm
Energy Consumption: Avg. Per Year	390 kWh
ENERGY STAR	ENERGY STAR / Tier 1
Panel Height	30 1/4" / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	Solid Panel
Panel Width	23 3/4" / 603 mm
Product Weight: Max	115 lbs
Refrigerant Type	R134a
Sabbath (Star K Certified)	Yes
Temperature Range (Freezer)	-5°F - 5°F
Temperature Range (Refrigerator)	34°F - 45°F
Wi-Fi Capable	Yes (Production Beginning January 2017)

COOLING SYSTEM

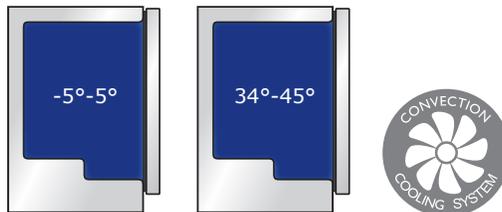

ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

