

# CR123A LITHIUM MANGANESE DIOXIDE




### Features & Benefits

- Operating temperature range between  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability


### Specifications

Nominal Capacity:	1550 mAh
Nominal Voltage:	3V
Weight:	Approximately 17g
Operating Temperature:	$-40^{\circ}\text{C}$ - $+70^{\circ}\text{C}$

### Dimensions

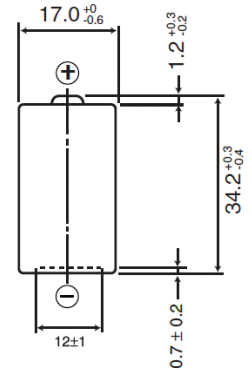


### Temperature Characteristics

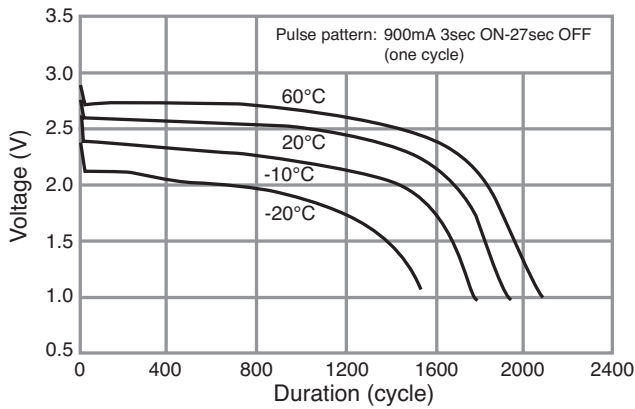


\*Please consult Panasonic for use below and above  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$


### Continuous Discharge Characteristics (60°C)

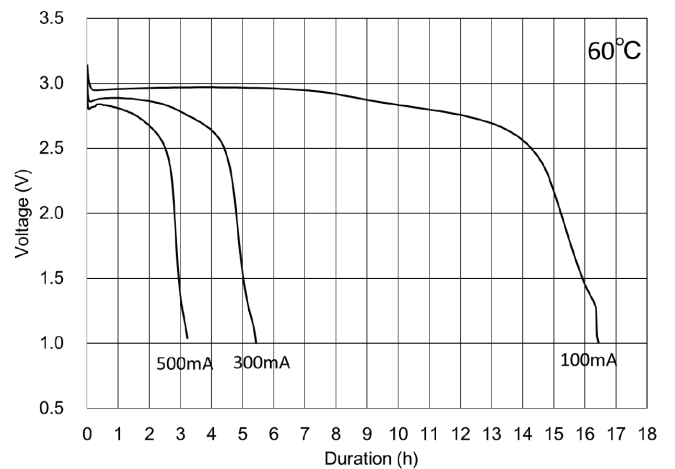

### Continuous Discharge Characteristics (20°C)

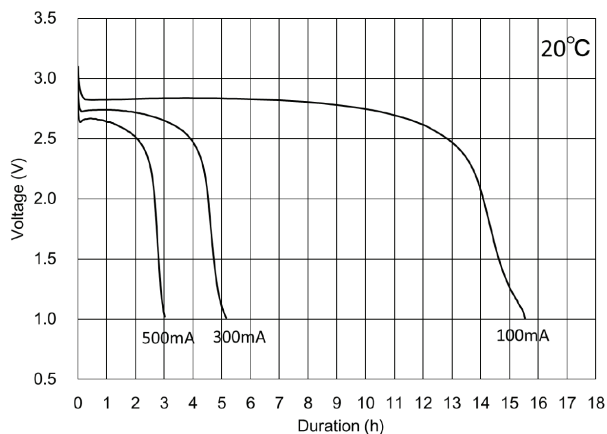

### Continuous Discharge Characteristics (-20°C)

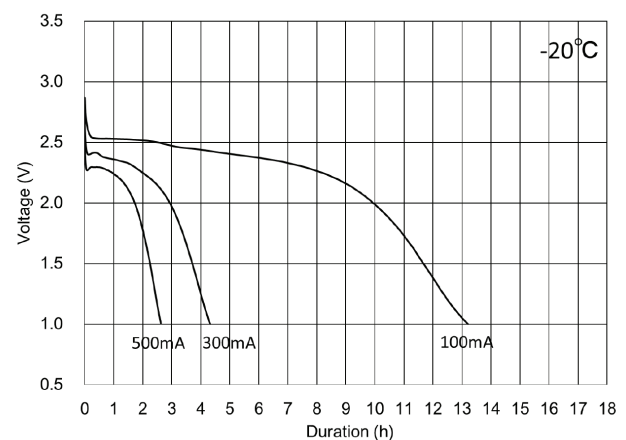

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit [www.na.industrial.panasonic.com/products/batteries](http://www.na.industrial.panasonic.com/products/batteries) or e-mail [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com).

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.