

P330

4K PoE Security Camera with Smart Detection



White



Black



Smart Detection

Differentiate people, vehicles, and animals from other trivial things.



Accurate Alerts

Receive instant alerts once something suspicious is happening.

4K

4K UHD

Deliver 4K sharp images day and night with rich details.



Color Night Vision

See through the night in full color with its spotlight on.



Time Lapse

View long-time processes such as sunrise in a short video.



Power over Ethernet

Transmit data and power with only one Ethernet cable.



Local Storage

Save your recordings to a micro SD card of up to 256GB.



IP67 Weatherproof

Performs well in any weather conditions with its rugged housing.



Remote Access

Live view your footage anytime anywhere via Reolink App/Client.




True-to-Life Images in 4K

Capture super sharp 4K videos with mind-blowing details, day or night. Never miss anything important.




Focus on True Threats

Differentiate people, vehicles, and animals from other objects and send alerts straight to your phone, so nothing important goes unnoticed.

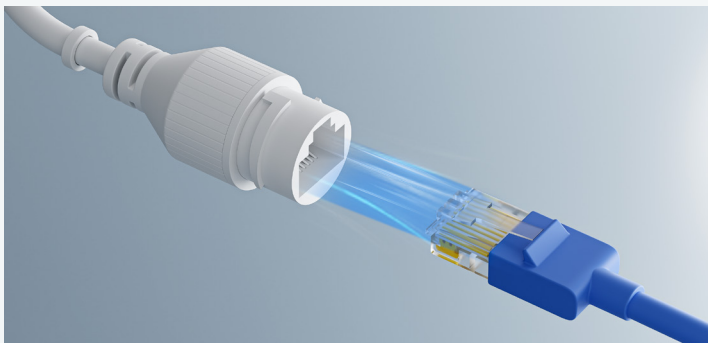


PoE, Setup in Minutes

Transmit videos and be charged simultaneously via only one network cable. Setup is easier with no messy cables.

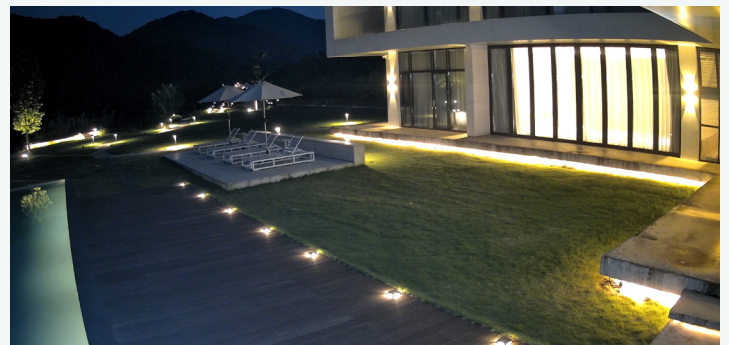

See Through the Night in Colors


Fuzzy and pixelated night vision is now history. The powerful spotlight that keeps on all night makes the night as colorful as day.

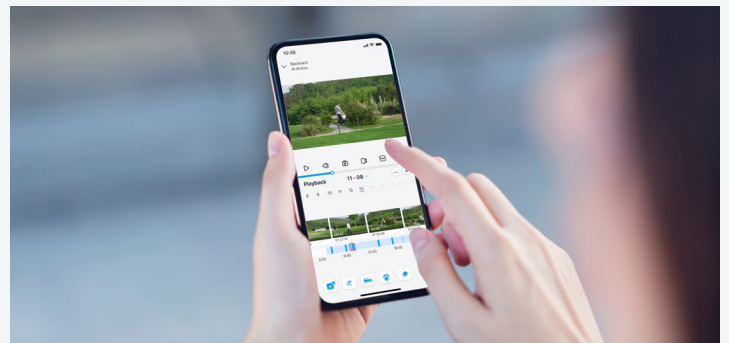

Your World at Your Fingertips

With a few clicks on Reolink App or Client, watch live feed, be informed of the emergency, replay key moments and more – from anywhere, anytime.

Gallery

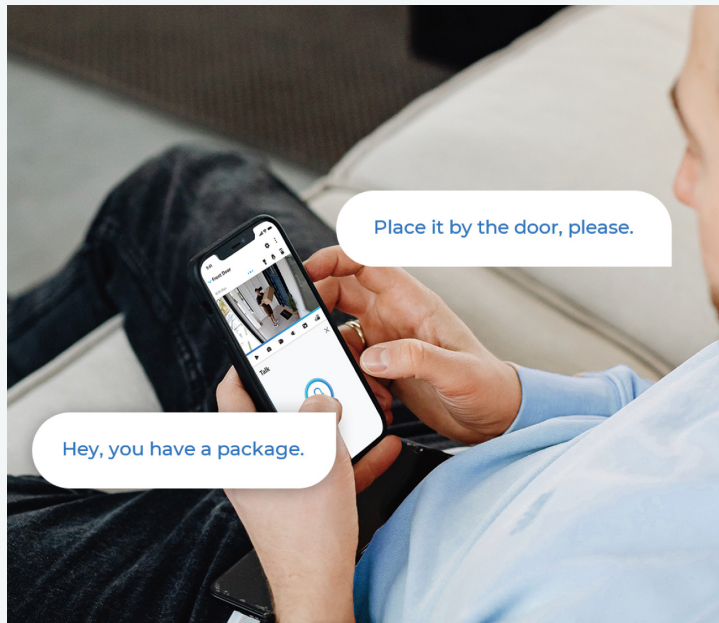

One App/Client for All Control

Stay connected to your home or business anytime, anywhere.



Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



| | | |
|----------------------------|-----------------------|---|
| Model | P330 | |
| Video & Audio | Image Sensor | 1/2.49" CMOS Sensor |
| | Video Resolution | 3840x2160 (8.0 Megapixels) at 25 frames/sec |
| | Lens | f=4.0mm fixed; F=2.0, with IR-cut filter |
| | Video Format | H.265 |
| | Field of View | Horizontal: 87° Vertical: 44° |
| | Day & Night | Auto-switching with IR-cut filter |
| | Infrared Night Vision | 30 meters (100ft) (LED: 18pcs/14mil/850nm) |
| | Color Night Vision | Spotlight: 1pcs |
| | Audio | Audio recording |
| Power | POE | IEEE 802.3af, 48V Active |
| | DC Power | DC 12.0V=1A, <12W |
| Interface | Power | DC power port |
| | System | Reset button |
| | Ethernet | One 10M/100Mbps; RJ45 |
| | Storage | microSD card slot (support up to 256GB) |
| | Audio | Built-in microphone |
| Software Features | Frame Rate | Mainstream: 2fps - 25fps (default: 25fps) Substream: 4fps - 15fps (default: 10fps) |
| | Code Rate | Mainstream: 4096Kbps - 8192Kbps (default: 6144Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps) |
| | Browser Supported | Edge, Chrome, Firefox, Safari |
| | OS Supported | PC: Windows, Mac OS; Smartphone: iOS, Android |
| | Smart Alarm | Motion detection; person detection; vehicle detection; animal detection |
| | Record Mode | Motion-triggered recording (default); scheduled recording; 24/7 recording |
| | Protocol & Standard | HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P |
| | Maximal User Access | 20 users (1 admin account & 19 user accounts); support up to 12 simultaneous video streams (10 substreams & 2 mainstreams) |
| | Smart Home | Google Assistant |
| Working Environment | Temperature | Operating temperature: -10°C - +55°C (14°F - 131°F) |
| | Humidity | Operating humidity: 10% ~ 90% |
| | Waterproof | IP67 |
| Size & Weight | Dimensions | 60 x 66 x 192mm |
| | Weight | 488g |
| Warranty | Limited Warranty | 2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ . |



- | | | |
|-------------|------------------------|-------------------|
| 1 Mount | 2 Metal Aluminum Case | 3 Daylight Sensor |
| 4 Spotlight | 5 High Definition Lens | 6 IR LEDs |



- | | | |
|------------------|----------------|-----------|
| 1 Power | 2 Reset Button | 3 Network |
| 4 Waterproof Lid | | |

Best Companion



PoE Injector



microSD Card



Reolink NVR




Ethernet Cable



Waterproof Lid



RLA-POECS1
(Combiner & Splitter)



Junction Box B10

Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>



Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>

NVS8

8-Channel PoE NVR for 24/7 Reliable Recording



8-Channel

The NVR can connect up to 8 Reolink PoE/WiFi cameras.



Built-in 2TB HDD

Store videos locally on a pre-installed 2TB HDD (upgradable to 12TB).



24/7 Recording

Continuous recordings directly to your hard drive with expandable storage.

16MP

Support up to 16MP

Record up to 16MP ultra-clear videos on every channel.



All-Around Protection

Stand guard over every inch of your property with up to 8 cameras.



Centralized Security

Take full control of all cameras with centralized NVR management.



PoE

The plug-and-play setup saves you time and effort.



Remote Access

Easily check live feeds from anywhere via the Reolink App/Client.



Local Access

Access the live feeds offline via a monitor or an HD TV.



Centralize Your Security

Connect your Reolink cameras to the NVR for centralized management, all-round surveillance, and more. Everything is under your control.



24/7 Continuous Recording

Save days of your 24/7 footage securely and locally on a 2TB HDD (upgradable to 12TB). Never worry about data loss.




Your Personalized Security Solution

The 8-Channel NVR is compatible with all our IP cameras - up to 16MP PoE/WiFi cameras. Have fun customizing your own security system.



PoE - Easy Setup

Simply connect your cameras to the NVR with a network cable for both data & power transmission. No messy cables, ideal for DIY lovers.

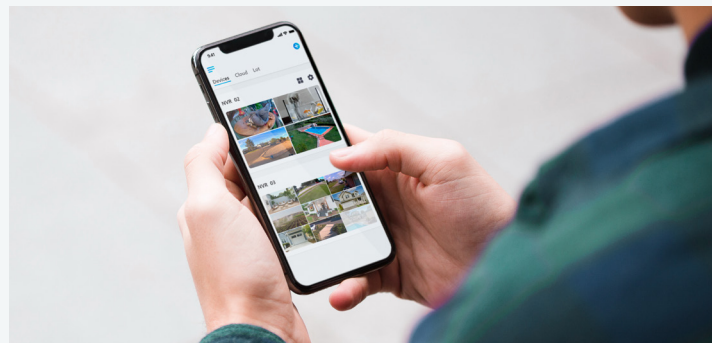

Local and Remote Access & Control

Access the live streams of all cameras anywhere with the Reolink App/Client, or connect the NVR to a monitor for local monitoring.

Gallery



One App/Client for All Control

Stay connected to your home or business anytime, anywhere.




Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.




| | | |
|---------------------------|--|---|
| Model | NVS8 | |
| Hardware | Hardware | N7MB01 |
| Video/Audio Input | IP Video Input Audio Input | PoE IP Camera x 8 Cameras with built-in mic |
| Video/Audio Output | HDMI Output Resolution VGA Output Resolution Audio output | 3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768 1920x1080, 1280x1024, 1280x720, 1024x768 1-Channel, RCA |
| Decoding | Video Format Live View / Playback Resolution Synchronous Playback | H.264, H.265 7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p Up to 4 channels |
| HDD | SATA External HDD Capacity | 1 x SATA interface (1 x 2TB HDD included) 1 eSATA Interface for HDD Up to 12TB (max. 6TB capacity for each HDD) |
| External Interface | USB Interface Network Interface | 2 x USB 2.0 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/ WAN 8, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera |
| PoE | Max. Power Per Port Supported Standard | 25W IEEE 802.3af/at |
| Network | Network Protocols Browsers Supported OS Supported Max. User Access | HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP Edge, Firefox, Chrome, Safari PC: Windows, Mac OS; smartphone: iOS, Android 20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams) |
| General | Power Supply Power Consumption Working Environment Dimensions Weight | DC 48V~53V <10W (Without HDD&PoE) Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90% 260 x 41 x 230mm 1.4kg |
| Warranty | Limited Warranty | 2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ . |

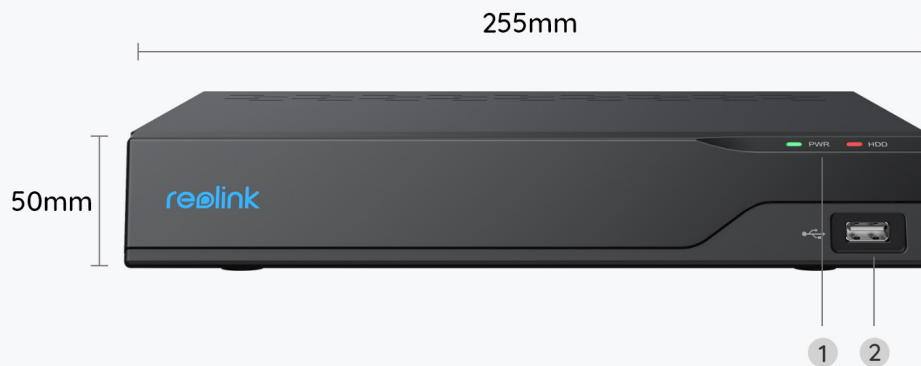

1 Power LED/HDD LED

2 USB Port

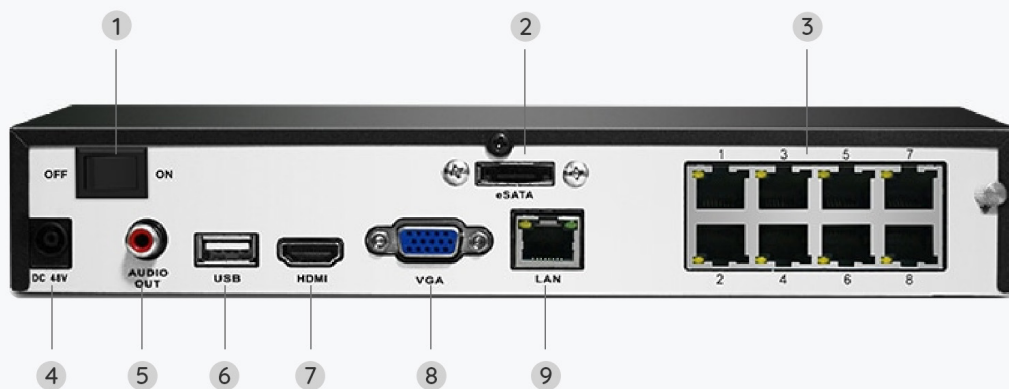

1 On/Off Switch

2 eSATA

3 RJ45

4 Power Input

5 Audio Out

6 USB Port

7 HDMI Port

8 VGA Port

9 Network

Best Companion



Mouse

Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>



Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>