

LG COOKING

LRE3060ST

6.3 cu. ft. Electric Single Oven Range

6.3 cu.ft Large Capacity
 UltraHeat™ 3.2kW Burner
 EasyClean®


AVAILABLE COLORS


CAPACITY		CONTROL		DIMENSIONS/CLEARANCES/WEIGHTS	
Oven Capacity (cu. ft.)	6.3 cu.ft.	Cooktop Control Type	Keypad	Shipping Weight (lbs)	191
Storage Drawer Capacity (cu.ft.)	0.8 (No Handle)	Oven Control Type	Keypad	Product Weight (lbs)	167
COOKTOP		Display	VFD	Cabinet Width (in)	30"
Type	Radiant	Language	English / Spanish / French	Overall Depth (in) - including handle	28"
No of Radiant Elements	5	Clock	12 hr or 24 hr (option)	Overall Height (in)	47 7/16"
Element Size/Wattage - Left Rear	1200 (6")	Kitchen Timer	Yes	Overall Width (in)	29 7/8"
Element Size/Wattage - Right Rear	1200 (6")	Timed Cook	Yes	Oven Interior Dimensions (in) (W x H x D)	24 1/2" x 20 1/4" x 19 3/8"
Element Size/Wattage - Left Front	3200 (9") / 1400 (6") (UltraHeat™)	Temperature Unit of Measure	Fahrenheit / Celsius	Height to Cooking Surface (in)	36"
Element Size/Wattage - Right Front	2500 (9")	Cooking Complete Reminder Volume	Beeper	Drawer Dimensions (in) (W x H x D)	22 3/16" x 4 1/2" x 16 3/8"
Center (Warming Zone)	100 (7")	APPEARANCE		Carton Dimensions (in) (W x H x D)	33 11/16" x 50 7/8" x 30 9/16"
Hot Surface LED Indicator	Yes	All Available Colors	Stainless Steel	POWER/RATINGS	
OVEN FEATURES		Handle/Knobs Colors	Stainless Steel	Amp Rating at 208V	46.1A
Broil Element (Watt)	Sheath 4200 / 6 Pass	Handle/Knobs materials	Stainless Steel/ PC+ABS	Amp Rating at 240V	52.5A
Oven Modes	Bake, Broil, Proof, Warm	Oven Door Feature	WideView™ Window	KW Rating at 208V	9.6kW
Oven Control Features	Keypad	Cooktop Finish	Black Ceramic + Grey Pattern	KW Rating at 240V	12.6kW
EasyClean®	Yes	SMART FEATURES		Required Power Supply (amp)	40A
No. of Rack Positions	7	SmartDiagnosis™	Yes	ACCESSORIES	
Automatic Safety Shut-Down	After 12 hours	DRAWER FEATURES		Standard Rack	2
Type	Storage (no Handle)			LIMITED WARRANTY	
				Parts & Labor	1 Year
				UPC CODES	
				LRE3060ST (Stainless Steel)	048232335453

LG COOKING

LRE3060ST

6.3 cu. ft. Electric Single Oven Range

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHT	
Cabinet Width (in)	30"
Overall Depth (in) - including handle	28"
Overall Height (in)	47 7/16"
Overall Width (in)	29 7/8"
Oven Interior Dimensions (in) (W x H x D)	24 1/2" x 20 1/4" x 19 3/8"
Height to Cooking Surface (in)	36"
Drawer Dimensions (in) (W x H x D)	22 3/16" x 4 1/2" x 16 3/8"
Carton Dimensions (in) (W x H x D)	33 11/16" x 50 7/8" x 30 9/16"
POWER/RATINGS	
Amp Rating at 208V	46.1A
Amp Rating at 240V	52.5A
KW Rating at 208V	9.6kW
KW Rating at 240V	12.6kW
Required Power Supply (amp)	40A




ELECTRICAL REQUIREMENTS

- This appliance must be installed and grounded on a branch circuit by a qualified technician in accordance with the National Electrical code ANSI/NFPA NO. 70 - latest edition.
- All wiring should conform to Local and NEC codes. This range requires a single-phase, 3 wire, A.C 120/208 V or 120/240 V 60 Hz electrical system. Use only a 3-conductor or a 4-conductor UL - listed range cord with closed-loop terminals, open-end spade lugs with upturned ends or similar termination. Do not install the power cord without a strain relief.
- A range cord rated at 40 amps with 120/240 minimum volt range is required. If a 50 amp range cord is used, it should be marked for use with 1 3/8" diameter connection openings. This appliance may be connected by means of a conduit or power cord. If a conduit is being used, check the Owners Manual for 3 wire conduit connections or 4 wire conduit connections.

⚠ WARNING

- Allow 2 to 3 ft (61.0 cm to 91.4 cm) of slack in the line so that the range can be moved if servicing is ever necessary.
- The power supply cord and plug should not be modified. If it will not fit the outlet, have a proper outlet installed by a qualified electrician.
- Using an extension cord to connect the power is prohibited. Connect the power cord and plug directly.
- Electrical ground is required on this appliance.
- Make sure that the power cord is not pinched by the range or heavy objects. Failure to do so can result in serious burns or electrical shock.


DIMENSIONS AND CLEARANCES

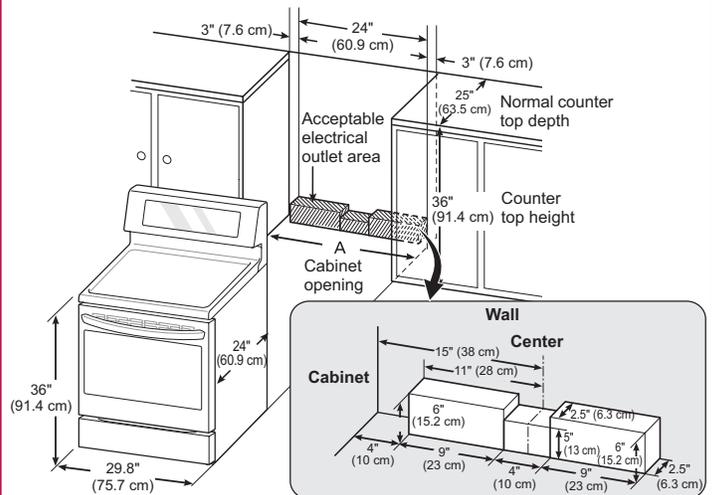

A = 30" (76.2 cm) For U.S.A

MINIMUM DIMENSIONS

- 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.
- 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.

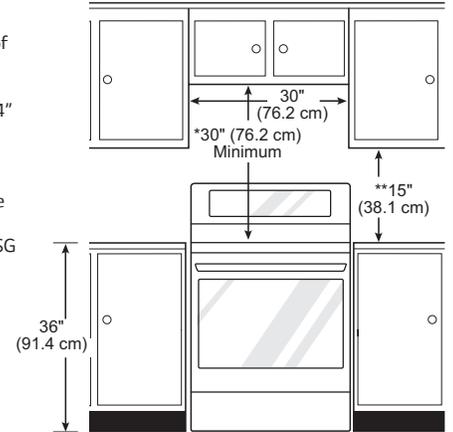

SPECIFIED POWER-SUPPLY-CORD KIT RATING

Range rating, watts		Specified rating of power supply-cord kit, amperes	Diameter (inches) of Range connection Opening	
120/240 volts	120/208 volts		Power cord	Conduit
3-wire	3-wire	40 or 50A	1 3/8"	1 1/8"
8,750 - 16,500	7,801 - 12,500		1 3/4"	1 3/8"
16,501 - 22,500	12,501 - 18,500	50	1 3/4"	1 3/8"



4 Wire receptacle (14-50R)



3 Wire receptacle (10-50R)