

Installation instructions

Refrigerator water filter

A replacement for the following water filters:

BOSCH® filter BORPLFTR50


Filter life: 6 months or 250 gallons, whichever comes first will vary based on water condition.

Installation instructions

Before installation:

- Shut off the cold-water supply to the refrigerator before installation. Turn on the refrigerator water dispenser to release water pressure, letting water drain from the pipe completely.
- It is normal for black carbon fines (particles) to appear on the outside of your filter. This happens when the filter is jarred in shipping. It is safe to simply wipe it off.
- The filter connectors are larger to prevent leaks. You might have to twist the filter hard to make sure the connection is secure.

1. Take out the existing filter by turning it counterclockwise.
2. Take out the new filter and carefully remove the packaging and protective cap from it.
3. Insert the new filter into the refrigerator filter receptacle. Rotate the filter clockwise. Ensure filter is fully installed in refrigerator head a full 1/4 turn. This is required to activate the internal valve inside the refrigerator. If the filter is not turned a full 1/4 turn, the valve will not fully open and may cause the water flow to be slow, or even cause the valve to make a chattering noise during use.

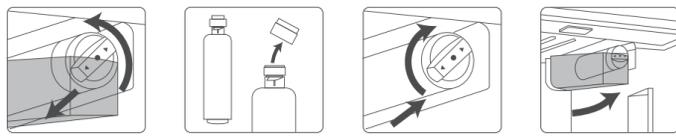

4. Turn on the water to rinse the filter for 5-min. If the flow is slow, remove and reinstall the filter, making sure to rotate the filter 1/4 turn.
- Note: The initial flow rate may be slower than expected. The total flow should resume within 24-36 hours.
5. Check the filter again for leaks.

⚠ Caution:

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Storage and maintenance:

- Replace your filter every 6 months or 250 gallons to prevent bacteria and fungus growth in your filter, supply lines, and storage tank.
- Keep your unused filters in a cool, dark, and dry place until you need them.
- If you do not use your water dispenser for more than four days, run two gallons of water before using it to prevent bad tasting water.

6015-42

210mm

140mm

Frequently asked questions:

Q: Why is it difficult to twist the new filter into the filter housing?

A: The connector may expand because of water pressure. Therefore, it is recommended you push the new filter in with a little bit of force, but not too hard. Then turn it clockwise.

Q: Do I need to flush the filter after installation?

A: After installation, it is highly recommended you run water for a few minutes before using. Water filters are made from advanced coconut carbon block, so there are some carbon fines in the filter. Flushing removes the carbon fines to produce clean water.

Q: Must the filter be changed every 6 months?

A: Yes, you must replace the filter every six months or sooner if water flow is reduced or if there is heavy sediment / rust present. Over-used filters will degrade the filtration performance.

⚠ Warning:

To reduce the risk of property damage due to water leakage, this filter MUST be installed in accordance with the manufacturer's specifications and instructions. This filter unit must be replaced every 250 gallons or 6 months. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product. BOSCH® is a registered trademark of BSH Home Appliances Corp. BOSCH® is used for reference purposes only.

*The service life mentioned above is subject to chlorine reduction. Actual result varies according to the local water quality.

Operating specifications:

Operating temperature: 33-100°F/0.6°C-38°C

Working pressure: 20 psi-100 psi/140-689 kPa

Rated capacity: 947 litres/250 gallons

Flow rate: 1.9 lpm/0.5 gpm

⚠ Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)

E-mail: service@water-filter.com

Made in China V003

Qingdao Ecopure Filter Co., Ltd.



印刷品技术要求

1. 工艺要求 覆光膜 覆亚膜 UV油 吸塑油 过油 丝印 镭射
2. 材质要求 80g双胶纸, 双面印刷
3. 颜色要求 单色印刷
4. 版面要求 网点清晰, 角度准确, 无重影; 覆膜表面平整、无褶皱; 纸张材质正确, 切边整齐、压线深浅适中。
套印误差: 平版印刷品≤0.1mm, 柔性印刷品≤0.2mm
模切尺寸误差: 成品偏差±0.4mm, 模切位置尺寸±0.8mm
图案位置偏差: ≤0.5mm



图像颜色请依据数码稿印刷

请不要擅自变更来稿件, 如须修改, 请联系伊可普做有关决定



青岛伊可普电器有限公司包材设计图纸

品牌		工厂型号	EFW-6015
包材文件名称	03070006015A00 EFF-6015S-42-说明书-V002		
尺寸规格	见图纸标注	比例尺	1:1
单位	mm	页数	
设计师	张鑫龙	审核日期	2024.3.27
DCR变更 (变更日期+变更描述)	2024.4.19 改寿命、改邮箱		