


## KM 7735 FL

30-inch induction cooktop, operated with its own controls with PowerFlex cooking area for maximum performance

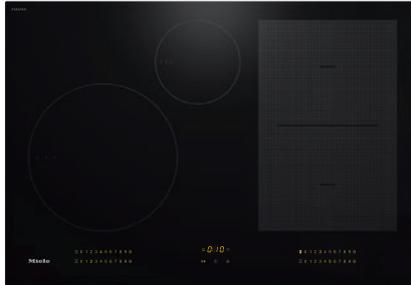


- Intuitive quick selection via number sequences – Smart Select
- 4 cooking zones incl. 1 powerful PowerFlex cooking area
- With a width of 30 3/8 (769) in (mm) for proud-mounted or flush-mounted installation
- Shortest heating-up times – TwinBooster
- Communication with the ventilation hood – automatic Con@ctivity function

EAN: 4002516611400 / Material number: 12074210 /  
Old Material Number: 26773570USA

|                                      |                        |
|--------------------------------------|------------------------|
| <b>Heating type</b>                  |                        |
| Fuel type                            | Induction              |
| <b>Design</b>                        |                        |
| Independent of oven                  | •                      |
| <b>Design</b>                        |                        |
| Elegant glass ceramic surface        | •                      |
| Flush                                | •                      |
| Surface-mounted/flush-fit            | •/•                    |
| Ceramic surface color                | Black                  |
| Proud installation                   | •                      |
| <b>Cooking zone details</b>          |                        |
| No. of rings                         | 4                      |
| Number of cooking areas              | 1                      |
| Maximum number of pans               | 4                      |
| <b>PowerFlex cooking zones</b>       |                        |
| No.                                  | 2                      |
| Type                                 | PowerFlex cooking zone |
| Size in mm                           | Ø 150 – 230            |
| Max. rating in W                     | 2100                   |
| Max. booster rating in W             | 3000                   |
| Max. TwinBooster rating in W         | 3700                   |
| <b>1st cooking zone/cooking area</b> |                        |
| Position                             | front left             |
| Type                                 | Variable cooking zone  |
| Size in mm                           | Ø 180-280              |
| Max. Booster power rating in W       | 3000                   |
| Max. rating in W                     | 2600                   |
| Max. TwinBooster power rating in W   | 3700                   |
| <b>2nd cooking zone/cooking area</b> |                        |
| Position                             | rear left              |
| Type                                 | Variable cooking zone  |
| Size in mm                           | Ø 100-160              |
| Max. Booster power rating in W       | 1700                   |
| Max. rating in W                     | 1400                   |
| Max. TwinBooster power rating in W   | 2200                   |
| <b>3rd cooking zone/cooking area</b> |                        |
| Position                             | right                  |
| Type                                 | PowerFlex bridge       |
| Size in mm                           | 230x390                |
| Max. Booster power rating in W       | 4800                   |
| Max. rating in W                     | 3400                   |
| Max. TwinBooster power rating in W   | 7400                   |
| <b>User convenience</b>              |                        |
| Networking with Miele@home           | •                      |
| Automatic function                   | Con@ctivity 3.0        |
| Pan and pan size recognition         | •                      |
| Operation via touchpad sensors       | Smart Select           |
| Display color                        | Yellow                 |

## KM 7735 FL

30-inch induction cooktop, operated with its own controls with PowerFlex cooking area for maximum performance

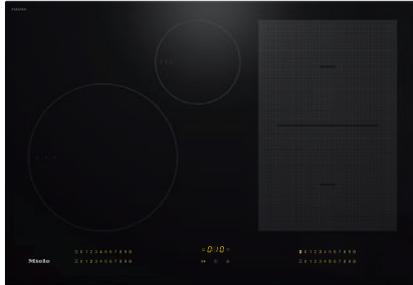


EAN: 4002516611400 / Material number: 12074210 /  
Old Material Number: 26773570USA

|  |                    |
|--|--------------------|
| Permanent pan recognition  | •                  |
| Stop & Go function   | •                  |
| Wipe protection  | •                  |
| Recall function  | •                  |
| Minute minder  | •                  |
| Automatic switch-off for all rings                               | •                  |
| AutoBoost  | •                  |
| Keep-warm function   | •                  |
| Individual setting options (e.g. acoustic signal tones)          | •                  |
| <b>Cleaning convenience</b>                                      |                    |
| Easy to clean ceramic glass                                      | •                  |
| <b>Safety</b>  |                    |
| Safety cut-out   | •                  |
| Lock function  | •                  |
| System lock  | •                  |
| Integrated cooling blower  | •                  |
| Overheating protection   | •                  |
| Residual heat indicator  | •                  |
| <b>Technical data</b>  |                    |
| Dimensions (width) in in. (mm)                                   | 30 3/8 (769)       |
| Dimensions (height) in in. (mm)                                  | 3 1/8 (77)         |
| Dimensions in mm (depth)   | 21 1/4 (538)       |
| Cutout dimensions (width) in in. (mm)                            | 28 5/8 in (724 mm) |
| Cutout dimensions (depth) in in. (mm)                            | 20 1/2 in (518 mm) |
| Casing height incl. connection box in mm                         | 3 7/8 (98)         |
| Internal cutout dimensions in mm (width) with flush installation | 749                |
| Internal cutout dimensions in mm (depth) with flush installation | 518                |
| Weight in lbs. (kg)  | 46 (21)            |
| External cutout dimensions in mm (width) with flush installation | 773                |
| External cutout dimensions in mm (depth) with flush installation | 542                |
| Total connected load in kW                                       | 7.60               |
| Power cord length in in. (m)                                     | 3 (1.2)            |
| Voltage in V   | 208-240            |
| Frequency in Hz  | 50-60              |
| <b>Standard accessories</b>                                      |                    |
| Power cord   | Yes                |

## KM 7735 FL


30-inch induction cooktop, operated with its own controls with PowerFlex cooking area for maximum performance

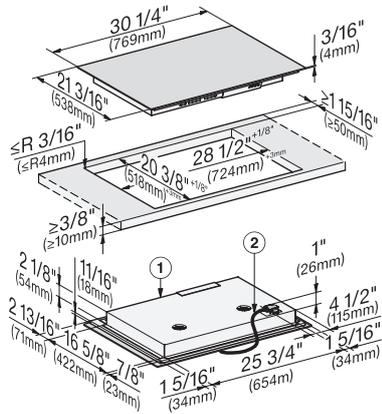

KM7735FL – frameless overlaying installation

(\*footnote) – drawing

1 front, 2 Flexible metal hose with power cords, L = 4' (1,200 mm),

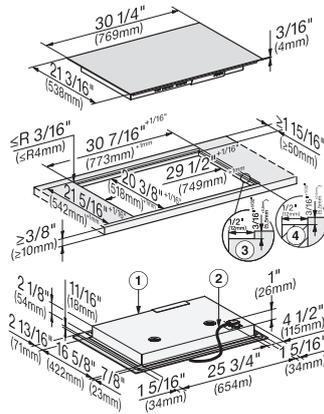

KM7735FL – flush installation (\*footnote) – drawing

1 Front, 2 Flexible metal hose with power cords, L = 4' (1,200 mm), 3 Stepped cut-out, natural stone countertop, 4 Wooden strip 1/2" (12 mm) (not supplied)