



## Key Features

Bright Images in any Environment | Up to 20,000 hours lamp life | Easy LAN Control | SuperColor: Amazing Color Accuracy



## Product Description


The ViewSonic® PG706HD 1080p projector features 4,000 lumens, Full HD 1920x1080 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With a shorter throw ratio, 1.2x optical zoom, vertical keystone, and extensive connectivity, the PG706HD provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. The PG706HD is the ideal projector for both high-definition presentations and vibrant multimedia entertainment.

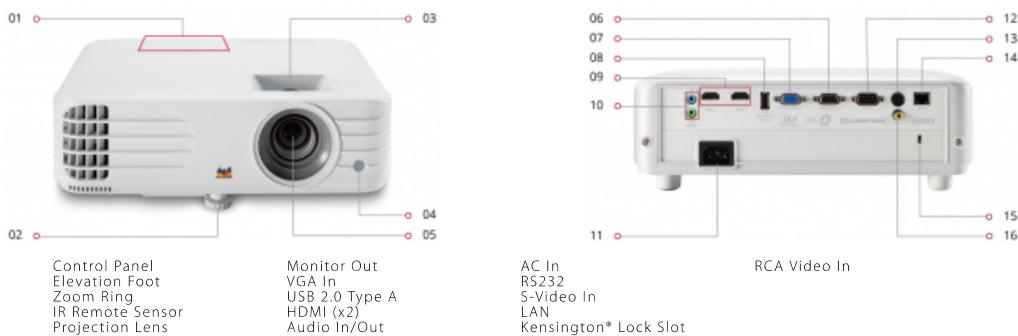

1920 x 1080  
RESOLUTION



4,000 ANSI  
LUMENS



1.5-1.65  
THROW RATIO

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP Lamp
Resolution Type:	HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	4,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.3 - 36.0 ft / 1.0 - 11.0 m
Throw Ratio:	1.5-1.65
Keystone:	Vertical ( $\pm 40^\circ$ )
Lens:	1.1x optical zoom
Light Source (watt):	245
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Aspect Ratio:	16:9

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

**Connector:**

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4(1), HDMI 1.4 (with HDCP 1.4)(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1)

**Audio:**

Internal Speakers:	10W (x1)
--------------------	----------

**Power:**

Consumption (typical):	355W
Stand-by:	<0.5W

**Controls:**

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	6.2
Gross (lbs):	8.7

**Weight (metric):**

Net (kg):	2.8
Gross (kg):	3.9

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	16.3 x 6.6 x 11.7
Physical (in.):	12.3 x 8.7 x 4.3

**Dimensions (metric) (WxHxD):**

Packaging (mm):	415.0 x 168.0 x 297.0
Physical (mm):	312.0 x 222.0 x 108.0

**General:**

Regulations: FCC, cTUVus, ROHS
PACKAGE CONTENTS: PG706HD projector, power cable, VGA cable, remote control, Quick Start Guide
Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.
UPC: 766907001792

**Accessories:**

HB10B, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, VC10, VCB10
--

Copyright © ViewSonic Corporation 2000-2019. All rights reserved. (04/04/2019 01:58 PM PST)