


ASSEMBLY

RSP-110V2 / INSTRUCTION GUIDE

PACKAGE CONTENTS

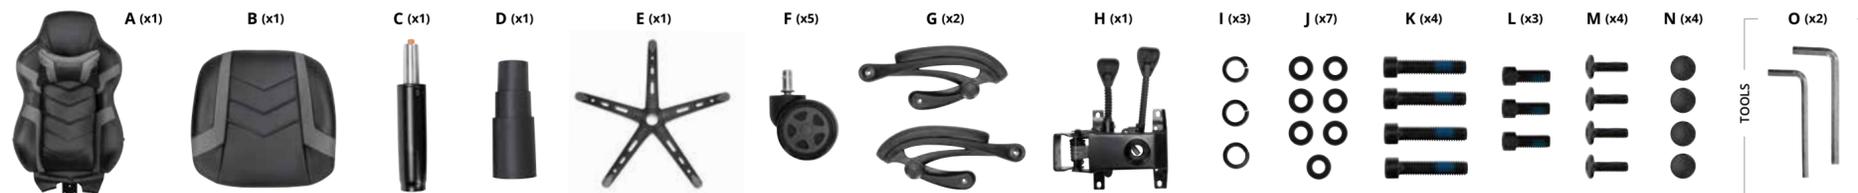

A

1. Lay out and identify components on a nearby table or flat surface.
2. Unfold 5-star base (E) and lay color side down on flat surface.



B

3. Install casters (F) by pushing casters into 5-star base (E) until seated.



C

4. Turn 5-star base (E) back over.
5. Place gas cylinder assembly (C) into center of 5-star base (E) and then install gas cylinder cover (D). Place 5-star base assembly on the floor.



D

6. Place seat bottom (B), bottom side up, on a flat surface.
7. Locate seat mechanism (H) and center seat mechanism over screw holes in the seat bottom with seat back bracket facing out and over the edge of seat bottom.



E

8. Locate the 4 screws (M) and washers (J). Feed screw (M) through washer (J).
9. Hand thread all 4 screws 2-3 rotations to ensure the proper seating of mechanism. Go back and tighten seat mechanism screws thoroughly with the Allen wrench (O).



F

10. Turn over seat bottom so the seat mechanism is facing down, grab the 5-star base assembly and align gas cylinder with hole on seat mechanism as shown.



G

11. Grab the seat back (A) and slide the seat tail **inside** the seat mechanism bracket.
12. Line up the holes so that you can see the threaded seat tail screw holes through the seat mechanism holes.



H

13. Locate the 3 screws (L), lock washers (I), and flat washers (J). Feed screw (L) through lock washer (I) followed by flat washer (J).
14. Start with the center top screw and hand thread 2-3 rotations. You can adjust chair back, as needed, to align the other screw holes. Screw in the other two screws 2-3 rotations.



I

15. Tighten the 3 seat back attachment screws thoroughly with the Allen wrench (O).
16. Velcro seat back trim flaps to the seat base.



J

17. Find arms (G), there is a right and a left arm, and affix arms to the chair with screws (K).
18. Tighten all 4 arm screws thoroughly with Allen wrench (O).



K

19. Install screw cover caps (N) into the arm screw holes.



L

20. Last step is to sit in your new chair to fully secure the gas cylinder to the seat assembly and make sure chair is fully functional.

YOU'RE FINISHED, ENJOY!

USAGE INFO

RSP-110V2 / CONTROLS & CLEANING

SAFETY INFORMATION



GENERAL CARE AND MAINTENANCE

- ✓ Extended exposure to direct sunlight can cause the chair material to crack and color to fade.
- ✓ Keep your pets off of the chair. Their claws and teeth may damage the chair material.
- ✓ Sweat may become an issue as the moisture and oils can damage the chair material. Follow the cleaning guide and wipe the chair clean every so often.
- ✓ Follow care and proper use. Misuse can lead to damage, not just to the chair but to you as well.

ATTENTION

Make sure all bolts and screws are fully tightened before using chair. Lubricate all moving parts and tighten all bolts/screws every 6 month or whenever needed.


⚠WARNING

To ensure proper assembly, follow all steps and use all parts. Failure to follow this warning can result in serious injury to yourself or others.

CONTROLS



CLEANING

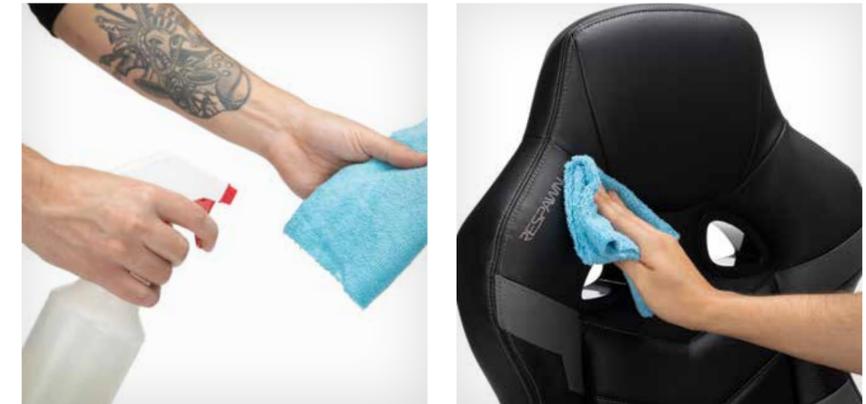

Use a lint-free microfiber cloth with a mild soap-and-water solution to clean the chair surfaces.



Gently wipe all areas to remove any surface dust.

VISIT OUR WEBSITE TODAY



SCAN ME!
USING YOUR CAMERA
RESPAWNPRODUCTS.COM

SCAN NOW FOR INSTANT WEBSITE ACCESS:



ASSEMBLY
VIDEO



WARRANTY
INFORMATION



FUTURE DEALS
& GIVEAWAYS!