

# JVC

# DLA-NZ900

## 8K Home Theater Projector

**D-ILA** **8K**  
e-shiftX

## The ART of PROJECTION

### A True Cinematic Experience

The sheer beauty of D-ILA images is a result of over 25 years of JVC engineering and technology. Exceptional brightness of 3,300 lumens, and native contrast ratio of 150,000:1 are achieved with Gen3 native 4K D-ILA devices combined with BLU-Escent Laser. The projector also benefits from the embedded HDR metadata to provide the ultimate HDR experience. Added to this are the new Gen2 8K/e-shiftX with 8K Scaling Engine and HQ lens system, resulting in pixel perfect home-theater projection with greater detail, dimensionality and contrast.

#### KEY FEATURES

- Proprietary, Gen3, 0.69-inch Native 4K D-ILA Devices (x3)
- 3,300-lumen BLU-Escent Laser phosphor light engine
- Pixel perfect – Gen2 8K/e-shiftX with New 8K Scaling Engine featuring 4-way, multi-axis shift yields 8,192- x 4,320-pixel projection
- 150,000:1 native contrast,  $\infty$  (infinite):1 dynamic contrast ratios delivers images brimming with reality
- 101-step Laser Light Control by slider adjustment
- Premium 100 mm All-glass Lens with 2X zoom, 100% vertical, 43% horizontal shift
- High-contrast Optical Block
- Two 48Gbps HDMI/ HDCP 2.3 inputs – 8K/60p and 4K/120p
- Gen2 Frame Adapt HDR dynamic tone mapping with Theater Optimizer
- New Deep Black function extends dark tones with far greater contrast
- HDR10+ compatibility
- DML (Display Mastering Luminance) adjusts/sets the dynamic range for better HDR experience
- Picture mode "Vivid" for projecting animated works and game CGs in SDR format
- Wide Color Gamut with Cinema Filter (over 100% DCI-P3)
- Built with hand-selected components
- Installation Mode with 10 customizable presets
- ISF Certified, plus JVC Auto Calibration
- Clear Motion Drive for the smoothest video
- Multiple Pixel Control (MPC) for increased sharpness and detail
- Low Latency Mode effective when displaying high frame-rate gaming content
- Controls: Control4 SDDP, LAN, RS-232C, IR, 12V screen trigger out, 3D sync out
- 3-year Warranty with first year advanced replacement

Procision

**BLU** Escent  
Laser




100mm HQ Lens

## Gen3, Native 4K D-ILA Device

The third-generation 0.69-inch native 4K D-ILA device offers the native contrast ratio of 150,000:1. Also, improvements in the manufacturing process resulted in improved screen uniformity for enhanced image quality.


## 4K D-ILA



## 3,300lm BLU-Escent Laser

## BLU-Escent Laser

JVC's original BLU-Escent Laser light source has been optimized to achieve exceptional peak brightness of 3,300 lumens with longevity of 20,000 hours. Housed in a compact casing, the laser light engine provides higher output, greater efficiency, and quieter operation, making it an excellent solution for demanding home theater installations.



## Pixel Perfect 8K Out with 8K/e-shiftX

Whether the source is 4K or 8K, the latest Gen2 8K/e-shiftX high-resolution display technology uses a 240Hz driver with 4-way, multi-axis shift to flash the screen four times to deliver pixel perfect 8K resolution.




See how the native 4K image becomes sharper as if it is alive with the newest 8K/e-shiftX processing.

## All-glass, All-aluminum HQ Lens System

The 100-mm HQ lens system with 18-element, 16-group all-glass lens and five ED lenses projects high-resolution images to every corner of the screen, while securing wide shift ranges of 100% vertically and 43% horizontally to enable faithful reproduction of distortion-free 8K images regardless of where it is installed.



## External Dimensions/Unit: inches (mm)

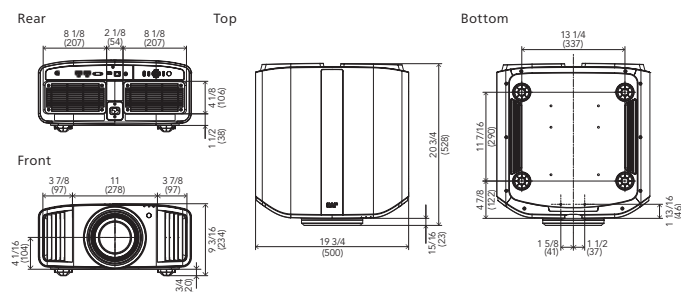


• Design and specifications are subject to change without notice. • All pictures in this brochure are simulated. • D-ILA and e-shift are registered trademarks of JVCケンウッド Corporation. • BLU-Escent Laser is a trademark of JVCケンウッド Corporation. • FILMMAKER MODE™ logo and its trade name are registered trademarks of UHD Alliance, Inc. in the US and other countries. • HDR10+™ logo is a trademark of HDR10+ Technologies, LLC. • YouTube™ is a trademark or registered trademark of Google LLC. • ISF is a registered trademark of Imaging Science Foundation, Inc. • The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. • All other brand or product names may be trademarks and/or registered trademarks of their respective owners. • Any rights not expressly granted herein are reserved.

Copyright © 2024, JVCケンウッド Corporation. All Rights Reserved.

## Gen2 Frame Adapt HDR offers Deeper Blacks and More

The 2nd generation Frame Adapt HDR function instantaneously analyzes the different peak brightness per scene or per frame for HDR10 content and performs real-time tone mapping for optimized brightness, color and details. When combined with each of the following modes including the new Deep Black function, the projector detects and analyzes data contained in HDR sources to project the best of what each source has to offer:



Original Image




Frame Adapt HDR (Conventional)



Gen2 Frame Adapt HDR


- **Deep Black function** subdues tones in dark areas for more realistic darkness,
- **DML (Display Mastering Luminance)** adjusts/sets the dynamic range to match the image for a much better HDR experience, and
- **FILMMAKER MODE™** recreates picture quality that is faithful to the original master.



Deep Black Function

## Picture Mode "Vivid"

Made to reproduce SDR content with a narrow dynamic range in more saturated colors with greater vividness, the Vivid mode is excellent for SDR animated works and gaming CGs.



Picture Mode Vivid

## Dual 48Gbps HDMI Inputs – 8K/60p and 4K/120p

Full 8K input is enabled with 48Gbps 8K/60p HDMI input with HDCP 2.3. Also, 4K120p input that is used with Low Latency Mode is excellent for high frame-rate gaming platforms.

 For more information, scan/click on the QR code to access:

Official Website of the new D-ILA projectors



Screen adjustment mode table



## Optional Accessory

PK-EM2  
RF 3D Synchro Emitter



## Specifications

| GENERAL                                |                                                                    | DLA-NZ900                                                  |
|----------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------|
| Device                                 | 3rd Generation 0.69-inch Native 4K D-ILA Device (4096 x 2160) x3   |                                                            |
| Display Resolution                     | 8192 x 4320 (Gen2 8K/e-shiftX)                                     |                                                            |
| Lens                                   | x2 motorized zoom & focus, all-glass lens, 100 mm diameter         |                                                            |
| Lens Shift                             | Vertical: ±100%, Horizontal: ±43% (motorized in 16:9 aspect ratio) |                                                            |
| Projection Display Size                | 60 inch – 300 inch diagonal                                        |                                                            |
| Light Source                           | BLU-Escent Laser Diode                                             |                                                            |
| Brightness                             | 3,300 lm                                                           |                                                            |
| Contrast Ratio                         | Native: 150,000:1, Dynamic: ∞:1                                    |                                                            |
| Cinema Filter (Color Gamut)            | DCI-P3                                                             |                                                            |
| Input Terminal                         | HDMI                                                               | 2 (48 Gbps/HDCP 2.3, no support for CEC)                   |
|                                        | TRIGGER                                                            | 1 (Mini Jack, DC 12 V/100 mA)                              |
| Output Terminal                        | 3D SYNCHRO                                                         | 1 (Mini-Din 3-pin)                                         |
|                                        | RS-232C                                                            | 1 (D-sub-9pin)                                             |
| Control Terminal                       | LAN                                                                | 1 (RJ45)                                                   |
|                                        | SERVICE                                                            | 1 (USB Type A) for firmware update and backing up settings |
| Power Consumption                      | 440W (Network standby: 1.5W, Eco-mode standby: 0.3W)               |                                                            |
| Fan Noise                              | 24 dB (LD power at minimum)                                        |                                                            |
| Power Requirement                      | AC 100-240V, 50/60Hz                                               |                                                            |
| Dimensions (W x H x D, including feet) | 19.66 in x 9.21 in x 27.78 in / 500 mm x 234 mm x 528 mm           |                                                            |
| Weight (net)                           | 55.7 lb / 25.3 kg                                                  |                                                            |



DISTRIBUTED BY

<https://www.jvc.com/>

PJF-24001UG  
Printed in the U.S.A.

"JVC" is the trademark or registered trademark of JVCケンウッド Corporation.