


## Key Features

Streamlined Desktop Display Solution | Enhanced Productivity with Dual Monitor Setup | Reduce Clutter with Single-Cable Solution | A More Comfortable Workspace | Command and Control Made Easy



## Product Description

Designed to boost productivity and maximize output, the ViewSonic® VG2756-2K is a 27" QHD docking monitor that transforms your desktop into a streamlined and efficient workspace. Enjoy reliable and flexible network connectivity with the integrated gigabit Ethernet port, while the latest USB Type-C connectivity and Daisy Chain capability makes dual-monitor setup a breeze. That's not all, the integrated USB hub also provides single-cable simplicity for connecting and charging your peripherals and accessories. A best-in-class ergonomic design features 40-degree tilt and bi-directional pivot so your screen and workspace are as comfortable as you need. In addition, the included vDisplay software gives you quick and easy OSD control, as well as customized screen templates for easy multi-tasking. This monitor is also shipped in eco-friendly biodegradable packaging, along with an easy-to-install quick release stand that makes for quick deployment and a lower total cost of ownership.

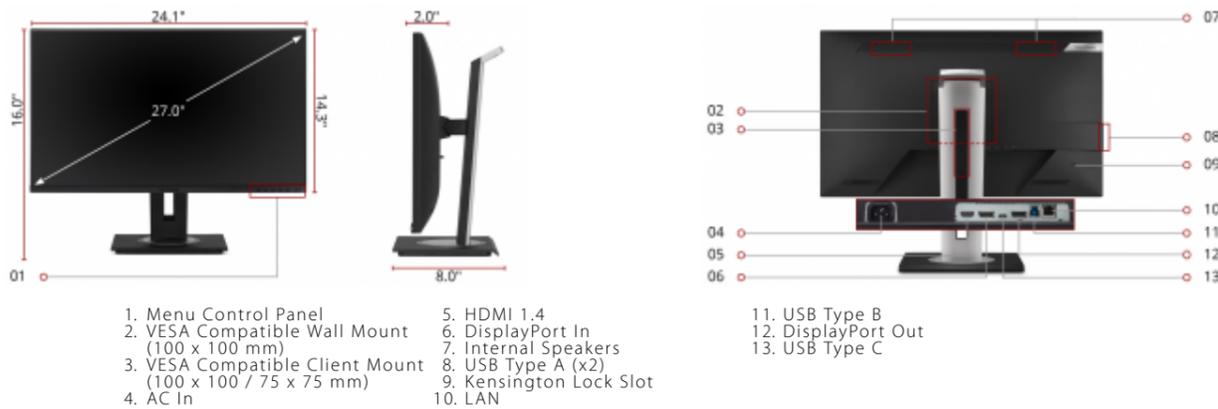

27"  
**DISPLAY**



IPS  
**PANEL**



2560 x 1440  
**RESOLUTION**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS
Resolution:	2560 x 1440
Resolution Type:	QHD (2560x1440)
Static Contrast Ratio:	1,000:1
Dynamic Contrast Ratio:	50,000,000:1
Light Source:	LED
Brightness:	350 cd/m2
Colors:	16.7M
Color Space Support:	8 Bit
Aspect Ratio:	16:9
Response Time (Typical GTG):	14ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating (3H)

**Compatibility:**

PC Resolution (max):	2560 x 1440
Mac® Resolution (max):	2560 x 1440

**Connector:**

USB 3.2 Gen 1 Type A(2), USB 3.2 Gen 1 Type B(1), USB 3.2 Gen 1 Type C(1), Ethernet LAN (RJ45)(1), HDMI 1.4 In(1), Display Port(1), Display Port Out(1)

**Audio:**

Internal Speakers:	2W (x2)
--------------------	---------

**Power:**

Eco Mode (Conserve):	16.8
Eco Mode (optimized):	21.2
Consumption (typical):	30.7
Consumption (max):	67.0
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W
Power Supply:	Internal

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Controls:**

Physical Controls:	1,2,3,4,5,6 (Power)
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

**Mount:**

VESA Compatible:	100 x 100 mm
------------------	--------------

**Video Signal:**

Frequency Horizontal:	15 ~ 90 KHz
Frequency Vertical:	49 ~ 75 Hz

**Video Input:**

Digital Sync:	TMDs for HDMI (v1.4), PCI-E for DisplayPort (v1.2), Micro-Packet for USB Type C
---------------	---

**Ergonomics:**

Height Adjust:	130 mm / 5.1 in
Swivel:	120°
Pivot (Right/Left):	90° / 90°
Tilt (Forward/Back):	40° / 5°

**Weight (imperial):**

Net (lbs):	15.2
Net Without Stand (lbs):	9.9
Gross (lbs):	22.5

**Weight (metric):**

Net (kg):	6.9
Net Without Stand (kg):	4.5
Gross (kg):	10.2

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	27.2 x 8.6 x 16.9
Physical (in.):	24.1 x 16.0 x 8.0
Physical Without Stand (in.):	24.1 x 14.3 x 2.0

**Dimensions (metric) (WxHxD):**

Packaging (mm):	692.0 x 218.0 x 430.0
Physical (mm):	613.0 x 406.0 x 202.0
Physical Without Stand (mm):	613.0 x 363.0 x 52.0

**General:**

Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy

PACKAGE CONTENTS: VG2756-2K, Power Cable, DP to DP Cable, USB Type C cable, USB Type B Uplink Cable, Quick Start Guide

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907008548