

THANK YOU!

For purchasing the new ESCORT M1 Dash Cam

Working side-by-side with your compatible ESCORT or Beltronics detector, the M1 provides cutting edge features, phenomenal video quality, and ease of use.

Full manual available at: www.escortradar.com




THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

©2018 ESCORT Inc. ESCORT® is a trademark of ESCORT Inc. APPLE AND THE APPLE LOGO ARE TRADEMARKS OF APPLE INC., REGISTERED IN THE U.S. AND OTHER COUNTRIES. APP STORE IS A SERVICE MARK OF APPLE INC. ANDROID, GOOGLE PLAY, AND THE GOOGLE PLAY LOGO ARE TRADEMARKS OF GOOGLE INC. AND ANY USE OF SUCH MARKS BY ESCORT IS UNDER LICENSE.

ESCORT M1


- **Wi-Fi Connection** to the Escort M1 App
- **1080P Full HD** with Enhanced Night Vision & Wide Dynamic Range
- **Super-Capacitor Technology** to Withstand Extreme Temperature Operation

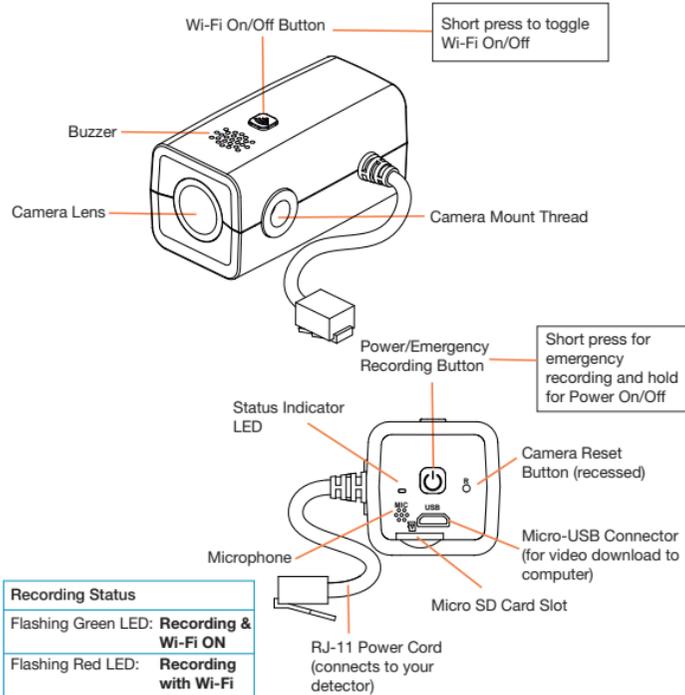

Recording Status	
Flashing Green LED:	Recording & Wi-Fi ON
Flashing Red LED:	Recording with Wi-Fi OFF
Alternating Green & Red LED:	Emergency Recording
Solid Red LED:	Error

Attach ESCORT M1 to Sticky Cup Mount


Remove your detector from the sticky mount and attach the M1 as shown below.

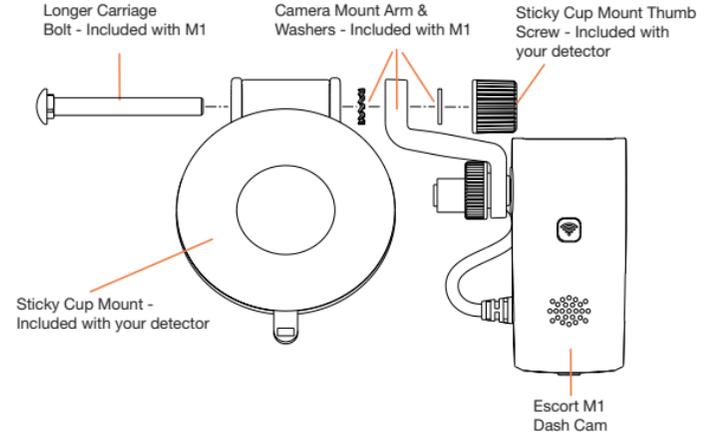


Note: Some components from your compatible detector's mount will be used. Your M1 is pre-mounted on the Camera Mount Arm.

Mounting to the Windshield

- 1 Attach radar/laser detector to sticky cup mount with M1 installed

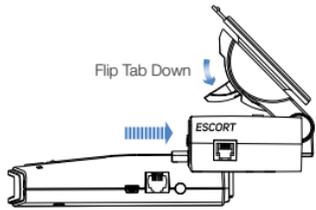


- 2 Mount to windshield

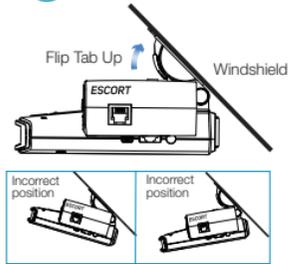


Important: Make sure the M1 (not the detector) is centered on your windshield.

- 3 Connect M1 power cable to radar/laser detector

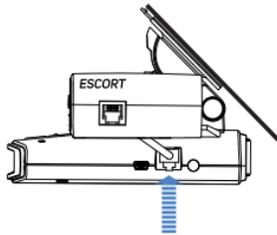

- 4 Connect Smart Cord to M1 and 12V power source

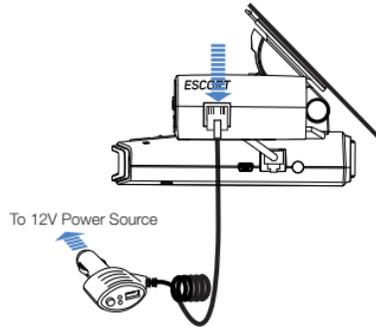

Download the App

Download the Escort M1 App from the App Store or Google Play and install it on your smartphone. Follow the Tutorial on the App.



Connect the M1 to your Smartphone

Once you have installed the M1 App, follow the steps below to connect the M1 to your smartphone:

1. Connect to M1 Dash Cam using the Wi-Fi menu on your smartphone.
2. Find Wi-Fi SSID "Escort M1" and enter the password "12345678."
3. After your smartphone Wi-Fi is connected to the M1, live view will be available from the dash cam on the smartphone screen.

Troubleshooting

If your unit is not operating properly, please follow these troubleshooting steps:

- Make sure the power cord to the M1, as well as the pigtail cord from the M1 to the detector, are both properly connected.
- Make sure the socket of your vehicle's cigarette lighter is clean and free of corrosion.
- Make sure the power cord's adapter is firmly seated in your cigarette lighter, and the power LED is on.
- Make sure the micro SD memory card is properly inserted into the memory card slot.
- If there is still an SD card error, format the SD card from the app. Please note this will delete all files stored on the card.

Customer service toll-free number: 1-800-543-1608

For a detailed and up-to-date FAQ's, please visit www.escortradar.com/support/faqs

ESCORT M1

DASH CAM



Radar/Laser Detector not included

QUICK START GUIDE