

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

CONVECTION SPEED OVEN, 30"



OVERVIEW

Designed to complement our Professional style wall oven and warming drawer, this built-in Convection Speed Oven seamlessly integrates into any kitchen design, with a stylish stainless steel finish. With the flexibility of both microwave and oven technology, it features six cooking functions including True Convection and Broil. Pair with other companion products to create a kitchen suite for every need.

MODELS

Convection Speed Oven, 30", Stainless steel
OM30NPX1

SERIES & STYLE

Series 9
Professional Style

FEATURES

- ① Part of our suite of companion products, designed to match aesthetically for flexible configurations
- ② Pairs perfectly with the Professional style 30" Oven and Warming Drawer
- ③ Intuitive touch display for ease of use
- ④ Flexibility of both microwave and oven technology, with six cooking functions
- ⑤ A CoolTouch door ensures it's safe to touch from the outside, protecting hands
- ⑥ Easy-to-clean stainless steel interior
- ⑦ 1.3 cu ft total gross capacity
- ⑧ Full width broil function with 1500W power
- ⑨ Program in desired cooking function and duration with automatic cooking feature
- ⑩ 900W microwave power and 1500W fan element power

ACCESSORIES

- ① Baking pan and wire shelf
- ② Turntable wire stand
- ③ Glass turntable

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

CONVECTION SPEED OVEN, 30"

SPECIFICATIONS

Model No.	OM30NPX1
Dimensions	H 18 1/2" (470mm) x W 29 13/16" (757mm) x D 22 3/8" (568mm)
Total capacity	1.3 cu ft (37L)
Electrical	
Supply	120V / 208V - 120V / 240V 60Hz
Service	15 Amp circuit
Receptacle	Hard wired


PRODUCT DIMENSIONS



ISO VIEW

	in	mm
(A) Overall height of speed oven	18 1/2	470
(B) Overall width of speed oven	29 13/16	757
(C) Depth of speed oven front and control panel	1 9/16	40
(D) Depth of speed oven chassis	20 13/16	528

CAVITY DIMENSIONS: STANDARD INSTALLATION

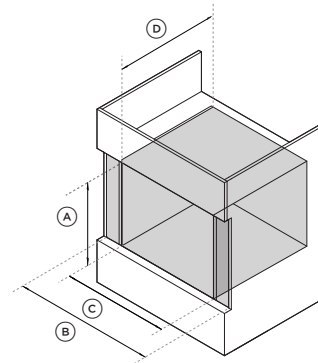

ISO VIEW

	in	mm
(A) Minimum inside height of cavity*	18 1/16	459
(B) Minimum inside width of cavity	29 15/16	761
(C) Minimum inside width of inner cavity	22 1/16	560
(D) Minimum inside depth of cavity - proud install	22 1/16	560
Minimum inside depth of cavity - flush install	23 5/8	600

*A spacer must be installed in the base of the cavity, see installation guide for further details.

Note: Ventilation required at the rear of the cavity.