



# THRU-THE-WALL AIR CONDITIONER WITH REMOTE



TTW COOL

8K | 10K | 12K | 14K BTU



### QUALITY AIR FLOW

This AC's 4-way ventilation ensures even and consistent cooling throughout your space.



### WORKS WITH SMART HOME DEVICES

This thru-the-wall unit works with smart home devices like Amazon Alex and Google Assistant so you can control it with simple voice commands.



### BUILT-IN DEHUMIDIFIER

Set the thru-the-wall unit to Dry Mode to pull moisture from the air and improve your space's air quality.



### REMOTE ACCESSIBLE:

Don't get up, use this AC's included remote or the TCL Home app to control its settings from a distance.



### ENERGY EFFICIENT:

This unit's Sleep and Eco settings help minimize costs and keep your energy bill low.

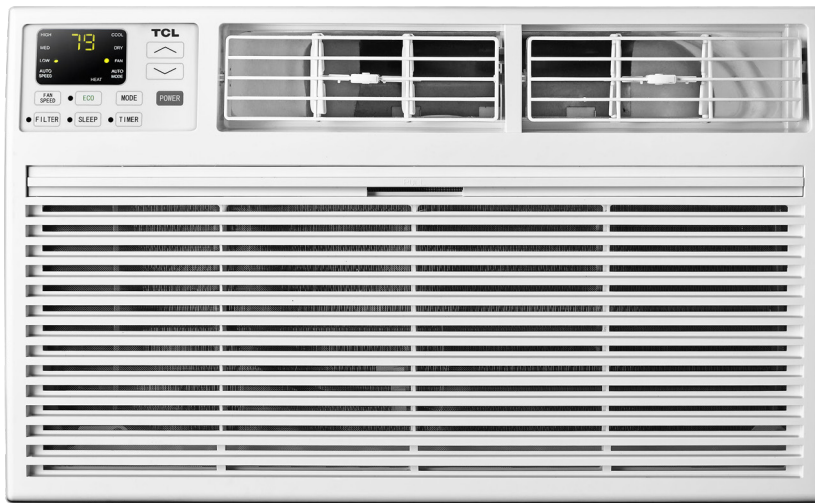








### MULTIPLE FAN SPEEDS

Choose from low, medium, high, and automatic fan speeds to find the right balance and keep things comfortable.



With a lineup of award-winning televisions, audio products, mobile devices, and appliances, TCL delivers meaningful experiences through thoughtful design and the latest technology, helping you enjoy more of the things you love.



MODEL	THRU-THE-WALL AIR CONDITIONER					
SKU	H8T9E1-A	H10T9E1-A	H10T9EX1-A	H12T9E1-A	H12T9EX1-A	H14T9EX1-A
BTU/H	8,000	10,000	10,000 / 9,800	12,000	12,000 / 11,600	14,000 / 13,600
Application Area (Cooling EPA)	300-350 sq. ft.	400-450 sq. ft.	400-450 sq. ft.	450-550 sq. ft.	450-550 sq. ft.	450-550 sq. ft.
Power Supply (Ph-V-Hz)	1Ph-115V-60Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph, 230/208V, 60Hz
Cooling Speeds	Fan - Mute - Low - Medium - High					
Estimated Yearly Energy Cost	77	96	96	114	114	143
Control	Remote - Included					
Max. Input Consumption (W)	1000.00	1200.00	1200.00	1400.00	1400.00	1780
Product Dimensions (WxDxH)	24.21 in x 20.28 in x 14.53 in					
Net Weight	60.6 lbs	65.0 lbs	63.9 lbs	69.4 lbs	71.7 lbs	72.8 lbs
Wall Sleeve Size Requirement (WxDxH)	26 in x 20 in x 15.75 in					
RATED CEER (Btu/w.h,w/w)	10.1	10.1	10.1	10.00	10.10	9.3 / 9.5
RATED Input (W)	790	980.00	980 / 960	1160.00	1160 / 1130	1460 / 1400
RATED Current (A)	8.5	11.00		11.50	5.1 / 5.4	7.5 / 8.5
Refrigerant	R32	R32	R32	R32	R32	R32
Temperature Range	61°-88°	61°-88°	61°-88°	61°-88°	61°-88°	61°-88°
Plug Type	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI
Plug Face	 115V / 15 AMP	 115V / 15 AMP	 15A / 230 V	 115V / 15 AMP	 15A / 230 V	 20A / 230 V