

POWER

POWERACOUSTIK.COM

ACOUSTIK®

2017



SUBWOOFERS | AMPLIFIERS | SPEAKERS | SOURCE UNITS | ACCESSORIES




INCITE SOURCE UNITS



hands-free calling, Adaptive Fast Charging of enabled mobile devices, and more. Select Incite units add multi-color illumination or an advanced audio staging equalizer. Available models include 2-DIN with 6.2" LCD touchscreen, 1-DIN with 7" LCD touchscreen, 1-DIN with 3.4" LCD, and even a 2-DIN with 10.3" LCD touchscreen!



Premium Incite Source Units feature GPS turn-by-turn navigation for all 50 United States, powered by iGo Primo. Set your destination to one of nearly 17 million available points of interest, or your own unique location. Follow the on-screen directions or audible text-to-speech commands, including lane departure guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more! Map updates available from Naviextras.com.

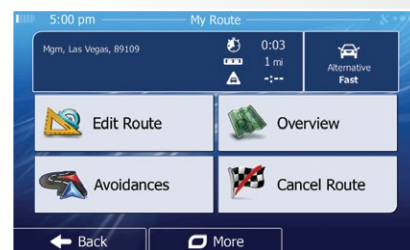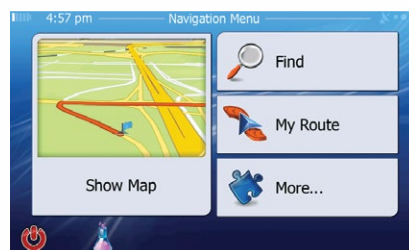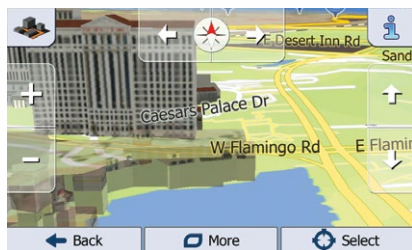

GPS Navigation models include Android PhoneLink mobile device integration, enabling complete control of your Android smartphones and tablets. Conveniently launch any application, post social

media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. Android PhoneLink ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.



Everything, Everywhere


In addition to Aptix's great features, select models include interface for SiriusXM's satellite radio tuner SXV300 (sold separately). Welcome to commercial-free music from every genre, live play-by-play sports, the biggest news and talk, and the hottest entertainment at your fingertips, 24/7.

Enjoy over 140 channels, including commercial-free music plus the best sports, news, talk, comedy and entertainment. SiriusXM signal coverage spans over 3.7 million square miles, coast to coast. No longer will you worry about losing radio reception...



Bluetooth V3.0 Hands-Free Calling

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.



Adaptive Fast Charging

We demand top performance of our mobile devices to meet our social media and content streaming needs. To keep up with rapidly changing design trends, our mobile devices tend to rely on limited energy capacity, utilizing every efficiency to prolong the charge of the battery. AptiX source units feature USB Adaptive Fast Charge technology, reducing necessary down time to get you moving again. AFC has the potential to recharge enabled mobile device batteries from zero to up to 50% in about 30 minutes. (USB cable not included)

NEW FOR
2017

INCITE SOURCE UNITS

PD-1032B

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 10.3" Touchscreen LCD



**2-DIN with 10.3"
Detachable LCD!**

DVD



USB



**AUX
INPUT**



Bluetooth®



**TOUCH
SCREEN**



**X300
WATT
4CH. AMPLIFIER**

PD-1032B Standard Features:



ISO 2-DIN Chassis, Universal Mounting Sleeve Included
10.3" 800*480 16:9 Aspect Ratio Widescreen LCD
Detachable Faceplate, Padded Carry Case Included
SmartSense Glass Panel Touch Screen Technology
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Microphone & External Microphone Included
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video

2A 5V Adaptive Fast Charge of Mobile Devices
ID3 MP3 Tag Reading for Track & Artist Information
3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

INCITE SOURCE UNITS

PDN-621HB - iGo GPS Navigation + Android PhoneLink + Standards
PD-621XB - SiriusXM Tuner Ready + Standards
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



 Screen Mirroring of Smart Devices					
DVD	 USB	 AUX INPUT	 TOUCH SCREEN		Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

- 621Series Standard Features:**

 - ISO 2-DIN Chassis, Universal Mounting Sleeve Included
 - 6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
 - Bluetooth V4.0 Hands-Free Calling from Enabled Phone
 - A2DP Wireless MP3 Audio Playback from Enabled Device
 - Built-in Microphone & External Microphone Included
 - Accepts OEM Steering Wheel Control Interfaces
 - Playback from DVD & CD of MP3, MP4 & Other Video
 - Playback from 64GB USB of MP3, MP4 & Other Video
 - 2A 5V Adaptive Fast Charge of Mobile Devices
- ID3 MP3 Tag Reading for Track & Artist Information
 - 3.5mm AUX Audio Input for Personal Media Devices
 - Rear Audio/Video Input for Personal Media Devices
 - Front & Rear RCA Pre-Amp Audio Outputs
 - Subwoofer RCA Pre-Amp Audio Output
 - Video Output for Auxiliary Devices
 - Rear View Camera Input w/ Trigger
 - 300w 4ch. MOSFET Speaker Outputs
 - Multi-Region FM Frequency Stepping
 - Remote Control Included

INCITE SOURCE UNITS






NEW FOR
2017

SiriusXM Tuner Ready + Standards - **PD-625XB**
Standard Features - **PD-625B**
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



SiriusXM
READY

Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

DVD	 USB	 AUX INPUT
 Bluetooth	 TOUCH SCREEN	



- 625 Series Standard Features:**

 - ISO 2-DIN Chassis, Universal Mounting Sleeve Included
 - 6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
 - Detachable Faceplate, Padded Carry Case Included
 - Bluetooth V4.0 Hands-Free Calling from Enabled Phone
 - A2DP Wireless MP3 Audio Playback from Enabled Device
 - Built-in Front Panel Bluetooth Microphone
 - Accepts OEM Steering Wheel Control Interfaces
 - Playback from DVD & CD of MP3, MP4 & Other Video
 - Playback from 64GB USB of MP3, MP4 & Other Video
 - 2A 5V Adaptive Fast Charge of Mobile Devices
- ID3 MP3 Tag Reading for Track & Artist Information
 - 3.5mm AUX Audio Input for Personal Media Devices
 - Rear Audio/Video Input for Personal Media Devices
 - Front & Rear RCA Pre-Amp Audio Outputs
 - Subwoofer RCA Pre-Amp Audio Output
 - Video Output for Auxiliary Devices
 - Rear View Camera Input w/ Trigger
 - 300w 4ch. MOSFET Speaker Outputs
 - Multi-Region FM Frequency Stepping
 - Remote Control Included

INCITE SOURCE UNITS

PDN-721HB - iGo GPS Navigation + Android PhoneLink + Standards
PD-721XB - SiriusXM Tuner Ready + Standards
PD-721B - Standard Features
ISO 1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 7" Touchscreen LCD



NEW FOR
2017



DVD

USB

AUX INPUT

TOUCH SCREEN

X300 WATT 4CH. AMPLIFIER




Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

721 Series Standard Features:
ISO 1-DIN Chassis, Universal Mounting Sleeve Included
7" 800*480 16:9 Aspect Ratio Widescreen LCD
Detachable Front Panel, Padded Carry Case Included
SmartSense Glass Panel Touch Screen Technology
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video

2A 5V Adaptive Fast Charge of Mobile Devices
ID3 MP3 Tag Reading for Track & Artist Information
3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

INCITE SOURCE UNITS

Standard Features - **PD-623B**
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



DVD

AUX INPUT




TOUCH SCREEN



NEW FOR
2017

PD-623B Standard Features:
ISO 2-DIN Chassis, Universal Mounting Sleeve Included
6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included



DVD

AUX INPUT

TOUCH SCREEN

Standard Features - **PD-348B**
1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth Connectivity, & Detachable 3.4" LCD



NEW FOR
2017

PD-348B Standard Features:
ISO 1-DIN Chassis, Universal Mounting Sleeve Included
3.2" 720*420 16:9 Aspect Ratio Widescreen LCD
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

MobileLink X2 AVN SOURCE UNITS

MobileLink X2 Source Units feature GPS turn-by-turn navigation for all 50 United States, powered by iGo Primo. Set your destination to one of nearly 17 million available points of interest, or your own unique location. Follow the on-screen directions or audible text-to-speech commands, including lane departure guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more! Map updates available from Naviextras.com.




MHL 2-Way Mobile High-Definition Link

PDN-626HB & PDN-726HB also include MHL MobileLink X2 mobile device integration, enabling complete control of your smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback.

Digital Signal Processing features include a digital 10-band equalizer with 14dB boost or cut, custom presets, & factory presets. Additional DSP functions include variable subwoofer level control, reverb optimization, loudness adjustment, & sound staging controls.

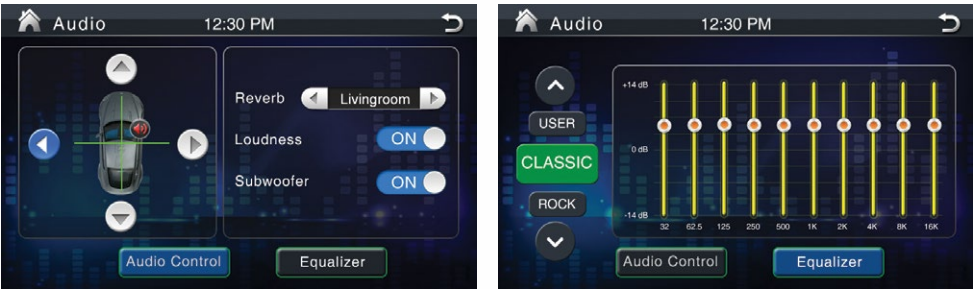

SERIES STANDARD FEATURES:

Turn-by-Turn GPS Navigation of USA, Canada, & Mexico
12 Million Points of Interest Database Included
Complete Integration of Select Android Enabled Devices
Bluetooth V3.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Microphone & External Microphone Included
Accepts OEM Steering Wheel Control Interfaces

Advanced FM/AM Tuner with RDS
Playback from DVD & CD of MP3 & MP4
Playback from 64GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track Information
AUX Audio Input for Personal Media Devices
10-Band Audio Equalizer w/ User Presets
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Pre-Amp Output

Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Custom Backgrounds & Screen Savers
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400NIT LED Backlight

MobileLink X2 AVN SOURCE UNITS

PDN-626B

2-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



PDN-726B

1-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ Motorized 7" LCD



MULTIMEDIA SOURCE UNITS




Bluetooth™

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lighting quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.





Customizing options include several preloaded background images & color changing graphic user interface. Select models include variable color front panel illumination. Choose a specific color to match your interior lighting scheme or random color change for a full color spectrum effect.

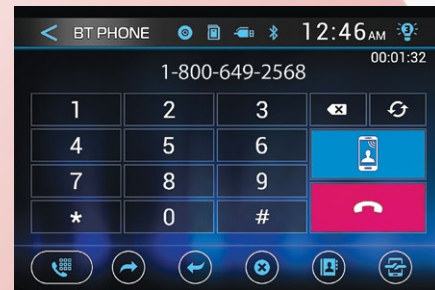

PD-624B

2-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ 6.2" LCD, & Bluetooth

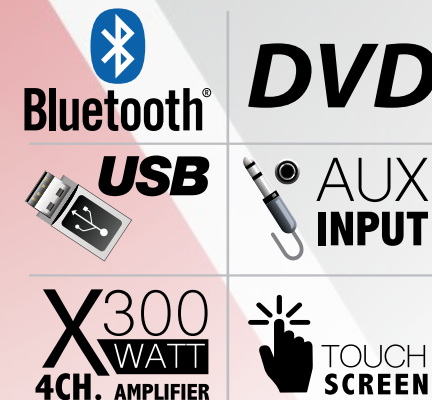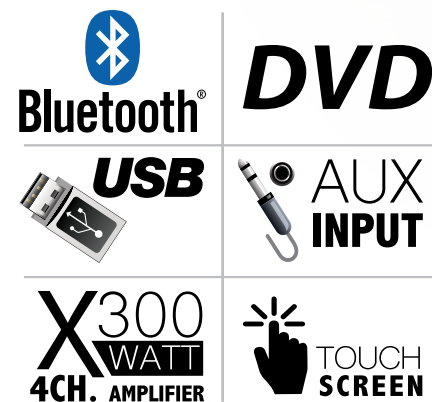

Series Standard Features:

Bluetooth V3.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Phone
Accepts OEM Steering Wheel Control Interfaces
Custom Backgrounds & RGB Color Changing GUI
Advanced FM/AM Tuner with RDBS Receiver
Playback from DVD & CD of MP3 & MP4

MULTIMEDIA SOURCE UNITS

PD-724B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ Motorized 7" LCD, & Bluetooth



PD-454B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 4.5" LCD & Bluetooth



Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Information
AUX Audio Input for Personal Media Devices
RCA A/V Input for Auxiliary Sources
4-Band Audio Equalizer w/ User Presets
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Low Pass Crossover

Variable Subwoofer Pre-Amp Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400NIT LED Backlight

MULTIMEDIA SOURCE UNITS

PD-651B
2-DIN Multimedia Source Unit w/ 6.5" LCD Touch Screen w/ Bluetooth



Bluetooth®	DVD
USB	AUX INPUT
X300WATT 4CH. AMPLIFIER	TOUCH SCREEN

PTID-8920B
1-DIN Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen w/ Bluetooth



Bluetooth®	DVD
USB	AUX INPUT
X300WATT 4CH. AMPLIFIER	TOUCH SCREEN

ADDITIONAL SERIES DETAILS:
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Accepts OEM Steering Wheel Control Interface
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs

MULTIMEDIA SOURCE UNITS

PD-710B (w/ Bluetooth V2.0)
1-DIN Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



Bluetooth®	DVD
USB	AUX INPUT
X300WATT 4CH. AMPLIFIER	TOUCH SCREEN

PADVD-390
1-DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 &
Playback from 32GB USB of MP4, &
In-Dash, Floor, & Vertical Mounting Brackets Included
DIN Size Trim Ring For In-Dash Mounting Included
Flash Memory for Last Position Recall
Remote Control & IR Repeater Included
OSD On Screen Display
Digital Anti-shock
A/V Pre-amp Outputs, 2V
Dimensions: 6.4" x 6.2" x 2"



DVD **USB**

Subwoofer Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT LED Brightness

CD AUDIO SOURCE UNITS

PCD-52B

2-DIN CD/MP3, AM/FM Receiver w/ SD/USB Playback w/ Bluetooth



Bluetooth®



SD



USB



AUX
INPUT



X300
WATT
4CH. AMPLIFIER



ADDITIONAL SERIES DETAILS:

Bluetooth V2.0 Hands Free Calling from Enabled Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
AUX Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output

300w 4ch MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Theft Deterrent detachable face (1-Din Only)
Faceplate Carry Case Included

DIGITAL AUDIO SOURCE UNITS

PL-52B

2-DIN Digital Media Receiver w/ SD/USB Playback & AM/FM Receiver w/ Bluetooth



Bluetooth®



SD



USB



AUX
INPUT



X300
WATT
4CH. AMPLIFIER



ADDITIONAL SERIES DETAILS:

Bluetooth V3.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX Audio Input for Personal Media Devices
Front & Rear Pre-Amp RCA Outputs

Subwoofer Pre-Amp RCA Output
300w 4ch. MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Remote Control Included
Theft Deterrent detachable face (1-Din Only)
Multi-Region FM Frequency Stepping

PCD-51B

(w/ Bluetooth V2.0)
1-DIN CD/MP3 Player, AM/FM Receiver w/ SD/USB Playback





Bluetooth®



SD



USB




AUX
INPUT




X300
WATT
4CH. AMPLIFIER

PL-51B


Detachable (w/ Bluetooth V2.0)
1-DIN Digital Media Receiver w/ SD/USB Playback & AM/FM Receiver




Bluetooth®




SD



USB



AUX
INPUT



X300
WATT
4CH. AMPLIFIER



OVERHEAD ENTERTAINMENT

PMD-143H

Ceiling Mount DVD Entertainment System w/
High Definition 14.3" LCD & MHL MobileLink Input

**MobileLink Mirrors the Image of Your Smart-
phone Or Tablet To The Ceiling Monitor via HDM-
A3 Interface Cable (sold separate). Powered by MHL.**

Interchangeable Color Skins (beige, black, grey)
Car-Spec DVD Drive for Extreme Temperature Exposure
MHL MobileLink Input for Smart Device Connectivity
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Flash Memory for Last Position Recall
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
RCA A/V Input for Auxiliary Sources
RCA A/V Output for Multiple Component Integration
Triggered Bright White LED Dome Light
NTSC / PAL Auto Selection
1,366 x 768 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 16"w x 7.5"d x 2"h



DVD



FM
Transmitter



HDM-A3 - MHL MobileLink Smartphone Mirroring Interface Cable
for Select Andriod Devices

HDM-i4 - MHL MobileLink Smartphone Mirroring Interface Cable
For Select iOS Devices

5ft interface cable unlocks 1080p video and audio playback from enabled mobile
devices. Each interface cable features the appropriate micro connector for your mobile
device. Power Acoustik MobileLink Interface cables also charge your mobile device.
Available for select Android and iOS devices.

PMD-112 - w/ DVD

PT-110CM - A/V Only

Ceiling Mount Entertainment System w/ 11.2" LCD

Interchangeable Color Skins (beige, black, grey)
45°/45° Swivel Screen for Angled Viewing
Car-Spec DVS DVD Drive for Extreme Temperature Exposure
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Flash Memory for Last Position Recall
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
A/V Input for Auxiliary Sources
Rear Panel RCA A/V Input for Game Console
A/V Output for Multiple Component Integration
Rear Panel Play/Pause Control
Triggered Bright White LED Dome Light
Full Function Remote Control Included
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 14"w x 12.5"d x 2.5"h



DVD



FM
Transmitter

OVERHEAD ENTERTAINMENT

PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD

10.3" High Resolution LCD Screen
1,024 x 600 16:9 Widescreen Resolution
Interchangeable Color Skins (beige, black, grey)
Automotive-Spec DVD Transport for Extreme Conditions
Playback from DVDR/RW of MP4 & AVI
Playback from 32GB SD/MMC or USB of 1080p MP4, AVI, or
RCA A/V Input from Auxiliary Sources
Rear Panel RCA A/V Input from Game Console
Pre-Amp Audio Outputs
Single Channel Wireless IR Transmitter (use HP-10S or HP-11S)
330 Ch. FM Stereo Transmitter for OEM Integration
Full Function Remote Control Included
NTSC / PAL Auto Selection
400 NIT Screen Brightness
Dimensions: 13"w x 11"d x 2.5"h



DVD



PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD

Interchangeable Color Skins (beige, black, grey)
45°/270° Swivel Screen for Angled Viewing
Playback from DVDR/RW of 720p MP4
Playback from 32GB USB of 720p MP4
Flash Memory for Last Position Recall
FM Stereo Transmitter for OEM Integration
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
A/V Output for Multiple Component Integration
A/V Inputs for Auxiliary Sources
Rear Panel RCA A/V Input for Game Console
Rear Panel Play/Pause Control
Triggered Bright White LED Dome Light
Full Function Remote Control Included
NTSC / PAL Auto Selection
1,024x600 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11.5"w x 11"d x 2.5"h



DVD



PMD-90

Ceiling Mount DVD Entertainment System w/ 9" LCD

Interchangeable Color Skins (beige, black, grey)
45°/45° Swivel Screen for Angled Viewing
Playback from DVDR/RW of 720p MP4 & Other Video Formats
Playback from 32GB SD/USB of 720p MP4 & Other Video Formats
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
A/V Input for Auxiliary Sources
A/V Output for Multiple Component Integration
Triggered Bright White LED Dome Light
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11"w x 9.75"d x 2.5"h



DVD



FM
Transmitter



REAR SEAT ENTERTAINMENT

- HDVD-94T** - Universal Replacement Headrest w/ DVD Player & 9" Touchscreen LCD
- HDVD-94** - Universal Replacement Headrest w/ DVD Player & 9" LCD
- H-94** - Universal Replacement Headrest w/ 9" LCD

REAR SEAT ENTERTAINMENT

- HDVD-91CC**
Universal Replacement Headrest w/ DVD Player & 9" LCD
- H-91CC**
Universal Replacement Headrest w/ 9" LCD
- HDVD-71CC**
Universal Replacement Headrest w/ DVD Player & 7" LCD
- H-71CC**
Universal Replacement Headrest w/ 7" LCD



ADDITIONAL SERIES DETAILS:
 Forward/Backwards Tilting Headrest w/ 9" Touchscreen LCD
 3 Changeable Color Skins Included (grey, beige, black)
 Playback from DVDR/RW of 720p MP4 (HDVD only)
 Playback from 32GB SD Card or USB of MP4 (HDVD only)
 Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)
 FM Stereo Transmitter for OEM Integration (HDVD only)
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11.5"w x 8.5"h x 5"d


ADDITIONAL SERIES DETAILS:
 Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Playback from DVDR/RW of 720p MP4 (HDVD only)
 Playback from 32GB SD Card or USB of MP4 (HDVD only)
 Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)
 FM Stereo Transmitter for OEM Integration (HDVD only)
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11.5"w x 8.5"h x 6"d (91CC)
 Dimensions: 10"w x 7"h x 5.5"d (71CC)

REAR SEAT ENTERTAINMENT

PHD-101 Universal Headrest Mount DVD Player w/ 10.3" LCD

NEW FOR
2017

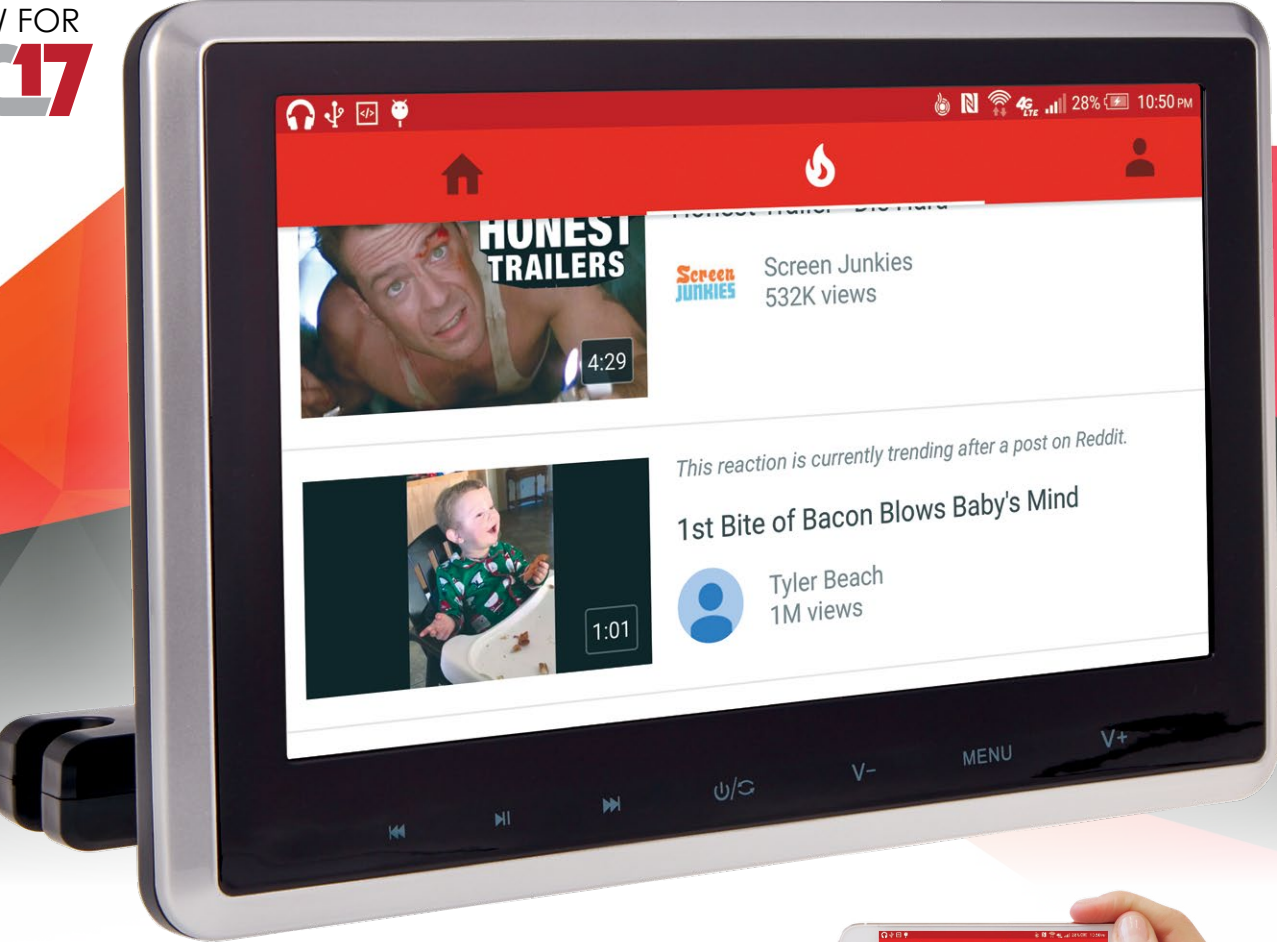

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest
Rear Loading DVD Player for DVD/RW 720P Playback
MHL MobileLink Input for Smart Device Connectivity
32GB USB & SD Card Readers for MP4 Playback
Single Channel Wireless IR Transmitter (use HP-11S)
FM Stereo Transmitter for Easy OEM Integration
AUX A/V Input for Game Console or Personal Media Devices
RCA A/V Input for Auxiliary Source or Opposite Headrest
RCA A/V Output to Auxiliary Source or Opposite Headrest
3.5mm Hardwired Headphone Output Jack
4.75"-8.25" Pole Width Adjustment
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness



HDM-A3 - MHL MobileLink Smartphone Mirroring Interface Cable
for Select Andriod Devices
HDM-i4 - MHL MobileLink Smartphone Mirroring Interface Cable
For Select iOS Devices

5ft interface cable unlocks 1080p video and audio playback from enabled mobile devices. Each interface cable features the appropriate micro connector for your mobile device. Power Acoustik MobileLink Interface cables also charge your mobile device. Available for select Android and iOS devices.



PHAD-7 Universal Headrest Mount DVD Player w/ 7" LCD

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest
Front Loading DVD Player for DVD/RW 720P Playback
32GB USB & SD Card Readers for MP4 Playback
Dual Channel Wireless IR Transmitter (use HP-12S)
FM Stereo Transmitter for Easy OEM Integration
AUX A/V Input for Game Console or Personal Media Devices
RCA A/V Input for Auxiliary Source or Opposite Headrest
RCA A/V Output to Auxiliary Source or Opposite Headrest
3.5mm Hardwired Headphone Output Jack
3 Changeable Colors Skins Included (grey, beige, & black)
4.75"-8.25" Pole Width Adjustment
Various Pole Diameter Adapters Included
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness



PT-712IRA 7" Dual Channel IR Headrest Monitor

Two Auxiliary A/V Input
Dual Channel IR Transmitter
Wired Headphone Output
Low Reflection TFT-LCD Monitor
Ultra Bright LED Backlighting
Selectable Aspect Modes

Preset/Manual Image Control
Dimmer Control
Remote Control
NTSC/PAL Selection
480 x 234 (16:9) Image Resolution
Cutout Dimensions: 7" w x 4.75" h x .75" d



PT-700MHR 7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor
Ultra Bright LED Backlighting
Ignition Power On/Off Optional
Single Video Input
Selectable Aspect Modes
Preset/Manual Image Control
NTSC/PAL Selection

Sculptured Trim Ring Included
Remote Control Included
480 x 234 (16:9) Image Resolution
400NIT Panel Brightness
Cutout Dimension: 7" w x 4.5" h x 1" d





WIRELESS HEADPHONES

- HIR-1W** - Single 1ch. IR Headphone - White
- HIR-1B** - Single 1ch. IR Headphone - Black
- HIR-2W** - Single 2ch. IR Headphone - White
- HIR-2B** - Single 2ch. IR Headphone - Black

Single 1ch or 2ch Infrared Headphone
Available in Graphite Black or Snow White
Independently Swiveling Ear Cup
Ear Cup Fold Flat for Convenient Storage
Soft Comfortable Faux Leather Ear Pad
Adjustable Headband w/ Silicone Headliner
Built-in Momentary Mute Switch
25ft Maximum Operational Range

Auto Off Timer Increases Battery Life
40mm Mylar Extended Frequency Driver
Variable Volume Level Control
Soft Touch Cinch Carry Bag Included
Requires 2 AAA Batteries (included)
Ch. 1: L 2.3mHz, R 2.8mHz
Ch. 2: L 3.2mHz, R 3.8mHz

HP-10S Single 1ch. IR Headphone

EVA hard carrying case included
Foldable Ear Pads for Compact Storage
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps
Channel Selectable From Each Headphone
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



WLHP-100 Single 1ch. IR Headphone

WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps
Single Channel UHF IR Receiver
ON/OFF Switch Saves Battery Life
Variable Volume Control
ALC Auto Level Control
Auto Off and Auto Mute



HP-11S Single 1ch. IR Headphone

HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage
Adjustable Headphone Straps
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-900S Single 2ch. 900MHz Headphone

HP-902RFT Pair 2ch. 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs
Channel Selectable From Each Headphone
100ft. Operational Distance
Adjustable Headphone Straps
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



EFM-02

PLL FM Modulator

PLL Phase Lock Loop Tuner Outputs
Frequency Settings Via Slide Switch
Ground Loop Isolator Circuit
Shielded Metal Housing For Noise Rejection



VB-1

One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls
Shielded Metal Housing For Noise Rejection
4 Video Output Gain control



REAR VIEW CAMERAS

LP-2CSB - Full Frame

L-3CSB - Partial Frame

License Plate Mount Night Vision Camera w/ Back-Up Sensors,
On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2
Object Sensors w/ Proximity Alert
1/4" CCD Color Camera
0.5 LUX Low Light Lens
Waterproof Camera Housing
Waterproof External Wire Connections
Vertically Pivoting Camera Housing
7' Effective Viewing Distance
Inconspicuous Speaker for Alerts
8 IR LEDs for Night Viewing
On-Screen Distance Gauge
130° Capture Angle
RCA Video Output
Cast Steel Alloy Frame
Reversed Image
640 x 480 Resolution



L-3CSB



CAM-4LF - Full Frame


CAM-3L - Partial Frame

Black Chrome License Plate Mount Rear View Camera

Zinc Alloy Metal License Plate Frame
Vertically Pivoting Camera Housing
On-Screen Distance Gauge
1/4" CCD Wide View Color Camera
0.1 LUX Low Light Lens
163° Capture Angle
RCA Video Output
Reversed Image
648 x 488 Resolution



CAM-3L

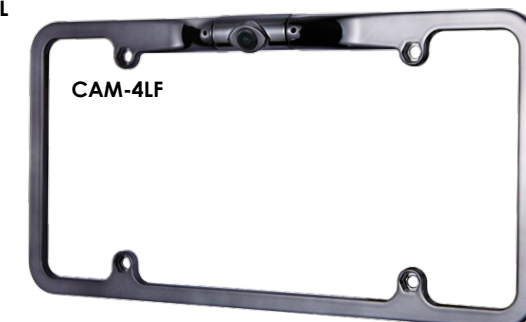

CAM-4LF

CAM-2 - Surface Mount

CAM-1 - Under Trunk Lid Rear View Camera

Waterproof Zinc Camera Housing
On-Screen Distance Gauge
1/4" CCD Color Camera
0.1 Lux Low Light Lens
163° Capture Angle
RCA Video Outputs
Reversed Image
648 x 488 Resolution



Vertically Pivoting Mounting Bracket



CAM-1

Threaded Under Trunk Lid Mounting



Class A/B Full Range & Class D Monoblock Amplifiers
2-ohm Stereo & 4-ohm Bridged Full Range Operation
1-ohm Stable Monoblock Operation for MAX Power
Bridge 2 Monoblocks Together for Double Power!
Die-Cast Aluminum Alloy Heatsink for Optimum Dissipation
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors
Military Grade SMT PCB Maintains Dynamic Performance
Direct Short, Thermal, & Overload Circuits Protect Amplifier
Easy DIY Install Single Sided Terminals & Controls
Angled Wire Terminals Secure Wire Connections
Chassis Integrated Aluminum Mounting Points
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
200mV-6V Low Level RCA Inputs
4g Power Wire & 8g Speaker Wire Outputs
12dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Octave Dynamics (monoblock)
Dash Mount Gain Control Module Included (select models)

Class A/B	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Full Range	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.25"h x 8.5"w)	Included
BAMF4-1200	1,200w	2 x 300	4 x 150	4 x 75	11.25"	-
BAMF4-1800	1,800w	2 x 450	4 x 225	4 x 110	13.25"	-
BAMF5-2500	2,500w	2 x 200+ 1 x 850 (2Ω)	4 x 100 + 1 x 850	4 x 50 + 1 x 425	17"	Included
BAMF1-3000D	3,000w	1 x 1,500 (1Ω)	1 x 1,000	1 x 700	11.25"	Included
BAMF1-5000D	5,000w	1 x 2,500 (1Ω)	1 x 1,700	1 x 1,100	13.25"	Included
BAMF1-8000D	8,000w	1 x 4,000 (1Ω)	1 x 2,700	1 x 1,800	17"	Included



New for 2016, Edge amplifiers are the next step in performance and value. Taking advantage of our tried and true class A/B full range and improved efficiency class d monoblock platforms, Edge amplifiers continue down the road of reliability and longevity you know well. Satin silver chassis, engraving, and accents teetering on the edges bring a high end appeal to traditional performance.

Class A/B Full Range & Class D Monoblock Amplifiers
2-ohm Stereo & 4-ohm Bridged Full Range Operation
1-ohm Stable Monoblock Operation for MAX Power
Bridge 2 Monoblocks Together for Double Power!
Military Grade PCB w/ PWM MOSFET Power Supply
Direct Short, Thermal, & Overload Circuit Protection
High/Speaker Level & Low Level/RCA Input
200mV-6V Low Level RCA Input
Pre-Amp Low-Level RCA Outputs (select models)
4g Power Wire & 8g Speaker Wire Outputs
Variable 12dB High & Low Pass Crossovers
12dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Octave Dynamics (monoblock)
Dash Mount Remote Control Included (select models)



Dash Mount Gain Control Included

Edge	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Amplifiers	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.25"h x 9"w)	Included
EG2-1400	1,400w	1 x 700	2 x 350	2 x 175	12.75"	-
EG4-1000	1,000w	2 x 250	4 x 125	4 x 65	10.25"	-
EG4-1500	1,500w	2 x 370	4 x 185	4 x 95	12.75"	-
EG5-2800	2,800w	2 x 320 + 1 x 760 2Ω	4 x 160 + 1 x 760	4 x 80 + 1 x 380	19.75"	Included
EG1-2500D	2,500w	1,250 x 1 (1Ω)	800 x 1	400 x 1	10"	Included
EG1-4500D	4,500w	2,250 x 1 (1Ω)	1,500 x 1	750 x 1	13"	Included
EG1-7000D	7,000w	3,500 x 1 (1Ω)	2,300 x 1	1,100 x 1	16.25"	Included
EG1-10000D	10,000w	5,000 x 1 (0.5Ω)	3,300 x 1 (1Ω)	1,600 x 1 (2Ω)	20.50"	Included

RAZOR

AMPLIFIERS

AMPLIFIERS

CALIBER

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...



Dash Mount Gain Control Included

- Compact 4.75" Chassis Design for Installation Versatility
- MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
- Military Grade SMT PCB Maintains Dynamic Performance
- 2-ohm Stereo & 4-ohm Bridged Full Range Operation
- 2-ohm Minimum Impedance Stability (monoblocks)
- Direct Short, Thermal, & Overload Circuits Protect Amplifier
- 200mv-6V Low Level RCA Inputs
- High Level Input w/ Signal Sense Auto Turn-on
- Variable 12dB High Pass & Low Pass Crossovers
- 10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
- 12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
- Dash Mount Gain Control Module Included (select models)

Installs in Virtually ANY Location!
90% Efficient Full Range Class D Technology



RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control
RZ2-1300D	1,300	1 x 540	2 x 270	2 x 185	5.5"	Included
RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
RZ4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
RZ5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
RZ1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included



NEW FOR
2017




Dash Mount Gain Control Included

- Class A/B Full Range & Class D Monoblock Amplifiers
- 2-ohm Stereo & 4-ohm Bridged Full Range Operation
- 1-ohm Stable Monoblock Operation for MAX Power
- Bridge 2 Monoblocks Together for Double Power!
- Military Grade PCB w/ PWM MOSFET Power Supply
- Direct Short, Thermal, & Overload Circuit Protection
- High/Speaker Level & Low Level/RCA Input
- 200mV-6V Low Level RCA Input

- Pre-Amp Low-Level RCA Outputs (select models)
- 4g Power Wire & 8g Speaker Wire Outputs
- Variable 12dB High & Low Pass Crossovers
- 12dB Bass Boost Increases Low Octave Harmonics
- 180° Phase Shift Improves Low Octave Dynamics (monoblock)
- Dash Mount Remote Control Included (select models)

CALIBER AMPLIFIERS	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.50" w x 2" h)	Gain Control
CB4-1200	1,200	2 x 300	4 x 150	4 x 120	13"	-
CB4-1800	1,800	2 x 450	4 x 225	4 x 180	15.25"	-
CB1-2500D	2,500	1 x 1,250 (1Ω)	1 x 850	1 x 500	12"	Included
CB1-4500D	4,500	1 x 2,200 (1Ω)	1 x 1,500	1 x 900	13.25"	Included
CB1-8000D	8,000	1 x 4,000 (1Ω)	1 x 2,500	1 x 1,500	18"	Included



SUBWOOFER

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

NEW FOR
2017



Pre-Assembled Re-cone Kit Available

Overcompensating Motor Structure for Increased Magnetic Strength
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power

High-Temperature Tolerance Adhesives Resist Thermal Failure
Nickel Plated 8ga Spring-Loaded Compression Wire Terminals
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
High Density Polyether Foam Surround w/ UV & Chemical Protection
Dual Poly-Cotton Suspension Dampen Violent Accelerations
Stitched Voice Coil Leads Prevent Potential Damage
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

MOFO Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
MOFO-104X	2,400	1,200	83.48	2.50" Dual 4Ω	288oz.	6.125"	0.75	1.25
MOFO-102X	2,400	1,200	83.62	2.50" Dual 2Ω	288oz.	6.125"	0.75	1.25
MOFO-124X	2,700	1,500	85.40	2.50" Dual 4Ω	373oz.	6.875"	1.00	2.00
MOFO-122X	2,700	1,500	85.37	2.50" Dual 2Ω	373oz.	6.875"	1.00	2.00
MOFO-154X	3,000	1,700	86.97	2.50" Dual 4Ω	373oz.	8.125"	2.00	4.00
MOFO-152X	3,000	1,700	86.90	2.50" Dual 2Ω	373oz.	8.125"	2.00	4.00



SUBWOOFER

NEW FOR
2017

BAMF subwoofers are the newest secret weapon for you bass BURP fanatics! These beasts are engineered for the most extreme conditions. Massive 3" 4-layer voice coils built on an aluminum former can take the heat. Freakishly oversized motor structures provide more magnetic inertia than is ever necessary for a woofer. Spruce tree pulp cones, high density extended excursion foam surround, and hybrid suspension dampers work together to contain the momentum to a shattering roar...



Overcompensating Motor Sturcture for Increased Magnetic Strength
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
3" 4-Layer Voice Coil w/ Direct Connect Wire Increases Power Handling

High-Temperature Tolerance Adhesives Resist Thermal Failure
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
Sitched and Glued Surround/Cone Joints for Strongest Bonding
Extended Excursion Polyether Foam Surround w/ UV Protection
Dual Poly-Cotton Suspension Dampen Violent Accelerations
Stitched Voice Coil Leads Prevent Potential Damage
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

BAMF Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
BAMF-104	3,200w	1,600w	83.50	3" Dual 4Ω	272oz.	6.00"	0.75	1.25
BAMF-102	3,200w	1,600w	83.80	3" Dual 2Ω	272oz.	6.00"	0.75	1.25
BAMF-124	3,500w	1,750w	84.60	3" Dual 4Ω	272oz.	6.75"	1.00	2.00
BAMF-122	3,500w	1,750w	85.00	3" Dual 2Ω	272oz.	6.75"	1.00	2.00
BAMF-154	3,800w	1,900w	86.40	3" Dual 4Ω	272oz.	8.00"	2.00	4.00
BAMF-152	3,800w	1,900w	86.10	3" Dual 2Ω	272oz.	8.00"	2.00	4.00

mofo SUBWOOFER Type S

MOFO Type S subwoofers are engineered to offer all the reliable performance qualities you expect of the original MOFO. Of course a new generation MOFO wouldn't be without including the proven benefits and characteristics of the original; aluminum alloy voice coil heatsink dust cap, 2.5" dual voice coil, dual damper suspension, high density reinforced paper cone, etc. Everything you expect from MOFO. What makes Type S MOFO different than the original? One of the two mods to Type S should be easy to spot. Type S uses formed steel framework, while the original uses a more expensive aluminum frame to support its overcompensating motor structure. The second mod to Type S is a motor structure that's been optimized for an efficient use of its magnetic strength. Strategically targeting all the motor structures power gives Type S MOFO the dynamic sound & performance qualities of its big brother, without the need of unnecessarily massive magnets. These improvements to MOFO Type S reduces material cost while maintaining the design & performance characteristics you want of the original.

NEW FOR
2017



Overcompensating Motor Sturcture for Increased Magnetic Strength
10 mm T-Yoke & Top Plate Improve Low Frequency Dynamics
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power
High-Temperature Tollerance Adhesives Resist Thermal Failure

Nickel Plated 8ga Spring-Loaed Compression Wire Terminals
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
High Density Polyether Foam Surround w/ UV & Chemical Protection
Dual Poly-Cotton Suspension Dampen Violent Accelerations
Stitched Voice Coil Leads Prevent Potential Damage
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
MOFOS-10D4	2,200	1,100	82.60	2.50" Dual 4Ω	204oz.	6.00"	0.75	1.75
MOFOS-10D2	2,200	1,100	83.00	2.50" Dual 2Ω	204oz.	6.00"	0.75	1.75
MOFOS-12D4	2,500	1,200	86.50	2.50" Dual 4Ω	254oz.	6.50"	1.25	2.50
MOFOS-12D2	2,500	1,200	86.40	2.50" Dual 2Ω	254oz.	7.50"	1.25	2.50

GOTHIC SUBWOOFER

Overcompensating Motor Sturcture for Increased Magnetic Strength
10mm T-Yoke & Top Plate Improve Low Frequency Dynamics
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
2.50" 4-Layer Voice Coil w/ Nickel Plated 8ga Spring-Loaded Terminals
High-Temperature Tollerance Adhesives Resist Thermal Failure
Composite Spruce Pulp Cone w/ Twisted Woven Flax Fiber
Sitched and Glued Surround/Cone Joints for Strongest Bonding
Extended Excursion NBR Rubber Surround w/ UV Protection
Poly-Cotton Suspension Dampen Violent Accelerations
Stitched Voice Coil Leads Prevent Potential Damage
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included



Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
GW3-10	2,200	1,000	81.30	2.50" Dual 2Ω	204oz.	6.00"	1.00	1.50
GW3-12	2,500	1,200	83.60	2.50" Dual 2Ω	254oz.	6.50"	1.50	2.25
GW3-15	3,000	1,400	84.00	2.50" Dual 2Ω	254oz.	7.50"	2.75	3.25



EDGE SHALLOW SUBWOOFER

NEW FOR
2017

EDGE Shallow Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
EW-104S	1,400	700	81.30	2.00" 4Ω	60oz.	2.50"	0.75	-
EW-124S	1,200	600	83.60	2.00" 4Ω	60oz.	2.50"	1.00	-



THIN SUBWOOFER ENCLOSURE

THIN-120BXA Powered Enclosure

Pre-loaded Enclosure w/ 12" Subwoofer
4 Ohm Impedance
650W Built in Amp
Carpeted Black w/ Embroidered Accents
29.75"l x 14.5" h x 5.75"/2.25"d



EF-60C

6.5" Component System

500w Max Power Handling
Improved Efficiency Diaphragm & Magnet Structure
Carbon Fiber Injection Molded Polypropylene Cone
Treated Woven Cloth Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
1" Flush Mount Dome Tweeter
Passive Crossover Included
Speaker Grill Included
Freq-Response: 70-20kHz
Sensitivity: 93dB
Mounting Depth: 2.5"



EF-694

EF-653

EF-52

EF-42

EF-573

Improved Efficiency Diaphragm & Magnet Structure
Carbon Fiber Injection Molded Polypropylene Cone
Treated Woven Cloth Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
2" Balanced Dome Mylar Midrange (EF-694)
1" Balanced Dome Mylar Tweeter
1/2" Dome Super Tweeter (select models)

Edge Speakers	Size & Type	MAX Power	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
EF-60C	6.5" Component	500w	65-20kHz	92dB	1.75"
EF-694	6"x9" 4-way	800w	45-20kHz	93dB	3.25"
EF-573	5" x 7" 3-way	500w	65-20kHz	92dB	1.75"
EF-653	6.5" 3-way	400w	65-20kHz	92dB	1.75"
EF-52	5.25" 2-way	300w	80-20kHz	90dB	2.125"
EF-42	4" 2-way	250w	100-20kHz	90dB	1.75"

NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount
SPL 97 dB
Built in Crossover



NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount/Flush Mount
SPL 97 dB
Built in Crossover



NB-4 4-Way Mount Tweeter 250 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Swivel/Surface/Angle Mount/Flush Mount
Polypropylene Diaphragm
Built in Crossover
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
SPL 97 dB



NX-5 Bullet Tweeter 200 Watts MAX

1" Horn Loaded Bullet tweeter
Machined Aluminum Chassis
Titanium Dome Diaphragm
1" High Temperature Voice Coil
Acrylic Phase Plug

High Strength Neodymium Magnet
Freq. Resp 3kHz-20kHz
Impedance: 3 ohm
Efficiency: 109dB
Sold in pairs



XPS-104 4" Midrange

300 watts max
.75" Voice Coil
Freq. Resp. 450 Hz. to 10kHz.
15 oz. Magnet
Imp. 4 Ohm
SPL 92 dB
Mounting Depth: 1.75"
Sold Individually



PROFESSIONAL AUDIO
Midrange Speakers



MID-80



MID-65

Pro Audio Mid-Range	Size & Type	MAX Power	Impedance	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
MID-65	6.5"	300w	4Ω	150-15kHz	96dB	2.75"
MID-80	8"	350w	4Ω	1202-8kHz	98dB	3.25"

Amplifier Wire Kits

AK-0 0g Amplifier Wire Kit w/ 200A ANL Fuse

AK-4 4ga Amplifier Wire Kit w/ 120A MANL Fuse

AK-8 8ga Amplifier Wire Kit w/ 80A MANL Fuse

Each Wire Kit Includes:

17ft Power Wire w/ Ring Terminal
3ft Ground Wire w/ Ring Terminal
17ft Twisted Pair RCA Interconnect
17ft Remote Turn-on Wire
25ft 16g Split Speaker Wire
Full Size MANL Fuse Holder
ANL or MANL Fuse Included
Assorted Installation Accessories



CAPACITORS


PC1.5F 1.5 Farad Power Capacitor

Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Brushed Aluminum Finish



PC2.0F 2 Farad Power Capacitor

12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Chrome Plated Finish

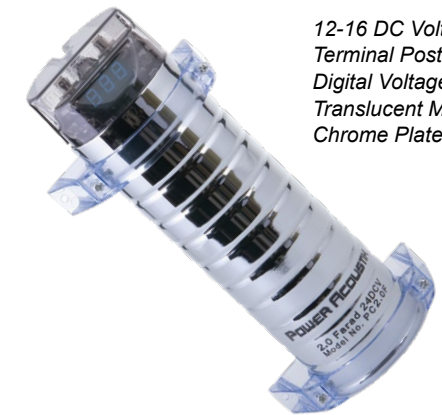

PCX-3F 3 Farad Power Capacitor


PCX-5F 5 Farad Power Capacitor

12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents



PCX-30F 30 Farad Hybrid Power Capacitor

12-16 DC Volts Operation
Internally Stacked Carbon-Foil Capacitors
Direct Connect 0 ga. Terminals & 4 ga. Reducers
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents

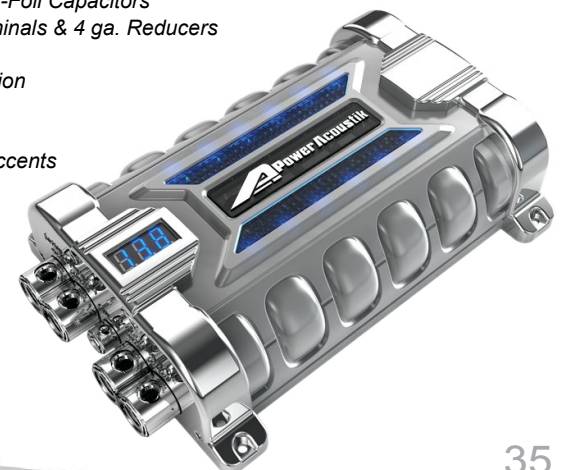

EQUALIZERS

PWM-70 7-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Selectable Input Sensitivity
- 7 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Selectable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- S/N Ratio 110dB @1V
- THD:0.05%



PWM-20 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 Variable Frequency Bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 115dB @1V
- THD:0.05%



PWM-19 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Selectable Green/Amber Illumination
- Quick Disconnect Wire Harness
- Under Dash Mounting Hardware Included
- S/N Ratio 110dB @5V
- THD:0.05%



PWM-16 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs & Front Panel AUX Input
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 80dB @5V
- THD:0.05%



BASSPROCESSOR

BASS-15C Bass Maximizer

- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB

NEW FOR
2017



BASS-12C Bass Maximizer

- Chrome Finish w/ Illuminated Badge
- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- 35-80Hz Variable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB



BASS-10C Bass Maximizer

- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB



C-30XR 3-Way 12dB Electronic Crossover

- 6-Channel Low-Level Input
- 6-Channel Low-Level Output w/ 5V Gain
- 2/4 Channel Input Selection
- Independent Front/Rear High Pass
- Independent Subwoofer Low Pass
- Stereo or Mono Subwoofer Output Selection
- 180° Phase Switch
- Variable Frequency & Gain Bass Boost
- Dash Mount Remote Subwoofer Gain Module
- S/N Ratio: 95dB
- Channel Separation: 60dB



MARINE AUDIO

MCD-51B (w/ Bluetooth V2.0) 1-DIN Marine CD Player w/32GB USB Playback



CD/MP3, AM/FM & USB Receiver
Conformal Coated PCB and Faceplate
Theft Deterrent Detachable Faceplate
Bluetooth V2.0 Hands Free Calling from Smart Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Faceplate Carry Case Included

RAZOR MARINE AMPLIFIERS

Compact 4.75" Chassis Design for Installation Versatility
Splash Resistant Conformal Coated Circuit Boards
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class D Monoblock Operation
Direct Short, Thermal, & Overload Circuits Protect Amplifier
200mv-6V Low Level RCA Inputs
High Level Input w/ Signal Sense Auto Turn-on
Variable 12dB High Pass & Low Pass Crossovers
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
Dash Mount Gain Control Module Included (select models)



RAZOR	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
CLASS D	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(4.75"w x 1.625"h)	Included
MA4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
MA5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
MA1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
MA1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included

ATV-6 All-Terrain Vehicle Audio System



Rugged All Element Ready ABS Construction
400w MAX Power Class A/B Audio Amplifier
Conformal Coated PCB and Waterproof Connections
Handlebar Mount Remote Control w/ AUX Input Included
Marine Grade Waterproof 6.5" Coaxial Speaker
1" Extended Frequency Range Titanium Dome Tweeter
RGB LED Light Rings Built-in, Remote Control Included
Bluetooth V3.0 MP3 Audio Streaming from Mobile Phone
3.5mm Aux Audio Input for Personal Media Devices
Heavy Duty Mounting Hardware Included



MARINE AUDIO



100% Waterproof Enclosure and Speaker System
High Density ABS Construction w/ UV Coating
Steel reinforced Mounting Bracket fits most towers
Braided Stainless Steel Safety Cable Included
Stainless Steel Mounting Hardware Included
Polypropylene speaker cone and Titanium Tweeter
Quick Disconnect Compression Terminals
Meets ROHS and CE Certifications
4-ohm System Impedance

Wake Tower Speakers	Size & Color	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (HxWxL)
MWT-65W	6.5" White	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-65T	6.5" Titanium	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-80W	8" White	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"
MWT-80T	8" Titanium	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"



MARINE WATERPROOF SPEAKERS

Marine Speakers	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (WxHxL)
MF-65WT	300w	150w	60-20kHz	91dB	7.5" x 7.5" x 2.5"

Marine Grade Waterproof 6.5" Coaxial Speaker
High Density ABS Construction w/ UV Coating
100% Waterproof Sealed Back Speaker Frame
Stainless Steel Mounting Hardware Included
Injection Molded Polypropylene speaker cone
Rubber Surround & Tweeter Pole Gasket
1" Titanium Dome Tweeter
White and Titanium Grills Included
Quick Disconnect Terminals
Meets ROHS and CE Certifications
4-ohm System Impedance

MARINE WATERPROOF SUBWOOFER

Marine Subwoofer	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (WxHxL)
MW-10WT	600w	300w	30-4kHz	91dB	10.5" x 10.5" x 6"

Marine Grade Waterproof 10" Subwoofer
High Density ABS Construction w/ UV Coating
100% Waterproof Sealed Back Speaker Frame
Stainless Steel Mounting Hardware Included
IMPP Polypropylene Cone & Rubber Surround
White and Titanium Grills Included
Quick Disconnect Terminals
Meets ROHS and CE Certifications
4-ohm System Impedance

LED HIGH PERFORMANCE HEADLIGHTS

WWW.FARENHEITUSA.COM
Fahrenheit

OPTIMUM



OPT-H1



OPT-H3



OPT-H4



OPT-H7



OPT-H8 / OPT-H9
OPT-H11



OPT-H13



OPT-880



OPT-9005 / OPT-9006



OPT-9004 / OPT-9007

360° rotational adjustment & length regulator to focus light beam for optimal light dissipation

4,000K color temperature simulates brilliant white daytime sunlight characteristics

Active COB LED matrix engineered using industry-leading optical illumination analysis software

Superconductive ceramic circuit panel and magnesium alloy chassis resist heat build-up

Built-in Can-Bus/ECM control interfaces automatically program to any vehicle configuration

OEM standard electrical connectors & chassis bracket configurations ensure exact vehicle fitment

3,000 lumen emitting diode capable of generating up to 3X the light of typical halogen headlamp.

5,000hr/3-5 years expected lifetime, surpassing 2-3 year lifespan of typical halogen headlamp

LED SELECT SERIES HEADLIGHTS

XENON HEADLIGHTS

Fahrenheit WWW.FARENHEITUSA.COM



H1-12V 100W



H3-12V 100W



H4-12V 100W



H7-12V 100W




H8-12V 35W



SEL-H1



SEL-H3




SEL-H4



SEL-H7



SEL-H8 / SEL-H9
SEL-H11



SEL-H13



H9-12V 65W



H11-12V 55W



9004
12V 100/80W



9005
12V 100W



SEL-880



SEL-9005 / SEL-9006



SEL-9004 / SEL-9007



9006
12V 80W



9007
12V 100/80W



H13 / 9008
12V 65/55W



880
12V 27W

THE BEST

POWER ACOUSTIK®



www.PowerAcoustik.com

2C17

©2016 POWER ACOUSTIK ELECTRONICS
MONTEBELLO, CALIFORNIA, U.S.A. ALL RIGHTS RESERVED
SPECIFICATIONS AND DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
PRINTED IN U.S.A