


# KIN30XT

30 INSERT HOOD, 1 MOTOR 600 CFM



Complete liner solution with powerful variable-speed blower, pro filtration and bright worktop lighting

Dishwasher-safe restaurant style pro baffle filters

600 CFM with 3 speed setting and booster

Digital CFM reducer to 395/295 CFM

Energy-saving LED lights

Electronic push buttons controls

ADA compliant Remote Control

Can be installed in recirculation mode with optional charcoal filter accessories

Designed and manufactured in Italy

2 years parts & labor warranty

## PRODUCT FEATURES

|                   |                         |
|-------------------|-------------------------|
| Size              | 30"                     |
| Hood type         | Built-In                |
| Hood finish       | Stainless steel         |
| Motor             | 1                       |
| Speed             | 3 + Booster             |
| Hood control      | Electronic with buttons |
| Remote control    | Included                |
| Lights            | 2 LED                   |
| Filters type      | Baffle stainless steel  |
| Extraction power  | 600 CFM                 |
| Sound Level (min) | 1.5 Sones               |
| Recirculation     | Yes                     |
| Duct cover        | Not applicable          |
| Duct size         | 6" diameter             |

## TECHNICAL SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Electrical supply               | 110 V 60 HZ - 410 W<br>3.3 Amp                   |
| Power connection                | NEMA 5-15P with 59" power cord                   |
| Certification                   | ADA Compliant, CEC, UL                           |
| Packaging dimensions and weight | W 32 1/2"<br>H 16 3/4"<br>D 17 5/8"<br>35.28 lbs |

## OPTIONAL ACCESSORIES


|        |                          |
|--------|--------------------------|
| 901531 | Charcoal filters         |
| 901532 | Durable charcoal filters |

# KIN30XT

30 INSERT HOOD, 1 MOTOR 600 CFM




## DIMENSIONS

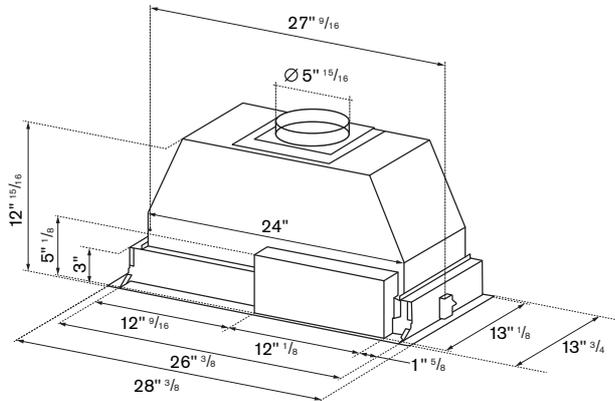


## HOOD CLEARANCE

Recommended height above cooking surface  
Min 24" for induction/electric worktop  
Min 30" for gas worktop

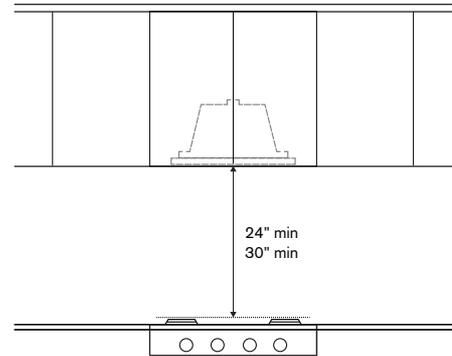

## CABINET CUT-OUT

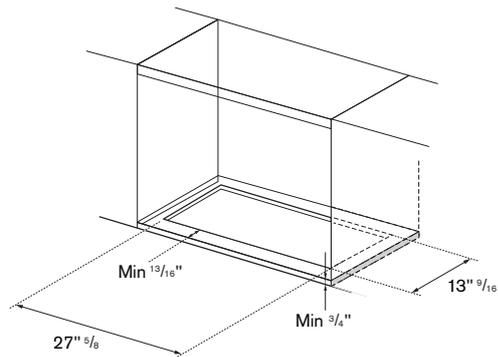

## ELECTRICAL CONNECTION

The Power Supply Cord and plug must be connected to a separate 120 Volt AC 60 Hz, 15 Amp or more branch circuit, single grounded receptacle. The cord has a 3-pronged plug and must be installed into an outlet that is properly grounded. The electrical receptacle must be within the minimum cord length of 59".

### WHEN USING 3-PRONGED PLUG

