

Installation instructions

Whole house water filter

A replacement for the following water filter:

FXHSC

Filter life: up to 6 months or 30,000 gallons, whichever comes first will vary based on water condition.

Filter features:


- Economical alternative to expensive substitutes.
- Easy installation and operation.
- Provides cleaner, fresher water by reducing impurities.
- Designed to provide up to 6 months of life or 30,000 gallons water.
- Does not remove minerals which may be beneficial to health.

Operating specifications:

Minimum operating temperature.....	4.4°C/40°F
Maximum operating temperature.....	38°C/100°F
Rated capacity.....	113,562 litres/30,000 gallons
Flow rate.....	15 lpm/4 gpm

Installation instructions:

1. Turn off water to filter. Water must be shut off from an upstream valve.
2. Press the red pressure release button to release pressure.
3. Unscrew the filter canister and discard used filter. Wash the filter canister with mild soap and water. Do not use harsh cleaners or hot water.
4. Inspect the filter canister O-ring. Make sure it is lightly lubricated with clean food grade silicone grease. Be sure the o-ring is seated in the groove. It is recommended that you replace the O-ring if it is damaged.
5. Place a new filter cartridge into the canister, making sure it is centered and completely seated on the bottom seal.
6. Reinstall the filter canister to the unit. Use the canister wrench to tighten the canister. **DO NOT OVERTIGHTEN.**
7. Slowly turn on water to the filter by using the upstream shut-off valve.
8. Press the red pressure release button to remove trapped air.
9. After installation, flush the cartridge for 15 minutes.

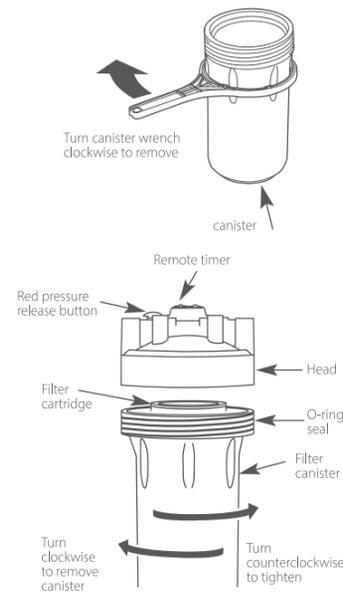

8080A | V040

140mm

210mm

⚠ Caution:

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Storage and maintenance:

- Stored filters do not expire. Keep your unused filters in a cool, dark, and dry place until you need them.
- If you do not use your filter for more than four days, run two gallons of water before using it to prevent bad tasting water.

Frequently asked questions:

- Q:** Do I need to remove the filter prior to descaling equipment?
A: Yes, remove filter prior to descaling and inspect for integrity if needed replace with a new filter.
- Q:** If I do not change my filter every 6 months, can this damage the system?
A: Yes, you must replace the filter every 6 months or sooner if water flow is reduced or if there is heavy sediment/rust present. Filters left in longer will fatigue, degrading filter performance.

⚠ Warning:

To reduce the risk of property damage due to water leakage, the filter **MUST** be installed in accordance with the manufacture's specifications and instructions. This filter unit must be replaced every 30,000 gallons or 6 months. Failure to follow instructions and operating specifications will void your warranty. What's more, manufacturer assumes no responsibility or liability for damage arising out of misuse of the product.

*The service life mentioned above is subject to chlorine reduction. Actual result varies according to the local water quality.

Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)
 E-mail: service@water-filter.com



图像颜色请依据数码稿印刷
 请不要擅自变更来稿件, 如须修改, 请联系伊可普做有关决定

印刷品技术要求 IMPORTANT PRINTING CAUTION

1. 印刷要求 覆光膜 覆亚膜 UV油 吸塑油 过油 丝印
2. 材质要求 80g双胶纸, 双面印刷
3. 颜色要求 单黑印刷
4. 版面要求 印刷品文字线条印迹清晰、无重影; 印刷品套印准确无偏色、溢墨、指痕等; 印刷品上层均匀、光亮、牢固无粘连; 覆膜表面平整、无褶皱、光泽度好; 纸张材质正确, 切边整齐、压线深浅适中、洁净、无斑点和条痕。

版式设计要求:

1. 字体: 标题为Myriad Pro SemiBold, 内容为 Myriad Pro light;
2. 上下页边距为9mm, 左右边距为8mm;;
3. 标注说明书长宽尺寸, 单位mm.

伊可普		青岛伊可普电器有限公司包材设计图纸	
品牌 BRAND NAME		工厂型号 ITEM NO.	EWf-8080
物料编码 INNER CODE	03070008080A	版本号 VERSION	V040
包材文件名称 FILE NAME	03070008080A EWf-8080A-说明书-V040		
规格 MEASURE	210*140mm	页数 PAGE	2P
设计负责人 DWG BY	张鑫龙	审核日期 VERIFY DATE	
变更日期 REVISIONS	2021.11.17		
变更描述 DESCRIPTION	1.增加24H7D365客服信息		