

1 X 2 HDMI SPLITTER 4K@60Hz 4:2:0

Model: JTECH-MINISP-4K0102 | JTD-3287

Operating Instructions



Notice

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

Features

- Displays an ultra Hi-Def source simultaneously on two displays
- Supports resolution up to 4K@60Hz 4:2:0
- Compliant with HDMI 1.4 and HDCp 1.4
- Supports audio formats such as PCM2.0, DTS, Dolby, LPCM CH7.1
- Supports HDR and 3D

Package Contents


- 1x HDMI Splitter
- 1x 5V/1A DC Adapter
- 1x User Manual

SPECIFICATIONS

Operating Temperature Range	-5 to +35°C (+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Bandwidth frequency	10.2Gbps
Input ports	1xHDMI input(female)
Output ports	2xHDMI outputs(female)
Resolution outputs	up to 4K@60Hz 4:2:0
Audio format	PCM2.0, DTS, Dolby, LPCM Max CH7.1
Dimensions(LxWxH)	60.8x69.5x22mm
Power consumption	1.5W(MAX)
Net Weight	120g

Note1: Specifications are subject to change without notice. Mass and dimensions are approximate.

PANEL DESCRIPTIONS

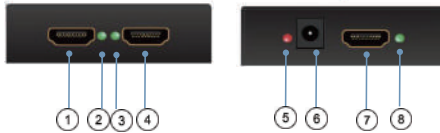

- ① HDMI output 1
- ③ HDMI output 2 indicator
- ⑤ Power indicator
- ⑦ HDMI input

- ② HDMI output 1 indicator
- ④ HDMI output 2
- ⑥ Power input
- ⑧ HDMI input indicator

EDID copy function:

The default EDID mode is to copy the EDID of sink display;
 1. Copy 4K EDID if both displays support 4k,
 2. Copy 1080p EDID if one display supports up to 1080p only
 3. Copy 1080p EDID if can not read EDID of display

Connecting and operating

- 1) Connect the HDMI input source to input port of HDMI splitter.
- 2) Connect the HDMI splitter output ports to the displays.
- 3) Power up splitter, source and displays.

Connection Diagram

