


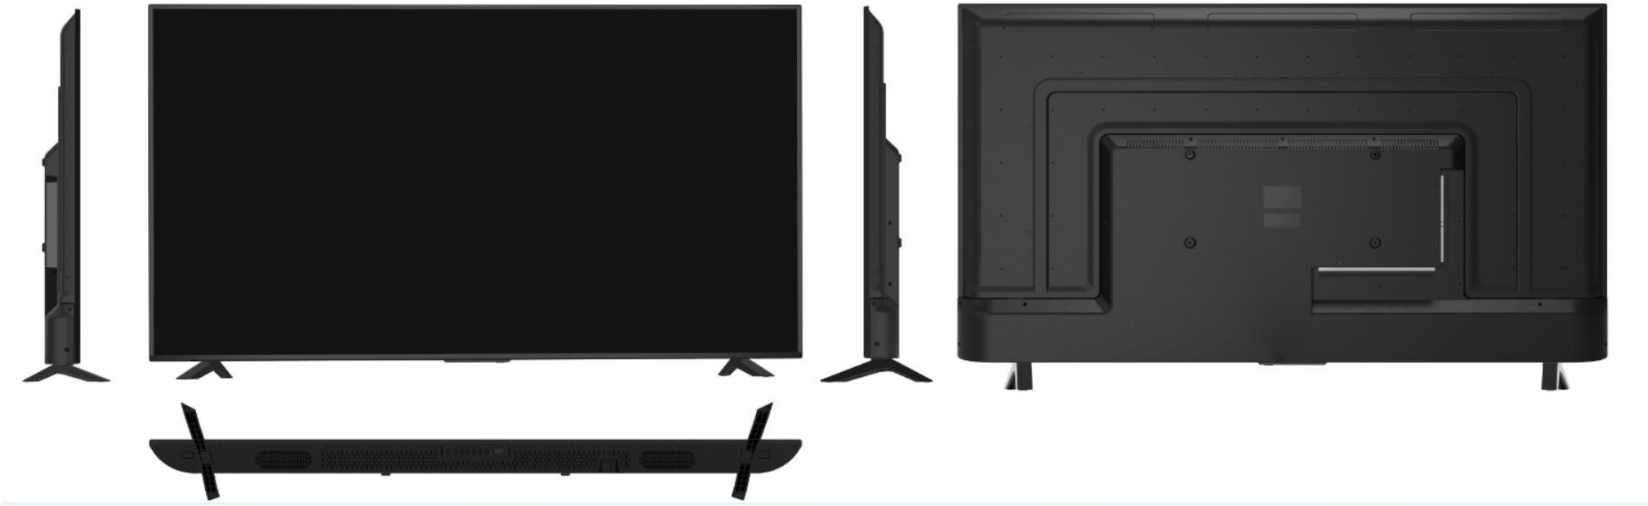

Bezel		
L/R/Top/Down		.47/.47/.47/.61 INCH
Thickness		2.95"
Dimension(L/W/H)		
VESA Dimension (WxH)		200*200 (M6)
Unit W/stand		57.32"x34.96"x12.24"
Unit W/O stand		57.32"x33.18"x3.34"
Master Carton		66.14"x41.73"x8.11"
Weight (N.W.)		
Unit W/stand		46.5 LBS
Unit W/O Stand		45.1 LBS
Unit W/stand W/Master Carton		70.5 LBS
Container Loading(unit)		
20' GP Container Unit Load w/o Pallet		72
40' GP Container Unit Load w/o Pallet		154
40' HQ Container Unit Load w/o Pallet		154
Video Connections		Quantity
	Analog&Digital TV Tuner	1
	HDMI	3
	Component Input (Y,Cb,Cr/Y,Pb,Pr)	1(Y terminal will be the same)
	VGA Input (15 pin D-Sub)	1
	PC AUDIO IN	1
	USB	2
	RJ45	1
	TF	N/A
	Composite Video Input	1
Audio Connections		Quantity
	Stereo Mini Phono Jack Input (3.5mm)	N/A
	Headphone: Stereo Mini (3.5mm)	1
	RCA Input	×1(R/L)
	Optical Digital Output	1
TV Reception		
TV System		ATSC/NTSC M
Tuner receiving range		CH2~CH69 AIR/CH1~CH135 CABLE
Antenna Impedance		75 ohm
Connector type		F
Accessories in the box		
Remote control/Battery		
Stand/Screws		
Quick Connect Guide/User manual/Warranty card		
\		
\		
\		
\		

Display Features	
Screen Size	64.5inch
Display Type	LED
Aspect Ratio	16:9
Panel Resolution	3840 x 2160
Brightness	220 ~ 270 cd/m ²
Contrast Ratio	3200 ~ 4000:1
Viewing Angle	178°(H) x 178°(V)(CR≥10)
Response Time Gray-Gray	5.5 ms
Backlight Life	> 30000 hrs
Panel Refresh Rate	60HZ
HDMI Resolutions Supported	
	640 x 480 @ 60Hz/70Hz/75Hz
	800 x 600 @ 60Hz/70Hz/75Hz
	1024 x 768 @ 60Hz/70Hz/75Hz
	1280 x 1024 @ 60Hz
	1360 x 768 @ 60Hz (HD)
	1920 x 1080 @ 60Hz (FULL HD)
	3840 x 2160@ 30HZ/60HZ(Ultra-HD)
Features	
Built in 3D PAL/NTSC Comb Filter	
Built in BTSC/SAP	
Over-The-Air ATSC/NTSC RF Input Support	
Digital/Analog Channel auto tuning	
Support V-CHIP/CCD/Favorite Channel Edition	
Component &HDMI support :480I,576I,480P,576P,720P,1080I ,1080P , 2160P	
Built in WiFi:stream your favorite music, movies and TV shows and access apps like Netflix,Vudu,YouTube,Accuweather,Pandora , Facebook, Twitter	
USB Supports File Format: jpeg、 mjpeg	
OSD Language:English, French, Spanish	
Electronics	
Solution	Mstar MSD6586
Maximum Audio Output	2x8 W(L/R)
Power Requirements	
Power Source	AC 100 ~ 240V 50/60Hz
Unit input power	220W
Standby consumption	< 0.5 W
Environment	
Operating Temperature	5°C ~ 35°C
Operating Humidity	20% ~ 80%
Storage Temperature	\
Storage Humidity	\