



ACCESSORY POWER PACK

Accessory Power Pack for Lorex Battery-Operated Cameras

PRODUCT SPECIFICATIONS

Battery Description	Rechargeable Lithium-ion battery pack
Battery Type	3-cell 18650 cylindrical Lithium-ion cell
Battery Capacity	8,700mAh
Nominal Voltage	3.7V
Charging Voltage	4.2V
Standard Charge Current	1A
Discharge Cut-off Voltage	2.8V
Standard Discharge Current	4A
Operating Temperature	Charge: 32 °F to 122 °F / 0 to 50 °C Discharge: -4 °F to 140 °F / -20 to 60 °C
Storage Temperature	≤70%RH -4 °F to 77 °F / -20 to 25 °C
Protection	Over-charge, Over-discharge, Short-circuit
Weight	174.5 g / 0.38 lb
Dimensions (W×D×H)	72.94 × 78 × 27.89 mm

MODEL INFORMATION

ACBATTR3A 6-95529-05287-8

PACKAGE DIMENSIONS


Package	Blue Box
Package Weight	0.494 lb / 0.224 kg
Package Dimensions (W × D × H)	4.33 × 3.35 × 1.57" / 110 × 85 × 40 mm
Package Cube	0.013 ft ³ / 0.0003 m ³

PACKAGE CONTENTS

- 3-Cell Power Pack
- Battery Cover (Black)
- Battery Cover (White)
- Battery Locking Screw Kit
- Quick Start Guide



PRODUCT DIMENSIONS

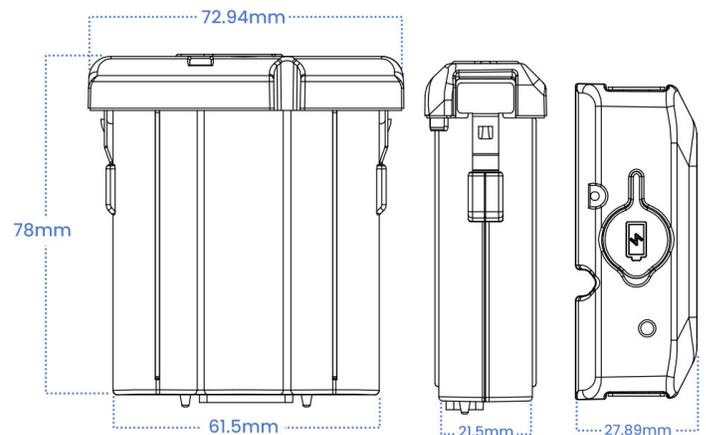

ACBATTR3A
lorex.com

Lorex Corporation
10440 Little Patuxent Parkway, Ste. 300,
Columbia, MD 21044, United States

© 2023 Lorex Corporation
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE.
07102023-1