

H 7780 BP2  
30" double oven  
in a combinable design with wireless precision probe.



- Large touch display with proximity sensor – M Touch + MotionReact
- Achieve perfect results with ease – Automatic programs
- Minimal cleaning effort – Self Clean and Self Clean ready
- Beautifully light dough and browned crusts – Moisture Plus
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516487432 / Material number: 11805570 / Old Material Number: 22778047USA

| Construction type and design                                         |                          |
|----------------------------------------------------------------------|--------------------------|
| Built-in wall oven                                                   | •                        |
| ContourLine                                                          | •                        |
| Appliance color                                                      | Clean Touch Steel        |
| Convenience features                                                 |                          |
| Rapid PreHeat                                                        | •                        |
| Roast probe                                                          | Wireless precision probe |
| Keep-warm function                                                   | •                        |
| Crisp function                                                       | •                        |
| Operating modes                                                      |                          |
| Defrost                                                              | •                        |
| MasterChef automatic programs                                        | •                        |
| Auto roast                                                           | •                        |
| Broiling operating modes                                             | •                        |
| Maxi Broil                                                           | •                        |
| Broil                                                                | •                        |
| Intensive Bake                                                       | •                        |
| Moisture Plus                                                        | •                        |
| Moisture Plus with Convection Bake                                   | •                        |
| Moisture Plus with Surround                                          | •                        |
| Moisture Plus with Intensive                                         | •                        |
| Moisture Plus with AutoRoast                                         | •                        |
| Slow roast                                                           | •                        |
| Surround                                                             | •                        |
| Browning                                                             | •                        |
| Bake                                                                 | •                        |
| Convection Roast                                                     | •                        |
| Special modes                                                        | •                        |
| Control panel                                                        |                          |
| Individual settings                                                  | •                        |
| User convenience                                                     |                          |
| Networking with Miele@home                                           | •                        |
| Control panel                                                        | M Touch                  |
| MotionReact: Light comes on when movement is detected                | •                        |
| MotionReact: Display comes on when movement is detected              | •                        |
| MotionReact: Audible signal to acknowledge when movement is detected | •                        |
| MotionReact: Detection of cabinet fronts                             | •                        |
| SoftOpen                                                             | •                        |
| SoftClose                                                            | •                        |
| ComfortSwivel handle                                                 | •                        |
| MultiLingua                                                          | •                        |
| MyMiele                                                              | •                        |
| Show me how                                                          | •                        |
| Timed bursts of steam                                                | •                        |
| Polyphonic acoustic signals                                          | •                        |
| Timers                                                               | •                        |
| Time of day display                                                  | •                        |
| Time synchronization                                                 | •                        |

H 7780 BP2

30" double oven

in a combinable design with wireless precision probe.



EAN: 4002516487432 / Material number: 11805570 / Old Material Number: 22778047USA

|                                                    |                 |
|----------------------------------------------------|-----------------|
| Date display                                       | •               |
| Minute minder                                      | •               |
| Programming start of cooking duration              | •               |
| Programming end of cooking duration                | •               |
| Programmable cooking time                          | •               |
| Actual temperature display                         | •               |
| Audible signal when desired temperature is reached | •               |
| Default temperature                                | •               |
| Favorites                                          | •               |
| Sabbath program                                    | •               |
| DirectWater                                        | •               |
| MotionReact proximity sensor                       | •               |
| <b>Efficiency and sustainability</b>               |                 |
| Residual heat utilization                          | •               |
| <b>Cleaning convenience</b>                        |                 |
| Clean Touch Steel surface                          | •               |
| Self-cleaning                                      | •               |
| Catalyzer                                          | •               |
| CleanGlass door                                    | •               |
| <b>Safety</b>                                      |                 |
| Appliance cooling system and cool touch front      | •               |
| Safety cut-out                                     | •               |
| System lock                                        | •               |
| Door lock during self cleaning                     | •               |
| Sensor lock                                        | •               |
| <b>Technical data</b>                              |                 |
| No. of rack levels                                 | 6               |
| Number of shelf levels oven compartment 1          | 6               |
| Number of shelf levels oven compartment 2          | 6               |
| Labeling of rack levels                            | •               |
| Oven interior lighting                             | 2 halogen spots |
| TwinPower hot air fans                             | •               |
| Temperatures in °F (°C)                            | 85-575 (30-300) |
| Appliance width in in. (mm)                        | 28 3/8 (720)    |
| Appliance height in in. (mm)                       | 50 7/8 (1290)   |
| Appliance depth in in. (mm)                        | 23 5/8 (597)    |
| Weight in lbs. (kg)                                | 343.92 (156.0)  |
| Total connected load in kW                         | 10.50           |
| Power Rating in V                                  | 120             |
| Frequency in Hz                                    | 60              |
| Number of phases                                   | 1               |
| Fuse rating in A                                   | 50              |
| Connection wire with plug                          | •               |
| Length of power cord in in. (m)                    | 1.80            |
| Length of water inlet hose in ft. (m)              | 1.5             |
| <b>Accessories supplied</b>                        |                 |
| Perforated gourmet baking tray with PerfectClean   | 1               |
| PerfectClean universal baking tray                 | 2               |
| Self Clean ready baking and roasting rack          | 4               |
| Self Clean ready wire rack with rail system        | 2               |
| Removable Self Clean-ready side racks (pair)       | 1               |

in a combinable design with wireless precision probe.

## Grill and Roasting Insert with PerfectClean

### Available display languages


bahasa malaysia, dansk,  
deutsch, eesti, english,  
english (AU), english (CA),  
english (GB), english (US),  
español, français, français  
(CA), français (FR), hrvatski,  
italiano, latviesu, lietuvii,  
magyar, nederlandse,  
norsk, polski, portuguese,  
русский, română,  
slovenčina, slovenščina,  
srpski, suomi, svenska,  
türkçe, українська, čeština,  
ελληνικά,



## H 7780 BP2


30" double oven

in a combinable design with wireless precision probe.

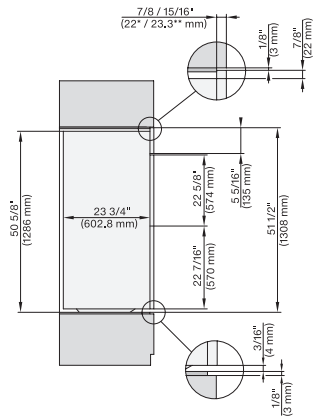


H 6x80 BP2, H 6x80-2BP2, H 7x8x, side view, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

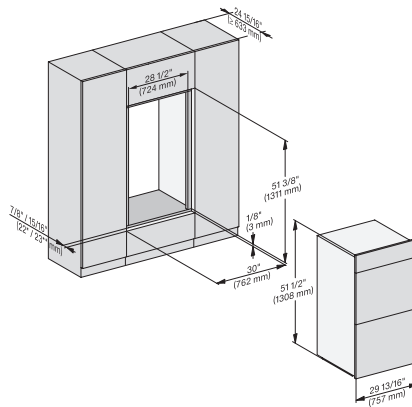


H 6x80 BP2, H 6x80-2BP2, H 7xxx fitting, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

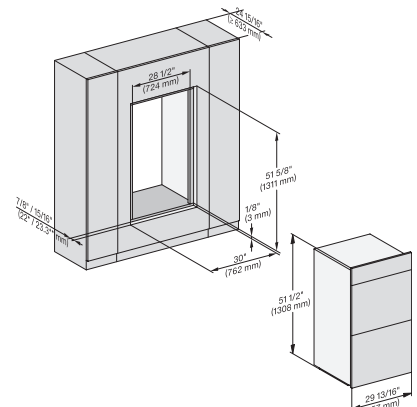


H 6x80 BP2, H 6x80-2BP2, H7xxx fitting wide front, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

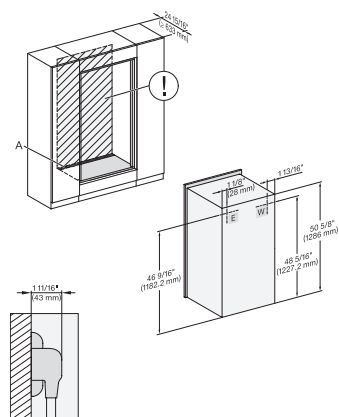


H 6x80 BP2, H 6x80-2BP2, H7x80BP2, installation, installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection, W = Water connection

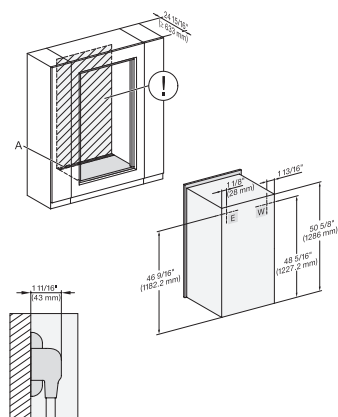

H 6x80 BP2, H 6x80-2BP2, H7x80BP2, wide front installation, installation drawing, Flush inset, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection, W = Water connection

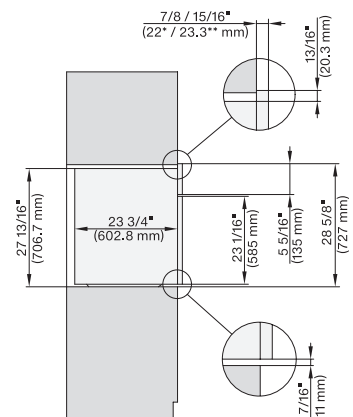

H 6x8x BP, H 6x80-2BP, H2x80BP, H7x8xBP(X), side view, installation drawing, Proud, NA


7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

## H 7780 BP2 30" double oven in a combinable design with wireless precision probe.

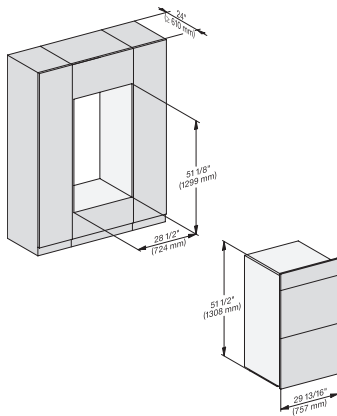


H 6x80 BP2, H 6x80-2BP2, H7x80BP2, fitting, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

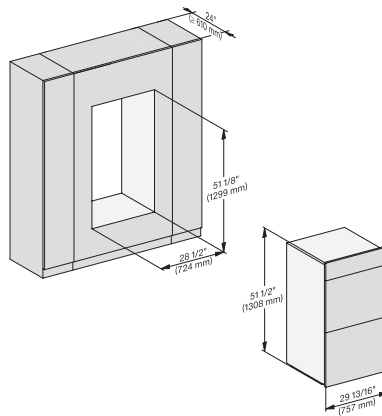


H 6x80 BP2, H 6x80-2BP2, H7x80BP2, fitting wide front, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

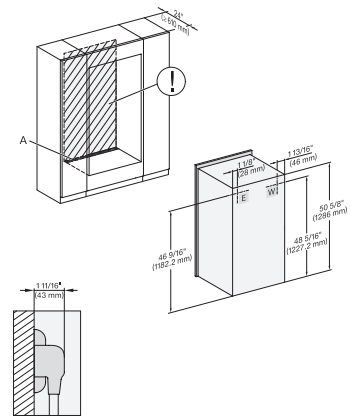


H 6x80 BP2, H 6x80-2BP2, H7x80BP2, installation, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection, W = Water connection

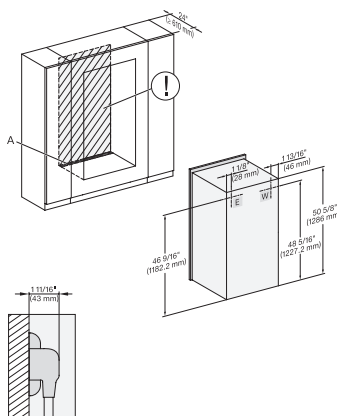

H 6x80 BP2, H 6x80-2BP2, H7x80BP2wide front installation, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection, W = Water connection

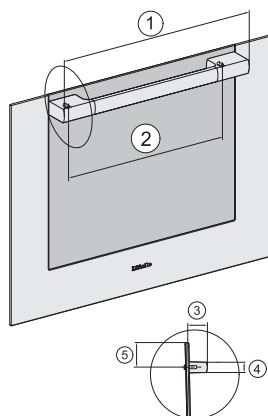

Handle 30" DGC73xx, DGC75xx, DGC77xx, H71xx, H75xx, H77xx, ContourLine – NA7000 - Installation drawing

21 1/8" / 536 mm, 17 1/2" / 444 mm, 2 1/2" / 64 mm, 1 3/8" / 35 mm, 1 7/16" / 37 mm