


For information about other American International automotive accessories visit our website at:

<http://www.aius.net>



**American
International**
Car Stereo Installation Kits & Accessories

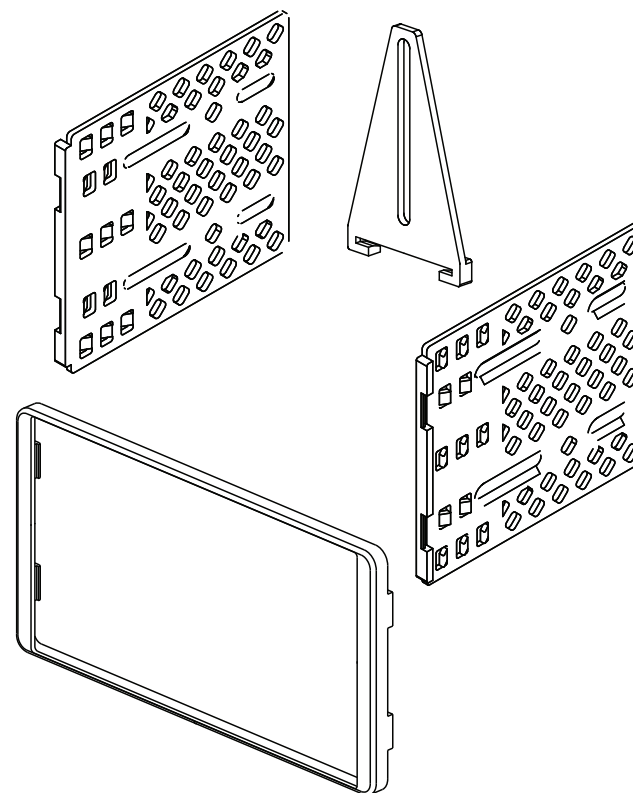

FMK552 Mounting Kit



American International

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iFMK552

***Note:** Majority of installations of a double DIN radio with the FMK552 will require minor to major dash and subdash modifications.

©2015 AMERICAN INTERNATIONAL INDUSTRIES, INC.

TECH Ver. 12/14 PRINT Ver. 5/15

FACTORY RADIO REMOVAL

For ease of factory radio removal, use American International radio removal tool set **part# URT-460** (sold separately).

SPECIAL NOTES


CAUTION: This installation kit is designed to go into the vehicles listed. Once the kit is installed into the dash opening, if you need to remove the aftermarket radio, you will have to remove the dash trim bezel to do so. The vehicles listed in the vehicle application section of this instruction sheet that have an (*) asterisk next to them require that the vehicle's entire dash be removed to be able to get the installation kit and after market radio components out without damaging the vehicle's dash integrity.

Liability Disclaimer

NOTE: American International assumes no fault or liability of damages for any part of the vehicle or radio components on installation or removal of the FMK-552 into these vehicles.

KIT ASSEMBLY INSTRUCTIONS


1. Using screws provided with radio components attach left and right side brackets to the (2) ISO mount components (do not tighten at this time).
2. Attach ISO trim ring to ISO mount brackets.
3. Adjust radio components forward or backward for desired look and tighten mounting screws when desired look is attained.
4. Remove trim ring from ISO mount assembly.

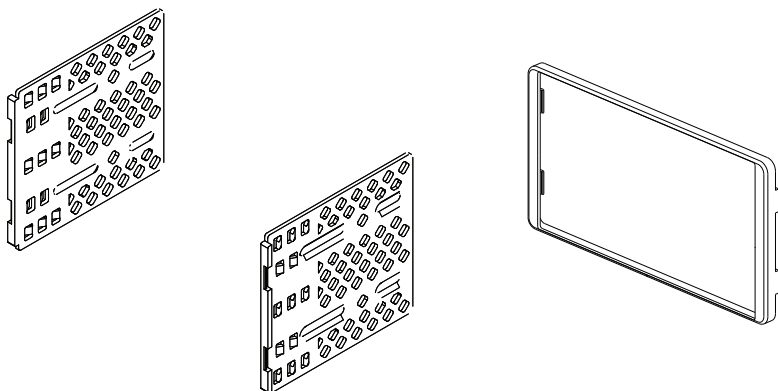

RADIO INSTALLATION INSTRUCTIONS


NOTE: The installation for this kit requires dash modification.

1. Carefully remove the top and bottom lip sections from the inside of the dash bezel's radio opening.
2. Attach rear support bracket to the rear of the ISO mount radios. (Support bracket may be located on top or bottom depending on vehicle)
3. **CAUTION:** See Special Notes section on page 2
4. Insert radio assembly into dash opening and lock into place.

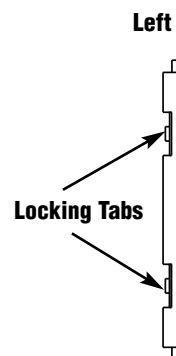

Kit mounting Depth Adjustment

NOTE: Using a flat blade screwdriver insert screwdriver into one slot at a time to depress the locking tabs to allow the radio assembly to be pushed to the second depth mounting position (repeat procedure for 3rd depth mounting position).

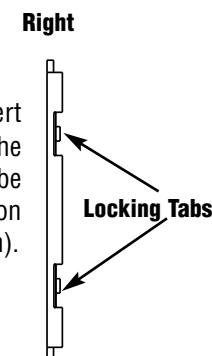

5. Attach installation kit trim ring only after desired mounting depth has been achieved.

Double DIN Trim

Rear Support Bracket

