



USER'S MANUAL

HDA30 SERIES



www.NightOwlSP.com



Thank you for choosing Night Owl Security Products!

By purchasing a Night Owl product, you receive a one (1) year warranty covering manufacturing defects in material and workmanship. Make the most of your warranty by completing the registration form online. In addition to warranty and technical support benefits, you will have access to our multitude of free instructional “How to Videos”. You can also view our instructional videos by clicking the “How to Videos” tab within your product’s page on our website.



Register at www.NightOwlSP.com!

Night Owl’s HDA30 Series Camera Compatibility:

Night Owl’s HDA30 DVRs are compatible with most analog cameras (400-900TVL), Night Owl’s Analog HD (AHD) and HD Analog (HDA) cameras. If the camera’s video quality either day or night is degraded, you may need to change the cable run from the camera to the DVR. This system is designed to work with CL2 UL Rated cabling or better.

Please see the warranty section of this manual for exclusions and additional details. Not all features and capabilities are shared across all models so you may see features which are not applicable. In addition you may see screen images that do not exactly match those on your display. This manual was accurate at the time it was completed. Due to our ongoing effort to constantly improve our products, functions may have been added or changed.

Night Owl highly recommends installing the most current firmware version available for your system. Verify your firmware version on the Info screen of the System menu tab.

Scan the QR code below to access our Quick Setup Guide that can assist you in configuring your Night Owl Security system.

Quick Setup Guide





TABLE OF CONTENTS

Table of Contents

CHAPTER 1:	FCC WARNINGS	7
CHAPTER 2:	SAFETY INSTRUCTIONS	9
CHAPTER 3:	SPECIFICATIONS	11
3.1	System Requirements	12
3.2	Package Contents	12
3.2.1	DVR Diagram	12
3.2.2	Camera Diagram	14
3.2.3	Mouse Diagram	14
CHAPTER 4:	CAMERA INSTALLATION	15
4.1	Video/Audio	16
4.2	Power	16
4.2.1	Standard Camera Power	16
4.3	Mounting the Cameras	17
CHAPTER 5:	DVR INSTALLATION	19
5.1	Connecting to a TV (via HDMI)	20
5.2	Power	21
CHAPTER 6:	GETTING STARTED	22
6.1	Startup Wizard	23
6.1.1	Camera Test	24
6.1.2	Network Check	24
6.1.3	Firmware Check	26
6.1.4	Password Creation	27
6.1.5	Date and Time Setup	28
6.1.6	Night Owl HD	29
6.1.7	Password Verification	30
6.1.8	Camera/Channel Settings	30
6.1.9	Camera Positioning	31
6.1.10	Channel Configuration	31
6.1.11	Default View	32
6.1.12	Helpful Links	33
6.1.13	Wizard Complete	33

6.2	Night Owl HD Mobile App	34
6.3	Displays and Icons	35
6.3.1	Login Screen.	35
6.3.2	Reset Password.	36
6.3.3	Live View (All Channels).	37
6.3.4	Right Click Menu	38
6.3.5	Menu Screen	39
CHAPTER 7:	MENUS AND SETTINGS.	40
7.1	General Menu	42
7.1.1	Display.	42
7.1.1 (a)	Output.	42
7.1.1 (b)	Privacy Zone	43
7.1.2	SnapShot	43
7.1.2 (a)	SnapShot.	43
7.1.2 (b)	SnapShot Schedule	44
7.1.3	Network	44
7.1.3 (a)	Main	45
7.1.3 (b)	Substream.	46
7.1.3 (c)	Email	46
7.1.3 (d)	Email Schedule	47
7.1.3 (e)	DDNS	48
7.1.4	Alarm.	48
7.1.4 (a)	Motion.	48
7.1.4 (b)	Motion Area Setup	49
7.2	Cameras Menu	50
7.2.1	Settings	50
7.3	Record Menu	51
7.3.1	Search	51
7.3.1 (a)	Video Playback.	52
7.3.2	Backup	53
7.3.3	SnapShot	54
7.3.4	Settings	55
7.3.4 (a)	Record Schedule	55

	7.3.4 (b) Video	56
7.4	Device Menu	56
	7.4.1 HDD	56
	7.4.2 PTZ	57
	7.4.2 (a) Settings.	57
7.5	System Menu	58
	7.5.1 General	58
	7.5.1 (a) Settings.	58
	7.5.1 (b) DST	59
	7.5.1 (c) NTP	59
	7.5.2 Users	60
	7.5.3 Info	61
	7.5.3 (a) Info.	61
	7.5.3 (b) Channel Info	62
	7.5.3 (c) Record Info	62
	7.5.4 Log	63
7.6	Advanced Menu	63
	7.6.1 Maintain.	63
	7.6.2 Events	64
	7.6.3 Auto Upgrade	65
CHAPTER 8	GLOSSARY	66
CHAPTER 9:	WARRANTY	68
CHAPTER 10:	TROUBLESHOOTING	71
CHAPTER 11:	USER INFORMATION	74
	CUSTOMER SUPPORT	Back Cover



ADVANCED

Night Owl's DVRs are manufactured for quality and ease of use. As such, our DVRs contain menus designed for advanced user's that should not be adjusted without having enhanced knowledge regarding the menu. In most cases the default settings allow for optimal functionality. The menus that should maintain the default settings are indicated with this icon.

DISCLAIMER: *The exact components of your system, images and quantities may vary depending on your model number. While these may vary, this manual will address the setup and initial configuration of your DVR and cameras.*

CHAPTER 1

FCC WARNINGS

Chapter 1: FCC Warnings

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Compliance Statement

These limits are designed to provide reasonable protection against frequency interference in residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed or used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on. The user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



CAUTION

The Federal Communications Commission warns the user that changes or modifications to the unit not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.



CHAPTER 2

SAFETY INSTRUCTIONS

Chapter 2: Safety Instructions

Use the provided power adapter.

Do not use this product with a power source that applies more than the specified voltage.

Never insert metal into the DVR case or its openings. Inserting metal into the DVR case may cause electric shock.

Do not operate in wet or dusty areas.

Avoid placing the DVR in areas such as a damp basement or dusty attic.

Do not expose the DVR to rain or use near water. If the DVR accidentally gets wet, unplug it and contact technical support immediately.

Keep product surfaces clean and dry.

To clean the outside case of the DVR, use a lightly dampened cloth. Do not use cleaning solutions or solvents.

Do not install near any heat sources.

Do not install the DVR near any heat sources such as stoves, heat registers, radiators or electronics (including amplifiers) that produce heat.

Unplug the DVR when moving it.

Make sure that the DVR is unplugged before you move it. When moving this device, be sure to handle it with care.

Make sure there is good air circulation around the DVR.

This DVR uses an internal hard drive, which generates heat during operation for video storage. Do not block vents on the DVR, as these vents reduce the generated heat while the system is running. Place this product in well-ventilated area.

Do not attempt to remove the top cover. If you observe any abnormal operation, unplug the DVR immediately and contact technical support. Do not attempt to open the DVR to diagnose the cause of the problem.

Handle the DVR carefully.

If you drop the DVR on any hard surface, it may damage the device. If the DVR doesn't work properly due to physical damage, contact an authorized dealer for repair.

It is recommended to use your DVR with an uninterruptible power supply (UPS). Connecting your DVR and cameras to a UPS allows continuous operation even during power outages. The run-time duration will depend on the rating of the UPS used.



You may be subjected to severe electrical shock if you remove the cover of the DVR.

CHAPTER 3

SPECIFICATIONS

Chapter 3: Specifications

3.1 System Requirements

Please be sure that your PC/MAC® complies with the following specifications:

- PC Operating System: Windows® 7, Windows® 8/8.1 and Windows® 10
- PC Browser: IE® 8 and above, Edge®, Google Chrome™ and Firefox®
- MAC Operating System: MAC OS X® 10.7 and above
- MAC Browser: Safari® 7.1 and above

Please be sure that your mobile device complies with the following specifications:

- Android™: 4.0 and above
- iOS®: 7.1 and above

3.2 Package Contents


- 1 x 16 Channel 3MP HD DVR with Pre-installed 2 TB Hard Drive
- 3MP Indoor/Outdoor Infrared Bullet Cameras*
- 3MP Indoor/Outdoor Audio Enabled Dome Cameras*
- Bundles of Camera Cable*
- Mounting Hardware and Screws*
- 1 x 6 ft. HDMI Cable
- 1 x RJ-45 Cable (Ethernet)
- 1 x USB Mouse
- 1 x Support Material Packet
- Camera Power Adapter(s)*
- 1 x DC 12V DVR Power Adapter
- Camera Power Splitters*
- 3 x Night Owl Security Stickers




***Cameras, additional cables, power adapters and splitters only included in certain security kits. Check the product packaging for detailed kit contents.**

3.2.1 DVR Diagram

Once you have downloaded Night Owl HD and connected your DVR to your router, you can network your DVR by scanning the QR code which is located on the top of the DVR.

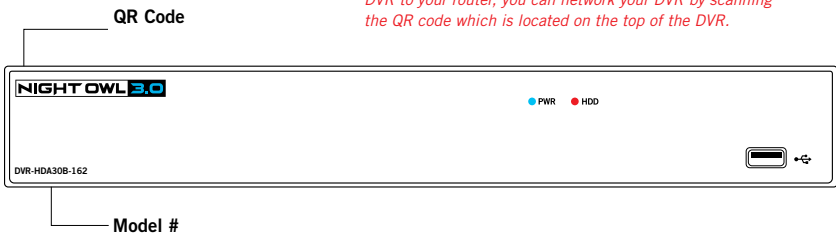

FRONT VIEW

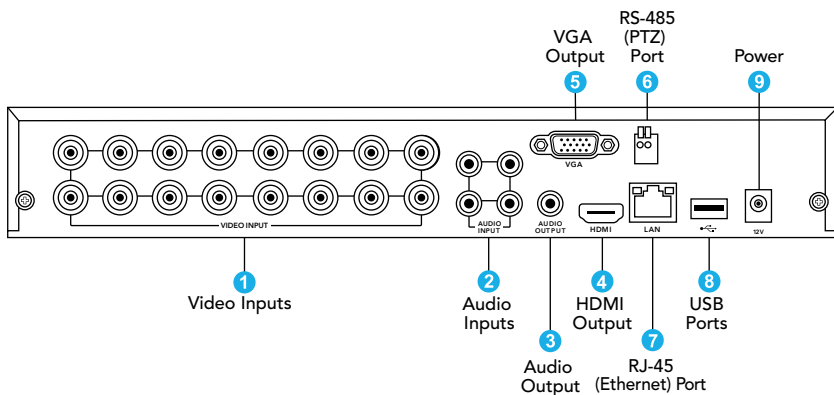

REAR VIEW


*Images used are for reference only. Your product may vary slightly.
A 16 channel model is displayed above.*

1. **Video Inputs** – video inputs allow for the connection of BNC cameras.
2. **Audio Inputs** – audio inputs allow for the connection of audio enabled cameras by connecting the white RCA plug to one of the audio inputs. After making the audio input connection, be sure to enable the audio function in the DVR's menu interface.
3. **Audio Output** – audio output allows for the connection of an amplified speaker.
4. **HDMI Output** – HDMI output allows for the video connection. If the TV/Monitor has an HDMI input, connect the HDMI cable from the HDMI output port on the DVR to the HDMI input port on your TV/Monitor.
5. **VGA Output** – VGA output allows for the video connection. If the TV/Monitor has a VGA input, connect the VGA cable from the VGA output port on the DVR to the VGA input port on your TV/Monitor. (VGA cable not included)
6. **RS-485 (PTZ) Port** – RS-485 port allows for the connection of a Pan-Tilt-Zoom (PTZ) camera. Some PTZ cameras utilize Up-the-Coax (UTC) technology and will not require the RS-485 port to function.
7. **RJ-45 (Ethernet) Port** – RJ-45 port will be used to connect the DVR to your router/modem via the included Ethernet cable. Keep in mind, you can quickly network your DVR to begin viewing your cameras remotely right from your mobile device by completing the DVR's Startup Wizard once you have connected the DVR to your router and powered on the DVR.
8. **USB Ports** – USB ports allow for the connection of a USB mouse and/or a USB flash drive. You will connect the included USB mouse to assist you in navigating the DVRs menu interface. You will connect a USB flash drive to download video files from the DVR and save them to your USB flash drive.
9. **Power Input** – power input to connect the included 12V DC power supply.

3.2.2 Camera Diagram

CAMERA


The exact cameras included with your system may vary by model.

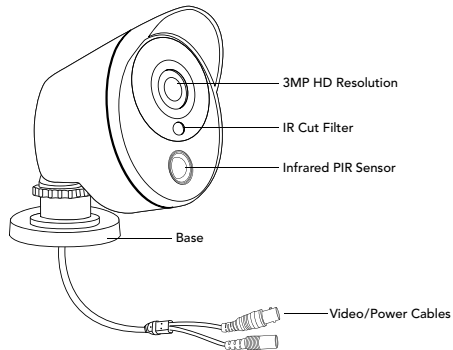

NOTE: Connect all cameras locally before final placement to ensure that all components function properly.

3.2.3 Mouse Diagram

MOUSE

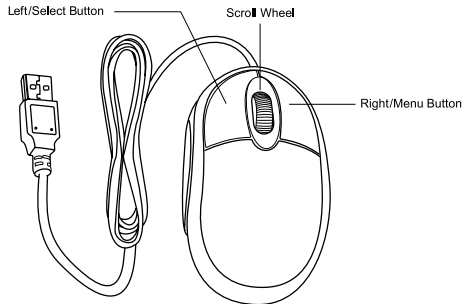

Live Viewing:

Double-click the left button on any camera view in split-screen mode to bring it to full screen display.

Double-click again to return to split-screen mode.

Right-click to show the control bar at the bottom of the screen.

Right-clicking again will hide the control bar.

In Setup:

Left-click to make a selection.

Right-click to cancel setup or return to previous screen.

To Enter Values:

Move the cursor to a blank field and click the mouse. A virtual keyboard will appear which supports numbers, letters and symbols. The Shift function will access symbols in addition to upper case letters.

CHAPTER 4


CAMERA INSTALLATION

Chapter 4: Camera Installation

4.1 Video/Audio

NOTE: Connect all cameras locally before final placement to ensure that all components function properly.

1. Locate an included 60 foot Video/Power cable.
2. Connect a camera to one end of the cable by matching the BNC connectors (yellow) and DC power connectors (red).
3. Audio enabled cameras will have an additional (white) RCA connection which will transmit the audio signal and will connect to the audio input port on the back of your DVR.

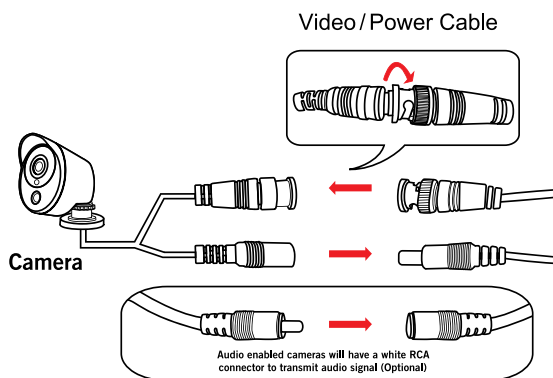


4. Plug BNC connectors on the other end of the cable into a Video Input port on the back panel of the DVR.
5. Repeat for each camera, noting the channel number each camera is plugged into.

4.2 Power

4.2.1 Standard Camera Power

1. Locate an included power splitter.
2. Connect the power splitter to the remaining DC power connectors (red) of the cables.
3. Plug the power splitter into the labeled camera power supply, then plug the camera power supply into an available wall outlet or UPS. Keep in mind, Night Owl always recommends utilizing a surge protector to minimize the risk of damage caused to your DVR in the event of a power surge.

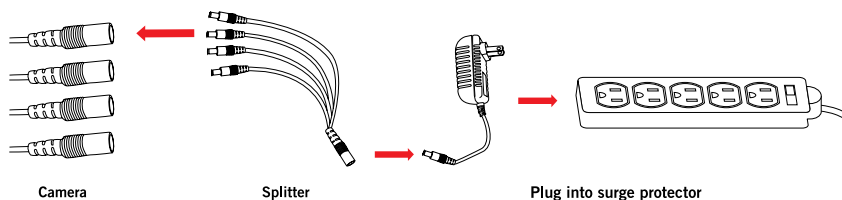

Cameras, additional cables, power adapters and splitters only included in certain security kits. Check the product packaging for detailed kit contents.

Make sure all cameras are working prior to mounting by connecting them as described in the section above. Once all cameras are confirmed to be fully operational, you can run the cables and mount the cameras in their final locations.

4.3 Mounting the Cameras

Camera distance from DVR.

The further the camera is from the DVR or monitor, the higher the chances of signal degradation. The camera's power supply should be located as near to the camera as possible when the distance exceeds 200 ft. as the power level will drop over extended distances resulting in video degradation.



Connect all cameras locally before final placement to ensure that all components function properly.

Do not place near high voltage wires or other sources of electrical interference. Electrical interference will degrade the quality of the signal.


Place camera out of reach to avoid vandalism.

Avoid direct exposure to weather. Do not place the camera where rain or snow will hit the lens directly or where the sun or bright light shines directly into the lens. Your camera is weatherproof, but it will not work when submerged in water. Ensure that all power and video connections are not directly exposed to water and are protected from the elements.


Mounting surface. The mounting surface must hold at least four times the camera's total weight. To mount your cameras:

1. Locate a camera and choose a location where you would like to mount the camera.

2. Indicate screw positions by marking three holes on the surface where you plan to mount the camera, using the holes in the camera base as a guide.

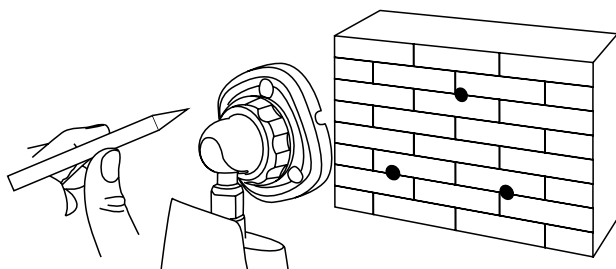

3. Using a drill bit slightly smaller than the included screw anchors, drill into the mounting surface using the guide marks you placed in the previous step.
4. Insert the screw anchors.
5. Line up the camera base holes with the screw anchors. Holding the base in place, insert screws and tighten until secure.

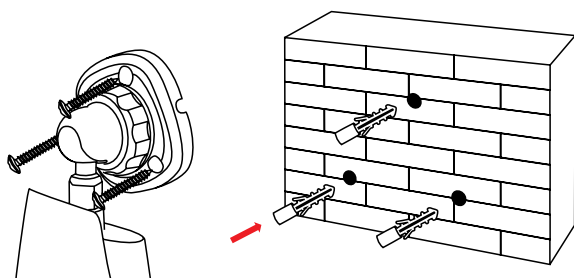

6. Once the base is screwed in place, make sure that the camera is securely mounted by placing gentle pressure on the mount.
7. Adjust the camera housing to point in the direction of the area you would like to monitor.



Don't feel like installing the system yourself? Let InstallerNet™ do the work for you! Contact us at 1-800-806-5513 or visit us at www.NightOwlISP.com.


CHAPTER 5

DVR INSTALLATION


Chapter 5: DVR Installation

5.1 Connecting to a TV (via HDMI)


1. Locate the included HDMI cable.



2. Plug one end of the cable into the HDMI port on the back of the DVR.

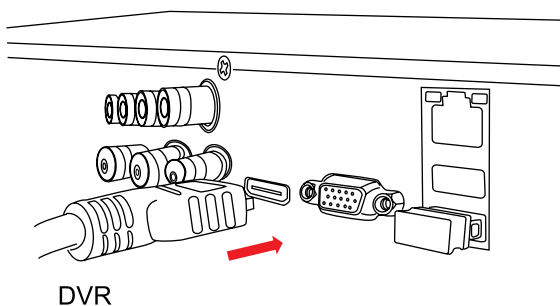

3. Connect the other end of the cable to an available HDMI input on your TV or monitor.

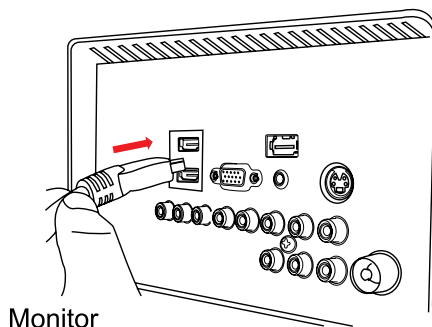

4. Select the appropriate video input channel on your TV or monitor to view the DVR.




If your TV does not have an HDMI port, you will need to purchase a VGA or a BNC-to-RCA video cable.

For a VGA connection, attach one end of the VGA cable to the DVR VGA port and the other end to your TV VGA port.

5.2 Power

1. Locate the labeled DVR power adapter.


NOTE: The camera power adapter and DVR power adapter should never be interchanged.



*DVR power adapter
may vary slightly.*


DVR Power Adapter

2. Plug the included power adapter into the back of the DVR.

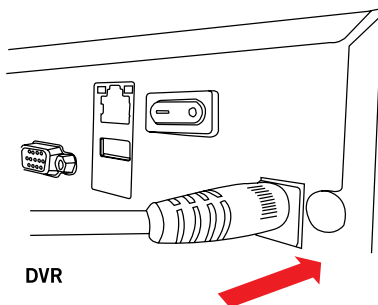

DVR

3. Plug the other end of the power adapter cable into an available wall outlet. If you are using an uninterruptible power supply (UPS), plug the adapter into one of its output sockets. Keep in mind, Night Owl always recommends utilizing a surge protector to minimize the risk of damage caused to your DVR in the event of a power surge.

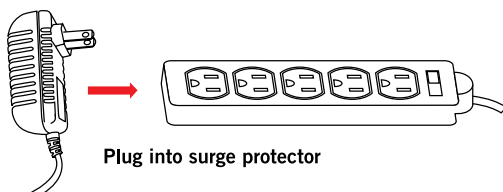

Plug into surge protector


CHAPTER 6

GETTING STARTED

Chapter 6: Getting Started


6.1 Startup Wizard

When your DVR is powered on it will display the Night Owl logo while initializing.

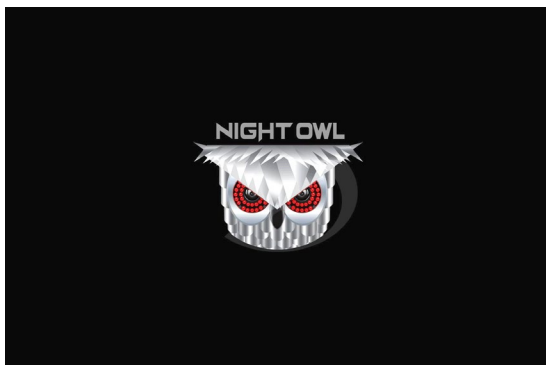


After initialization, you will be prompted to use the Startup Wizard. Follow the on-screen instructions to:


- Complete the basic setup of your DVR.
- Test your cameras locally.
- Upgrade the firmware.
- Create an Admin password.
- Set up the Night Owl HD App.
- Configure the recording settings.
- Configure notifications.

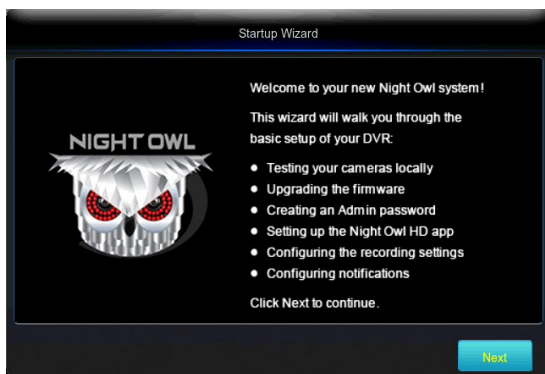

6.1.1 Camera Test

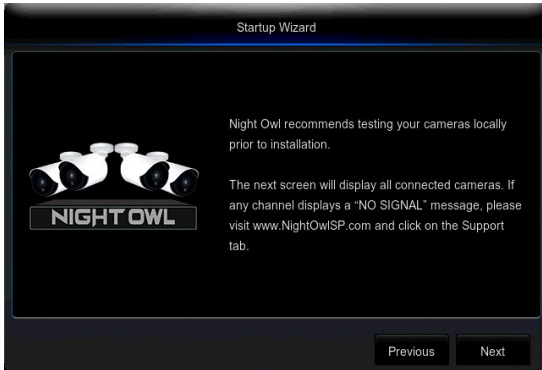


The Camera Test screen of the Startup Wizard serves as a reminder to test your cameras locally (on the DVR) prior to mounting them. If a connected camera displays a “No Signal” message, please visit www.NightOwlISP.com and click on the Support tab.

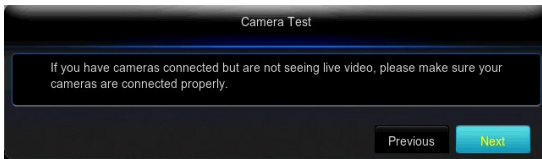


6.1.2 Network Check

The Network Check screen of the Startup Wizard displays instructions for how to connect your DVR to the Internet. Use the included Ethernet cable to establish a connection, as the DVR will not wirelessly connect to your router/modem.

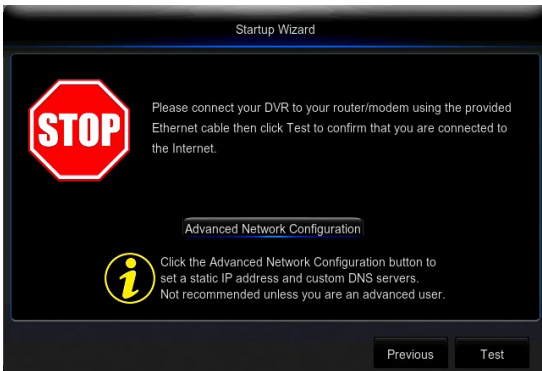


Once you have made the required connection using the Ethernet cable, you may click Test within the Startup Wizard to confirm the connection.

The Advanced Network Configuration tab is recommended only for advanced users.

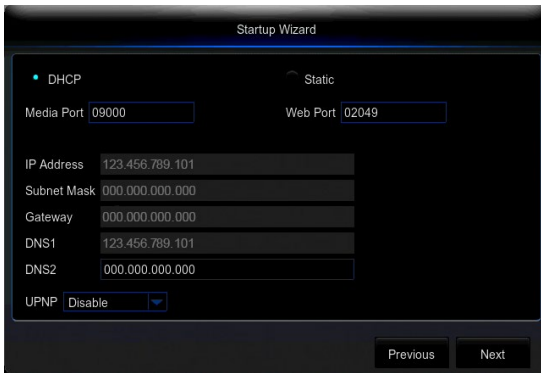

The image shows the 'Startup Wizard' window with the 'DHCP' tab selected. It contains fields for 'Media Port' (09000) and 'Web Port' (02049). Below these are fields for 'IP Address' (123.456.789.101), 'Subnet Mask' (000.000.000.000), 'Gateway' (000.000.000.000), 'DNS1' (123.456.789.101), and 'DNS2' (000.000.000.000). At the bottom left is a 'UPNP' dropdown menu set to 'Disable'. At the bottom right are 'Previous' and 'Next' buttons.

Once the Internet connection has been established, the Startup Wizard will display a successful connection screen.

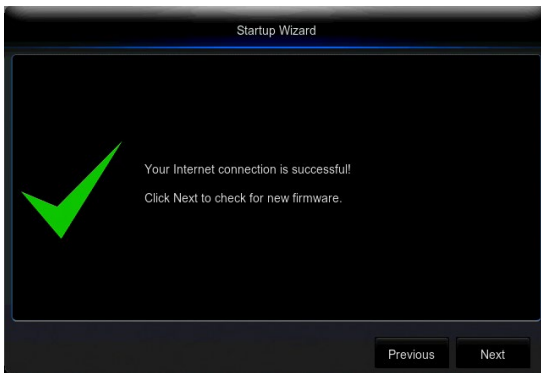

If your DVR is not able to establish Internet connectivity, a Connection Failed screen will appear. Follow the instructions on this screen to retest the network. If you wish to proceed with the DVR setup without a network connection, you may do so by clicking the box marked, "I do not want to connect to a network."



6.1.3 Firmware Check




The Firmware Check screen of the Startup Wizard will automatically check for updated firmware for your DVR.

NOTE: If your DVR does not have a network connection, the firmware will not update.



When the firmware for your DVR is updated to the most current version, the Startup Wizard will display the above screen.

6.1.4 Password Creation

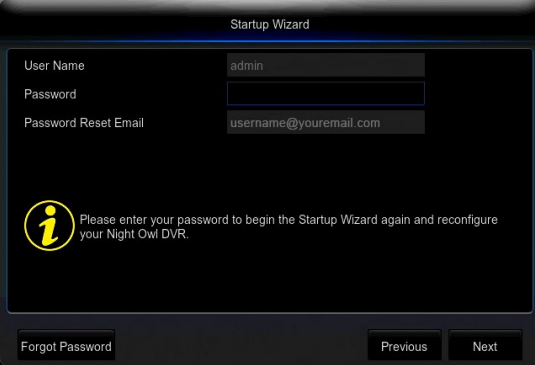


The image shows the 'Startup Wizard' window. It has three input fields: 'User Name' with 'admin' entered, 'Password' (empty), and 'Password Reset Email' with 'username@youremail.com' entered. Below the fields is an information icon and a message: 'Please enter your password to begin the Startup Wizard again and reconfigure your Night Owl DVR.' At the bottom are three buttons: 'Forgot Password', 'Previous', and 'Next'.

The Password Creation screen of the Startup Wizard requires you to create an admin password for your DVR system. Night Owl strongly suggests that you write down your admin password within the Quick Setup Guide for your DVR, as you will be required to login any time you want to configure or adjust your system settings.


This screen will also require that you set a recovery email address in the event that your admin password is forgotten.

NOTE: You will not be able to complete the Startup Wizard unless a recovery email address is established.

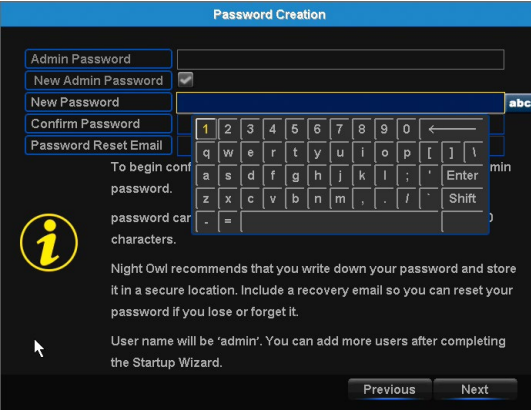

The image shows the 'Password Creation' window. It has four input fields: 'Admin Password', 'New Admin Password' (with a checkmark), 'Confirm Password', and 'Password Reset Email'. Below the fields is an information icon and a message: 'To begin config password. password car characters. Night Owl recommends that you write down your password and store it in a secure location. Include a recovery email so you can reset your password if you lose or forget it. User name will be 'admin'. You can add more users after completing the Startup Wizard.' At the bottom are two buttons: 'Previous' and 'Next'. An on-screen keyboard is visible over the bottom half of the screen.

Simply click on the text box to open the on-screen keyboard. Use this keyboard to create your admin password and to input your recovery email address.

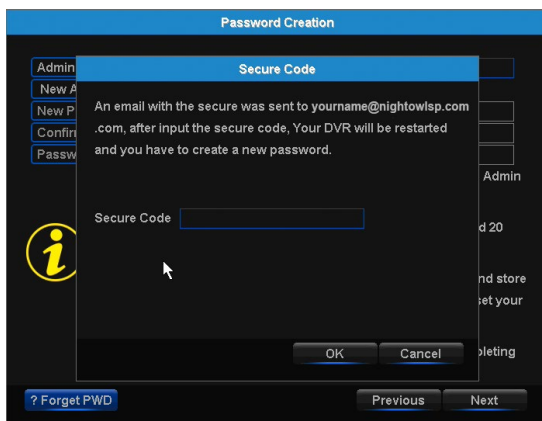


If you have forgotten your admin password, simply click on the Forgot Password tab in the Startup Wizard and a Secure Code will be sent to your recovery email address. Use the Secure Code to restart your DVR and create a new password.

6.1.5 Date and Time Setup

The Date and Time Setup screen of the Startup Wizard will allow you to set the current date and time. You may choose to use Network Time Protocol (NTP) to auto-configure the current date and time.



6.1.6 Night Owl HD

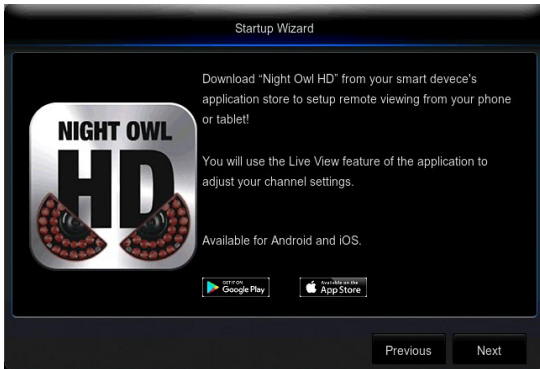


The Night Owl HD screen of the Startup Wizard gives you information on where to find the Night Owl HD App and how it can be used to remotely view your DVR recordings and live stream.



Once you have installed the Night Owl HD app on your smart device and created an account, you can scan the QR code on the Startup Wizard to configure your DVR with the Night Owl HD app!

NOTE: In order to view your system remotely, your DVR must be connected to the Internet.


6.1.7 Password Verification

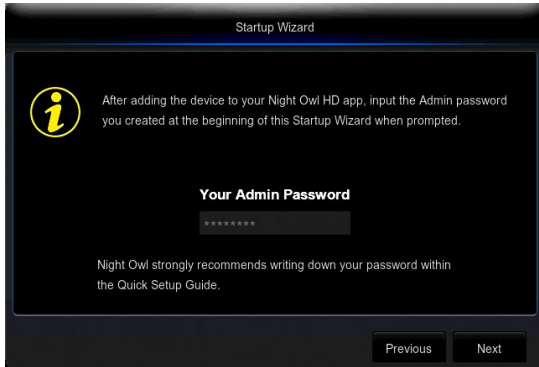

The Password Verification screen of the Startup Wizard will display your admin password.


Night Owl strongly recommends writing down your password within your DVR's Quick Setup Guide.

6.1.8 Camera/Channel Settings

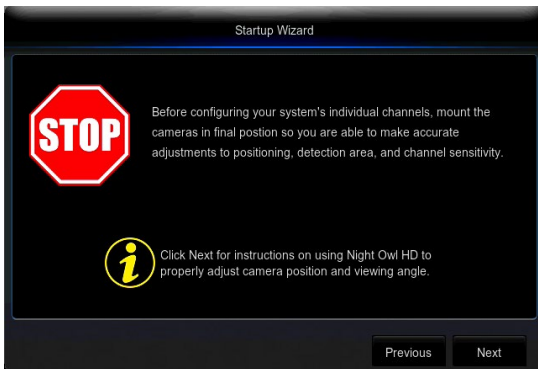


The Camera/Channel Settings screen of the Startup Wizard serves as a reminder to mount your system's cameras in their final position so you can make accurate adjustments to positioning, detection area and channel sensitivity.

6.1.9 Camera Positioning

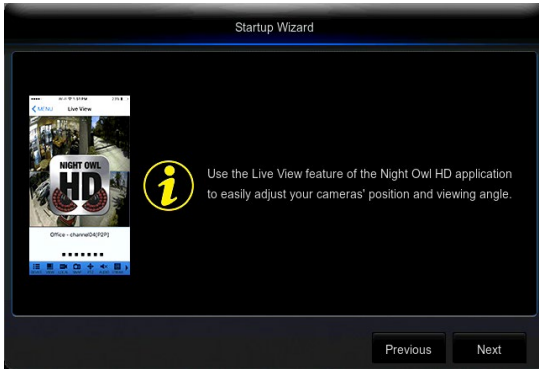


The Camera Positioning screen of the Startup Wizard shows how you can use the Live View feature of the Night Owl HD app to easily adjust your cameras' position and viewing angle.

6.1.10 Channel Configuration

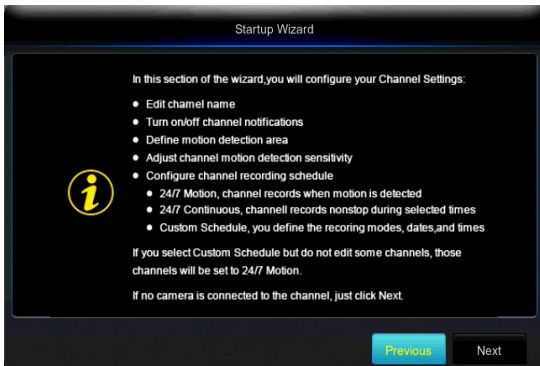

The Channel Configuration screen of the Startup Wizard explains in detail how you will configure your Channel Settings. Please read this screen thoroughly as the following screen will allow you to configure Channel Settings.

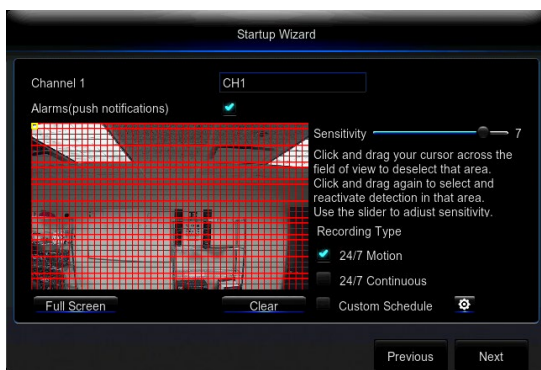


The second Channel Configuration Screen of the Startup Wizard allows you to configure the following Channel Settings:

- Edit channel name.
- Turn on/off channel notifications.
- Define motion detection area.
- Adjust motion sensitivity.
- Configure channel recording schedule.
 - **24/7 Motion:** channel records when motion is detected.
 - **24/7 Continuous:** channel records nonstop during selected times.
 - **Custom Schedule:** you define the recording modes, dates and times.


NOTE: If you select **Custom Schedule** but do not edit some channels, those 3 will be set to **24/7 Motion**. If no camera is connected to the channel, just click **Next**.

6.1.11 Default View

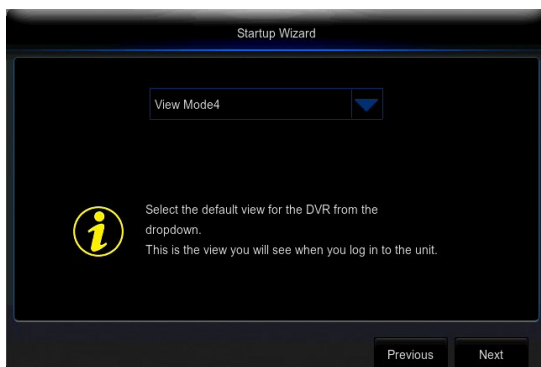

The Default View screen of the Startup Wizard allows you to select the default view of the monitor connected to your DVR.

6.1.12 Helpful Links

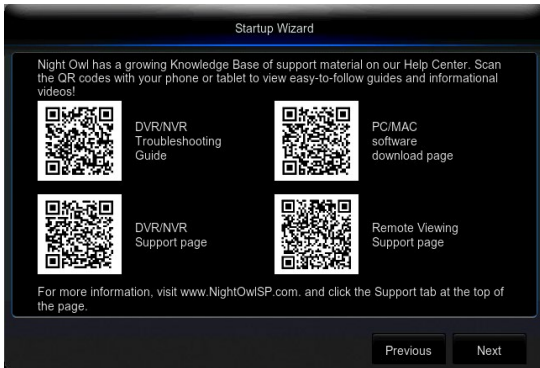


The Helpful Links and Support screen of the Startup Wizard contains QR codes linked to:

- DVR Troubleshooting Guide
- PC/MAC® software download page
- DVR Support page
- Remote Viewing Support page

For more information, visit www.NightOwlSP.com and click the Support tab at the top of the page.

6.1.13 Wizard Complete

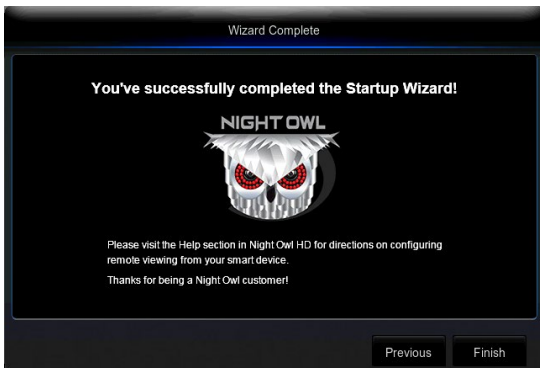


Once you have successfully completed the Startup Wizard, click Finish to begin using your Night Owl DVR.

6.2 Night Owl HD Mobile App

The Night Owl HD mobile app lets you access your DVR remotely with live viewing from your tablet or smartphone. Download our free Night Owl HD application from the iTunes App or Google Play store.



Once you have downloaded Night Owl HD and connected your DVR to your router, you can network your DVR by scanning the QR code which is located on the top of the DVR.

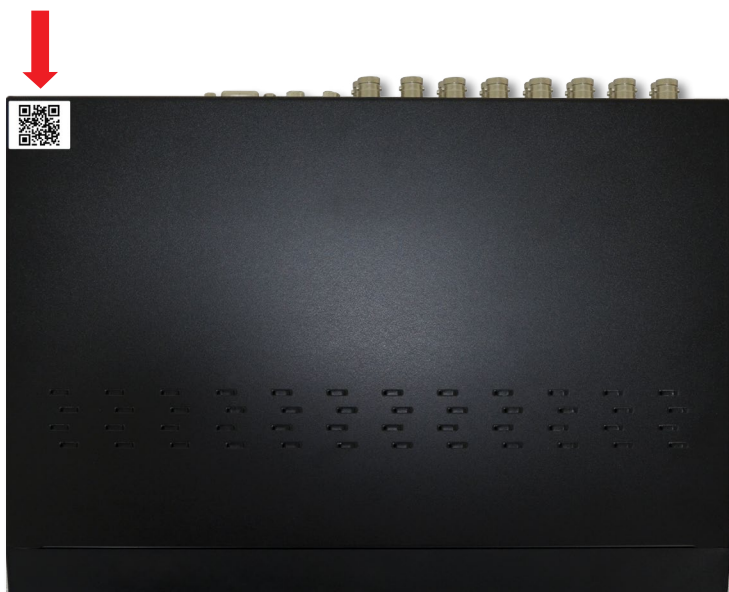


Disclaimer: The QR Code within the image is not active.

6.3 Displays and Icons

The following sections will describe the main screens you will access for login, playback, recording and configuration.

6.3.1 Login Screen

Any time you want to configure or adjust your system settings you will be required to login by entering your user name and password. It's important you save your login info or you won't be able to access your DVR. Be sure to store your user name and password in a safe location. You will need this information to access the main menu.

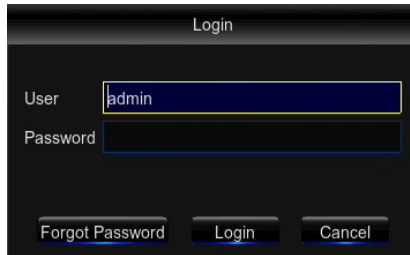The image shows a login screen with a dark background. At the top, the word "Login" is centered. Below it, there are two input fields. The first is labeled "User" and contains the text "admin". The second is labeled "Password" and is empty. At the bottom, there are three buttons: "Forgot Password", "Login", and "Cancel".

User: Enter the User name you created in the Startup Wizard or User Menu.

Password: Enter the Password you created in the Startup Wizard or User Menu. If the password is incorrect you will be prompted to try again. Keep in mind the password is case sensitive and must be 6 to 20 characters long.


Forgot Password: Sends a secure code to your recovery email. Once you input the secure code, your DVR will restart and you will be able to create a new password.

6.3.2 Reset Password

After you select Forgot Password, a message will ask you to confirm that you want a secure (reset) code to be emailed to the email address used during setup. Please select OK.



A message will appear indicating the code was successfully sent. You will then be emailed a 6-digit secure (reset) code.

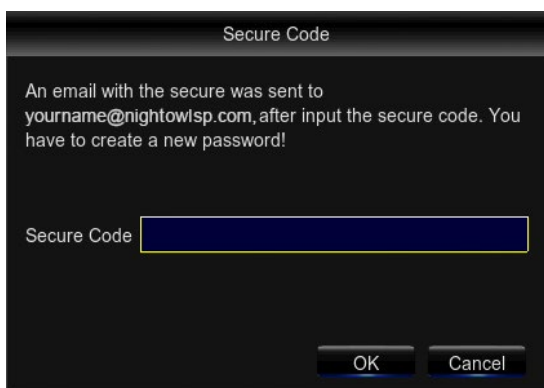

Simply input the secure (reset) code. You will then be prompted to create a new password. You can alter the recovery email address, if necessary.

6.3.3 Live View (All Channels)

After you have completed the Startup Wizard, you will be directed to the Live View screen. Each time the DVR is accessed or powered on, the Live View screen will appear, as it is the default display mode of the DVR. From this screen, you can watch live feed from your cameras and make various adjustments. You will be able to rearrange the channel order by left clicking and dragging individual channels to other locations in the on-screen layout. You can also move the Date and Time display by left clicking and dragging the display to other areas of your screen. This chapter will cover the Live View status icons and menus used to control and manage your DVR



1. **Motion Detection Recording Icon:** Indicates that the DVR has sensed motion and is recording this particular channel.
2. **DVR status Recording Icon:** Indicates the DVR is currently recording video from this camera triggered by a scheduled recording.
3. **Motion Detection:** Indicates that motion detection has occurred on this channel.
4. **PIR Icon:** Indicates the DVR is detecting passive infrared within this camera's detection range.
5. **Camera Name:** Channel name.
6. **Date and Time:** Displays the system's date and time.

NOTE: No Signal indicates that no compatible camera is connected to this channel.

6.3.4 Right Click Menu


To display this menu, simply right-click on your mouse while in Live View.




1. **Menu:** Access the main menu to configure or adjust settings.
2. **Lock Screen:** Manually locks or unlocks your screen. Once the screen is locked, you will need to enter your user name and password to regain access.
3. **Quad View:** 4 channel viewing layout.
4. **9-Channel View:** 9 channel viewing layout.
5. **12-Channel View:** 12 channel viewing layout.
6. **16-Channel View:** 16 channels viewing layout.
7. **Multi-View:** Various layout options for viewing multiple channels at once.
8. **Auto Sequence:** Start/Stop the slideshow sequence of each channel.
9. **Volume:** Mute or adjust the system volume.
10. **PTZ:** Opens the Pan, Tilt, Zoom (PTZ) menu. This function will only work when a PTZ camera is connected to your DVR.
11. **Cruise:** Starts/Stops the cruise function of your PTZ camera.
12. **Picture-in-Picture (1):** View channel 1 with an inset window showing another channel.
13. **Playback:** Access your system's recording/playback menu and functions.
14. **Info:** Access your DVR's Information.
15. **Startup Wizard:** Begins the Startup Wizard.

6.3.5 Menu Screen


Access the main menu by selecting the Menu Icon on the Live View bar.



Within the menus, you will be able to access settings and parameters for all aspects of your DVR system.

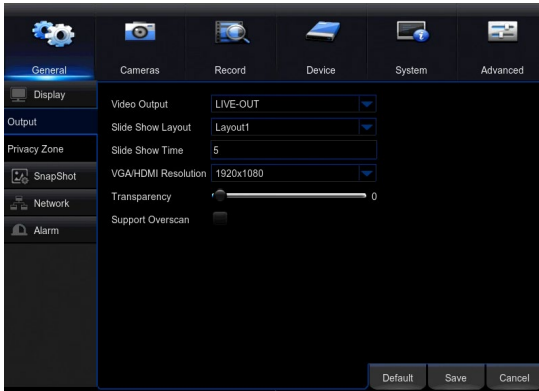


1. **General Menu:** Configure display and network settings.
2. **Cameras Menu:** Access channel display, color settings, encode settings and motion record settings.
3. **Record Menu:** Setup or modify general recording, triggered events and recording settings. Access recordings playback.
4. **Device Menu:** Monitor available HDD space and access PTZ settings.
5. **System Menu:** Access general settings such as timestamp displays, user access, system info and access logs.
6. **Advanced Menu:** View and change maintenance settings, upgrades and HDD alerts.

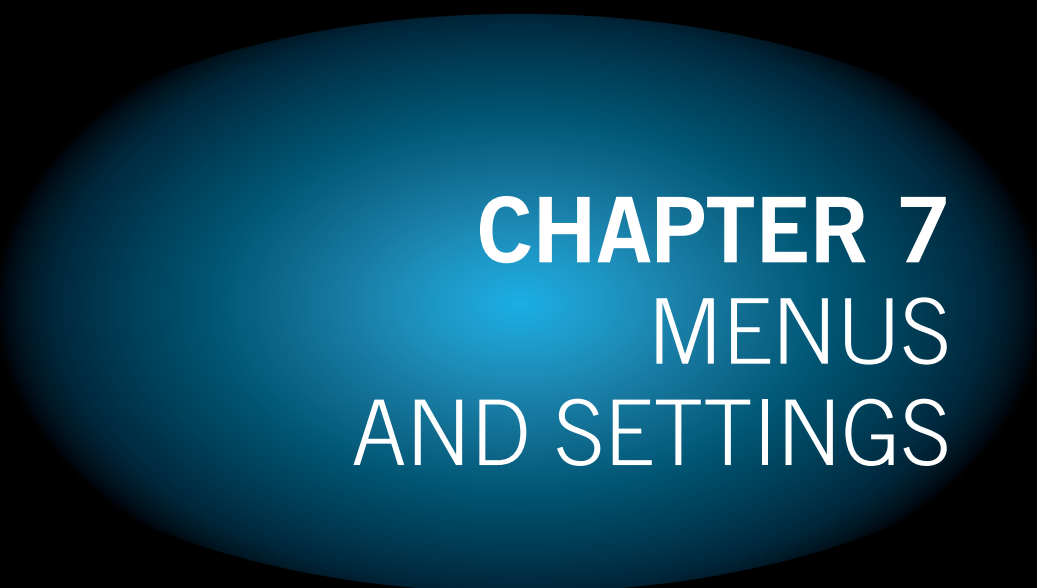


CHAPTER 7

MENUS AND SETTINGS

Chapter 7: Menus and Settings

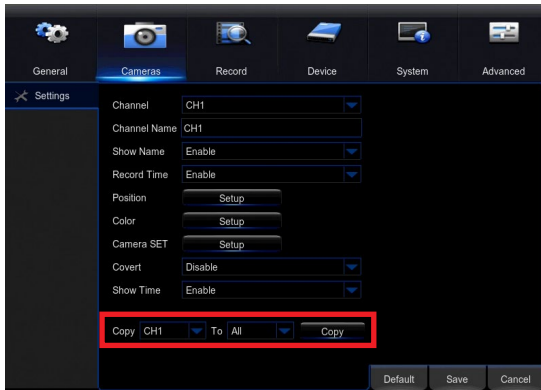

Some menu screens will allow you to copy similar settings to multiple channels. Choose the channel you would like to copy information from in the first drop-down box (Copy), then select the channel you would like to copy the information to from the second drop-down box (To). Click Copy when the proper channels have been chosen.

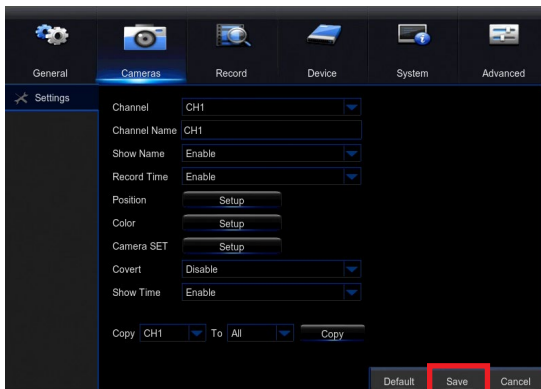


Be sure to click Save to save all changes you make in the menus. If you do not save the changes, they will not be applied. You can also select the Default button on any page to restore default settings for those parameters.

7.1 General Menu

The general menu will allow you to access display and network settings for your DVR system.

7.1.1 Display

7.1.1 (a) Output

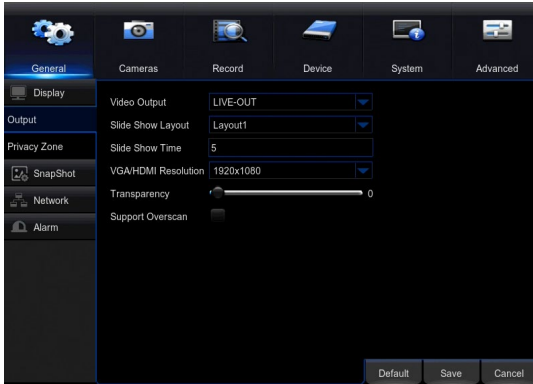

Video Output: Defaulted to LIVE-OUT.

Slide Show Layout: Set to view channels in sequential mode.

Slide Show Time: Adjust the length of time that each channel is displayed during the sequential view. To begin the auto sequence feature, click on the Auto Sequence icon which is located on the quick access bar.


VGA/HDMI Resolution: Optimize the display resolution to best fit your TV/Monitor. By default, the optimal resolution option will be selected automatically by the DVR.

Transparency: Modify the menu transparency when displayed on the screen.

Support Overscan: Select this option if using a TV/Monitor that overscans (crops) the DVR footage.

7.1.1 (b) Privacy Zone

Create or modify up to 4 privacy zones per channel. These zones will not be visible to the cameras in Live View or during any recording

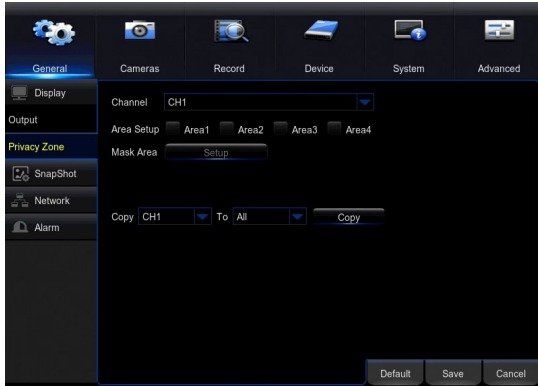

Channel: Choose which channel to apply a privacy zone to.


Area Setup: Select the number of masks you would like to create or modify.

Mask Area: A single Live View of the selected channel will be displayed with the number of Areas selected in the previous line. Select, drag and resize each area by left clicking the mouse to mask areas on camera that you do not want visible while recording or monitoring. Once the area(s) are selected, right-click to return to the menu.

7.1.2 SnapShot

7.1.2 (a) SnapShot

Turn channel SnapShot capabilities on or off.

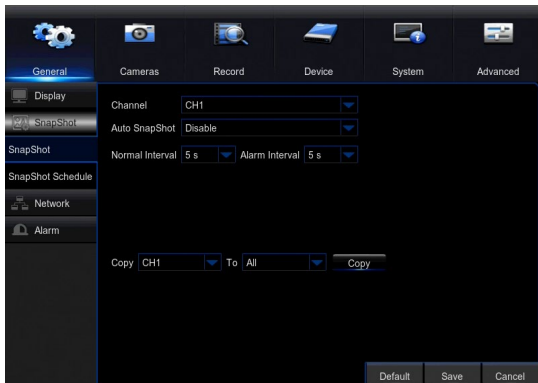

Channel: Select channel to edit.


Auto SnapShot: Enable/Disable SnapShot feature on selected channel.

Normal Interval: Time in between SnapShots in seconds for normal recording.

Alarm (Motion) Interval: Time in between captures in seconds for motion recording.

7.1.2 (b) SnapShot Schedule

Set parameters for SnapShot situations. For example, from this menu you can configure your camera on channel one to SnapShot from 1pm-9pm (Scheduled) and the remaining cameras to begin capturing only when motion is detected (Motion).

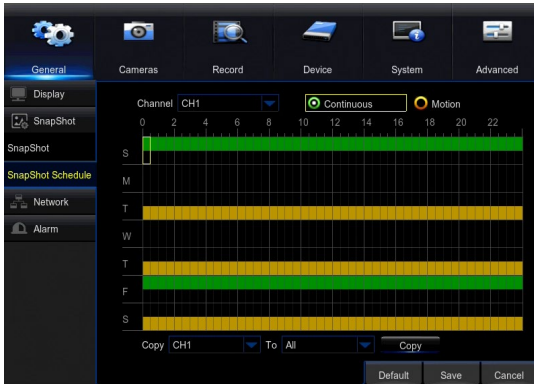


7.1.3 Network

ADVANCED

Find network values and optimize connectivity based on your Internet connection. In most cases the values should populate automatically once your DVR is connected to the Internet. The values in this section should only be adjusted if you are an advanced user and have extensive experience in device networking.

7.1.3 (a) Main

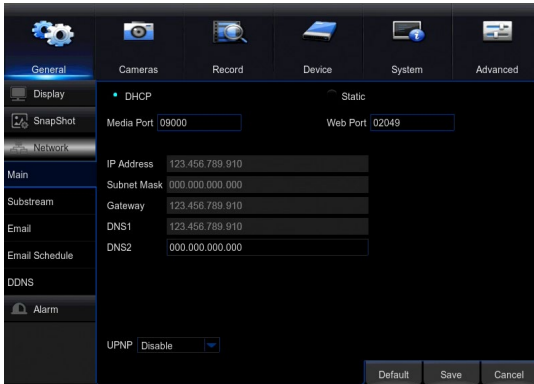

DHCP: The most common network connection type. These values will be gathered automatically from your ISP when connected.

Static: Modify these values if you are using a static IP address. Information can be obtained from your router and ISP.

Media Port: Allows access to your DVR from a mobile device. The default value of 9000 should generally be used for most cases.

Web Port: Allows access to your DVR with your computer through your LAN or the Internet. In most cases the default value of 80 will provide the most optimal connectivity.

IP Address: Network address of the connected DVR.

Subnet Mask: The range of IP addresses that can be found in the network. This should always be set to the default address 255.255.255.000.

Gateway: The connection between two networks. This should always be the IP address of the connected router.


DNS1: Primary Domain Name System server address.

DNS2: Secondary Domain Name System server address.

UPNP: *Enable* or *Disable* Universal Plug and Play abilities depending on your network device capabilities.

7.1.3 (b) Substream

Configure or optimize the video quality of your Live View.

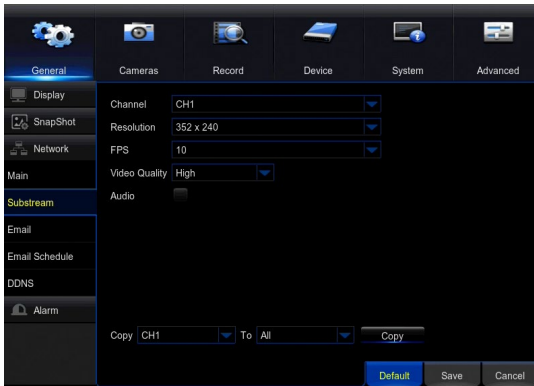

Channel: Select the channel you would like to configure.


Resolution: Choose your desired resolution for the selected channel.

FPS: Increase or decrease the frames per second of the streaming video depending on your connection speed. A higher FPS will result in more data transfer but smoother video. A lower FPS will eliminate most lag but at the expense of video quality.

Video Quality: Determine the quality of your video with this selection.

Audio: Click the tick box to record sound if your camera is audio enabled. Not all cameras are audio enabled; audio enabled cameras will have a white RCA connector to transmit the audio signal.

7.1.3 (c) Email

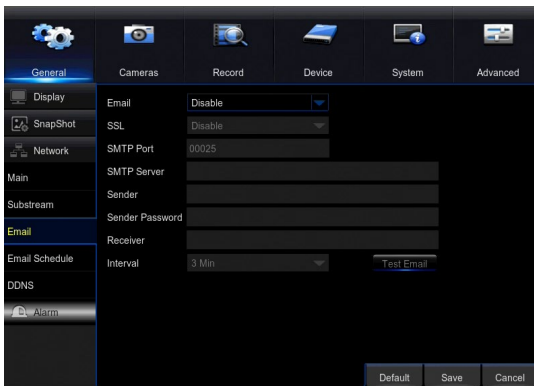


Email: *Enable* or *Disable* email alerts based on your alarm settings.


- SSL:** *Enable* or *Disable* to send encrypted email alerts.
- SMTP Port:** The access point for your email determined by your email service provider.
- SMTP Server:** This is the mail server address of your email provider. This information is determined by your email provider.
- Sender:** The email address that will send email alerts.
- Sender Password:** The password for the email address provided in *Sender*.
- Receiver:** The email address that will receive the email alerts.
- Interval:** Set the duration between sending emails for multiple alerts.

7.1.3 (d) Email Schedule

Choose when alert emails can be sent. Select *Motion* or *System Event* above the calendar and click the corresponding green or red boxes; you can highlight multiple boxes by left clicking and dragging. Highlighted boxes represent days and times in which emails will be sent. Motion refers to alerts sent when cameras are triggered by motion and System Event refers to events such as video loss or memory conflicts.

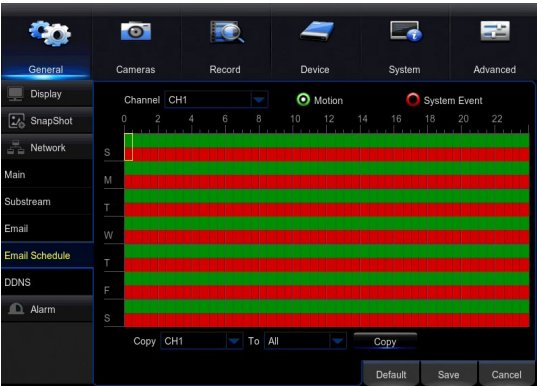

7.1.3 (e) DDNS

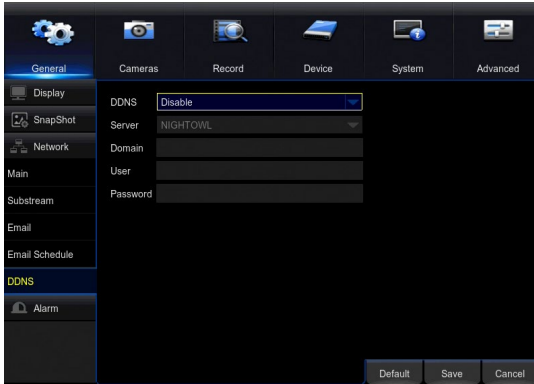

DDNS: *Enable* or *Disable* DDNS service to view your DVR from a computer.

Server: Set to the *NIGHTOWL* server when using the Night Owl free domain name server.

Domain: Set to the domain name you created when registering your DDNS.


User: The User ID created during the DDNS registration process.

Password: The password created during the DDNS registration process.

7.1.4 Alarm

7.1.4 (a) Motion

Configure the motion alarm settings for your DVR system.

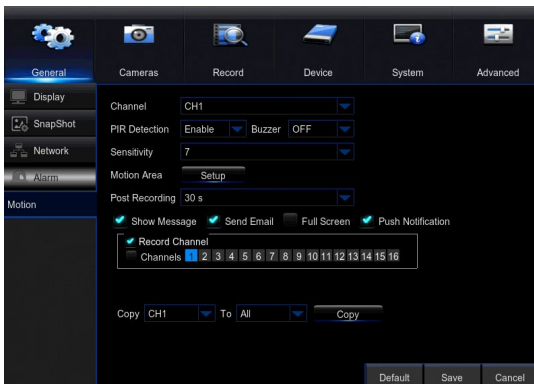

Channel: Select the channel you wish to configure motion alarm settings for.

PIR Detection: *Enable* or *Disable* PIR detection. By default, cameras equipped with PIR technology have PIR Detection enabled. However, you may elect to use the camera as a standard motion detection camera.

Buzzer: Enable an audible alarm when the PIR sensor detects heat.

Sensitivity: Adjust the sensitivity of the motion sensor. A lower setting will require more movement in the camera's field of view for a recording to be triggered.

Motion Area: Selecting Setup will allow you to configure which areas in the cameras field of view will and will not detect motion. Red boxes denote areas that will detect motion and uncolored boxes denote areas that will not. When finished, right click to return to the menu.

Post Recording: Determine how long you would like the camera to continue recording after the event which triggered the recording has ended. You can choose between 30 and 300 seconds.

Show Message: Checking this tick box will result in a red "M" appearing on-screen when motion is detected while in Live View.


Send Email: Checking this tick box will result in an email alert being sent when motion is detected. See section 7.1.2 for email setup and configuration.

Full Screen: Checking this tick box will result in the selected channel going to full screen when motion is detected.

Push Notification: Checking this tick box will result in push notifications being sent to your mobile device when motion is detected on the selected channel. By default, this setting is enabled.

Record Channel: This option allows you to set other cameras to begin recording when motion has been detected on another camera. For instance, if you are on Channel 1 (Channel field) you can set Channel 2 and 3 to begin recording when motion is detected on Channel 1.

7.1.4 (b) Motion Area Setup

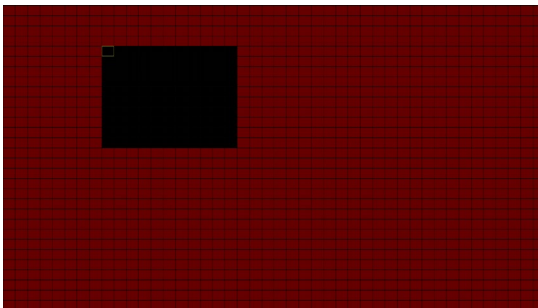

This system uses both motion sensors and infrared sensors to ensure the number of false alerts produced are minimal. Current motion detection technology allows

your system to begin recording when a pixel change is detected by your unit. With the incorporation of infrared sensors, now your system must detect both a pixel change and a change in heat in order for your system to record when set to motion. Night Owl utilizes high tech UTC cabling which sends a signal from the camera to the DVR. If configured, the DVR will then send a push notification out to your Smart Device which will contain an embedded video clip of the object triggering the motion and infrared sensors.

In order to set the PIR Detection Area for your PIR camera, first login to your DVR's Main Menu then navigate to **General > Alarm**. Choose the channel you want to configure from the drop down menu labeled **Channel** and then click the **Setup** button. You will then be directed to the detection area screen.

By default, all squares should be red, indicating the entire field of view is set to detect heat change.


If there is an area within the camera's field of view that you do not want detection to be active, follow the steps below:

1. Click on a square in one corner of the area you don't want to be detected.
2. Drag the mouse over the area you want to block.
3. Release the mouse and verify you have selected your desired area.
4. Right click the mouse and select Save.

7.2 Cameras Menu

Adjust or modify individual camera settings connected to your DVR.

7.2.1 Settings

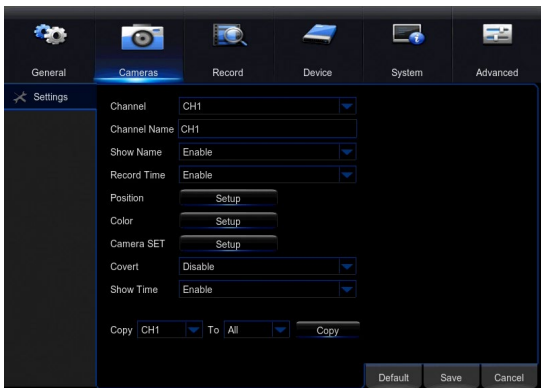

Channel: Select the channel you want to configure.

Channel Name: Create a name for the selected channel. This name will be displayed on-screen during Live View and Playback.

Show Name: Display the channel's name on screen.

Record Time: *Enable* or *Disable* the recording time display on-screen during playback mode.

Position: Change the position of the Channel name while in Live View. This only works for the channel name, not for the date and time.

Color: Click Setup to access a sub-menu to adjust the colors of the selected channel. In this sub-menu you can adjust the Hue, Brightness, Contrast and Saturation of the image.

Camera Set: Change the camera technology. With this feature, you can make the video compatible with other vendor's cameras.

Covert: *Enable* or *Disable* the display of this channel. Enabling covert mode will not affect the channel's recording functions, it will only block the channel while viewing in live view mode.

Show Time: *Enable* or *Disable* the on-screen time stamp during live view mode.

7.3 Record Menu

7.3.1 Search

Search and playback all recorded video from this menu. Choose your desired date and times from the options below, then click Play to view recorded video. Right-click to exit back to the menu screen.



Channel: Select the channel to search for recordings.

Date: Select the month and year to search for event footage.

Playback Channel: Choose the desired channel to view footage from.


Start Time: Set the initial time parameter for your video search.

End Time: Set the end time parameter for your video search.

Play: Select to open the video playback screen.

7.3.1 (a) Video Playback


Search and playback all recorded video from this menu. Choose your desired date and times from the options below, then click Play to view recorded video. Right-click to exit back to the menu screen.

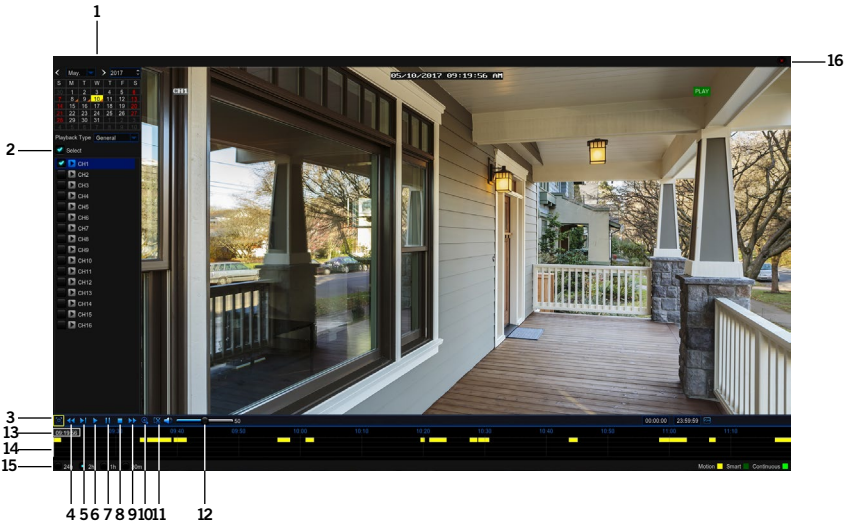

1. **Calendar:** Indicate the date to playback video.
2. **Channel Selection:** Choose the channels to display on-screen.
3. **Full Screen:** Hides the Calendar and Channel Selection panels.
4. **Rewind:** Rewinds the recorded video.
5. **Slow Forward:** Forwards the video at a slower speed.
6. **Play:** Plays video starting at the indicator on the timeline.
7. **Pause:** Pause the recorded video.
8. **Stop:** Stop the recorded video.
9. **Fast Forward:** Fast forward frame-by-frame of the recorded event.
10. **Zoom:** Click the icon and select the area on-screen to zoom in.
11. **Clip/Save:** Click once to set the start point of the video you would like to save. Press the icon again to select the end of the video you would like to save then choose whether you would like to save as an *H.264* or *AVI* format.
12. **Volume Scale:** Adjust the volume of the video in the selected channel(s).
13. **Start Time:** Indicate the date to playback video.
14. **Calendar:** Indicates the beginning of the timeline on the selected Calendar date.

15. Timeline Length (24h, 2h, 1h, 30m): select the duration of the on-screen display of the timeline.

16. Exit: Double right click the mouse or click on the X to exit the playback screen.

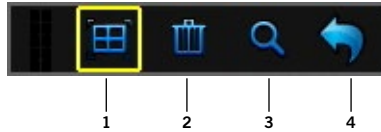


Smart Detection Playback: Select a target area to highlight on the timeline.

1. **Select All:** Sets the entire field of view as the target area.
2. **Clear All:** Clears all selected target areas.
3. **Set Area:** Sets the selected area as the target.
4. **Back:** Goes back to the playback window.

7.3.2 Backup

Search for video from triggered events and quickly backup the video files to a USB flash drive for future reference.

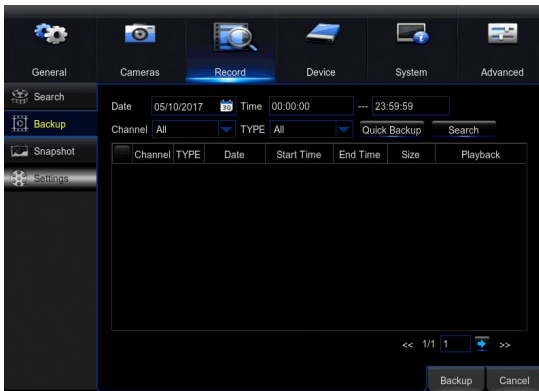

Date: Select the date to search for event footage.

Time: Choose a start and end time that the event happened.

Channel: Pick the channel(s) with the desired video.


Type: Select from *All*, *Normal*, *Motion* or *Manual* video.

Search: Once the parameters are set, click this button to retrieve video from the specified time period. You can save video files in H.264, AVI or mp4 format.

Quick Backup: Check the tick boxes to the left of the found video clip(s) and click this button to save that video to a USB Flash Drive.

7.3.3 SnapShot

Search for SnapShot(s) from triggered events and quickly backup the video files for future reference.

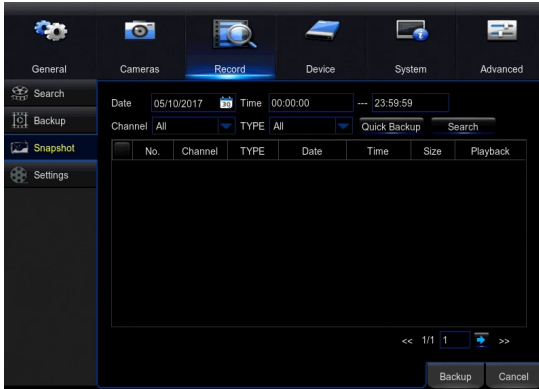

Date: Select the date to search for event footage.

Channel: Pick the channel(s) with the desired SnapShot.

Type: Select from *All*, *Continuous*, *Motion* or *Manual* SnapShots.

Search: Once the parameters are set, click this button to retrieve SnapShot from the specified time period.


Quick Backup: Check the tick boxes to the left of the found SnapShot(s) and click this button to save that video to a USB Flash Drive.

7.3.4 Settings

View or modify general recording settings for your DVR system.

7.3.4 (a) Record Schedule

Set parameters for recording situations. For example, from this menu you can configure your camera on channel one to record from 1pm–9pm (Scheduled) and the remaining cameras to begin recording only when motion is detected (Motion).

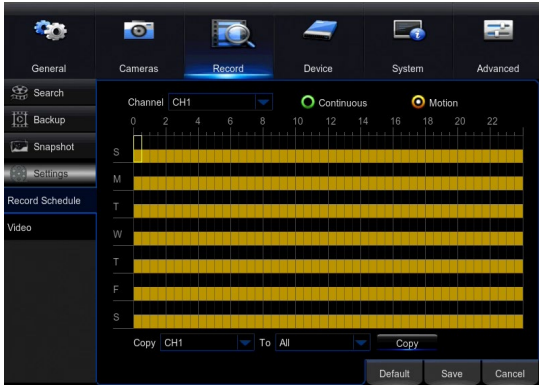


Channel: Select the channel to configure the recording schedule.

Continuous Record: Select this option to set the schedule for continuous recording. Once selected, highlight the boxes corresponding to the day and times that the channel should be recording. Click and drag to highlight multiple boxes green.

Motion Record: Select this option to set the schedule for motion-activated recording. Once selected, highlight the boxes corresponding to the day and times that the DVR should record when motion is detected. By default, motion recording is always on.

7.3.4 (b) Video

Configure the video settings to optimize your connection.

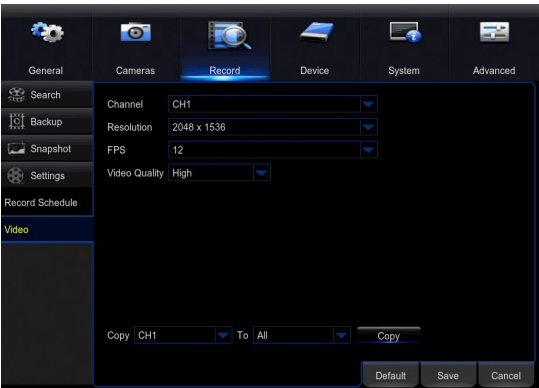

Channel: Select the channel you would like to configure.

Resolution: Choose between *960H* (960 x 480), *720p* (1280 x 720), *1080p* (1920 x 1080) or *3MP* (2048 x 1536) resolutions based on your TV or monitor capabilities.

FPS: Increase or decrease the frames per second of the streaming video depending on your connection speed. Higher FPS equals better video quality. If experiencing lag or stutter, lower the FPS.

Video Quality: Determine the quality of your video with this selection.

7.4 Device Menu

7.4.1 HDD

Check available memory on your DVR HDD and set recording parameters to optimize storage.



Select: If multiple drives are installed, choose the HDD you would like to customize.


Overwrite: By default, the *Auto* setting will overwrite the earliest footage once the HDD is full. Choose one of the other options to overwrite footage at the end of the desired time duration, starting with the earliest data. *Off* will record until the HDD has reached capacity.

Format HDD: Click this button to format the selected drive. Keep in mind, formatting the HDD will erase all video files from the HDD.

7.4.2 PTZ

7.4.2 (a) Settings

Configure settings on your DVR to control a PTZ enabled camera.

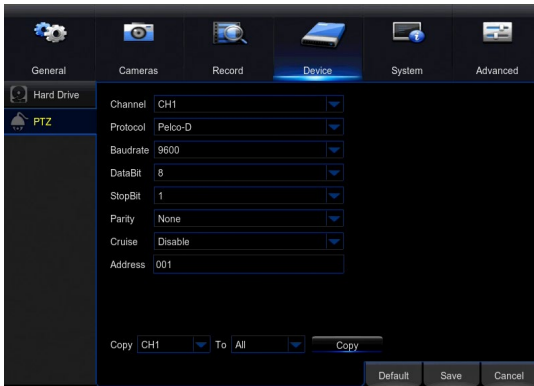

Channel: Choose the channel with a PTZ enabled camera. Not all cameras are PTZ enabled.

Protocol: Is the type of PTZ data protocol that the DVR will use to control the PTZ cameras. It is necessary to change this only for third party PTZ Camera compatibility. The Default Value for Night Owl's PTZ camera is **PelcoD**.

Baudrate: Indicate the frequency of communication to the PTZ camera. We recommend leaving the default setting which is 9600.

DataBit: Select the amount of data to send during each transmission. 8 bits is standard for all modern data transmissions.

StopBit: Select the amount of extra data to send each time a direction is sent to the camera. The stopbit serves as a buffer between commands and should be 1 (by default) when utilizing Night Owl's AHD PTZ camera.

Parity: Detects corrupt commands sent to and from the PTZ camera. This should generally be left Disabled.

Cruise: *Enable* or *Disable* the PTZ cruise function, which allows the camera to automatically scan the area periodically with no manual input.


Address: Enter an ID number for the PTZ camera, greater than 0. If using multiple PTZ cameras, ID numbers cannot be the same.

7.5 System Menu

7.5.1 General

Set or adjust basic DVR settings such as the time, date and language.

7.5.1 (a) Settings

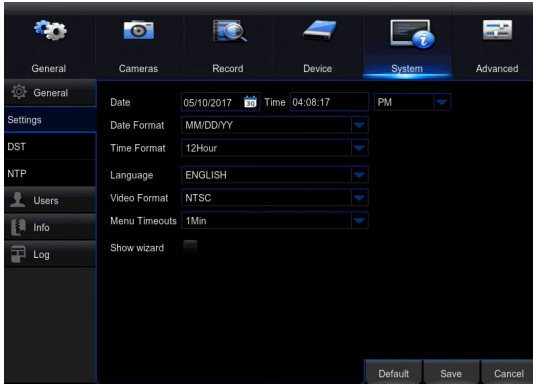

Date/Time: Manually set the date and time of your DVR.

Date Format: Choose the display format for the date. You can select Month/Day/Year, Year/Month/Day or Day/Month/Year.

Time Format: Select between a *12Hour* or *24Hour* display.

Language: Pick between *ENGLISH*, *SPANISH* or *FRENCH* language preferences.


Video Format: *NTSC* or *PAL* formats are available to choose from. *NTSC* is the standard for video in North America.

Menu Timeouts: Select the duration of time for an inactive menu to be displayed on-screen.

Show Wizard: Check this box if you would like the Startup Wizard to start whenever the DVR reboots.

7.5.1 (b) DST

Configure Daylight Savings Time settings.

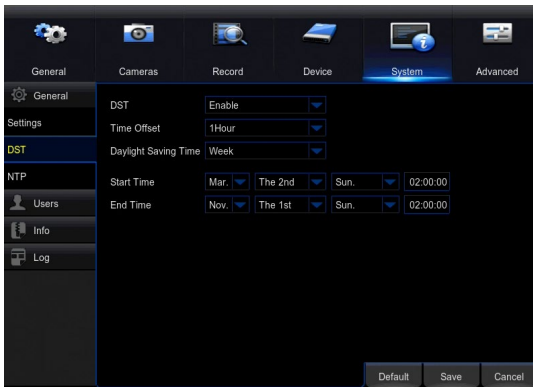

DST: *Enable* or *Disable* the Daylight Savings Time feature.

Time Offset: Choose the amount of time (*1Hour* or *2Hours*) to offset if DST is enabled.


Daylight Saving Time: Indicate whether you would like this feature to be applied the week of or an exact date.

Start Time: Select the date and time to apply the DST offset.

End Time: Select the date and time to remove the DST offset.

7.5.1 (c) NTP

Sync your DVR to the Network Time Protocol standard time and date.

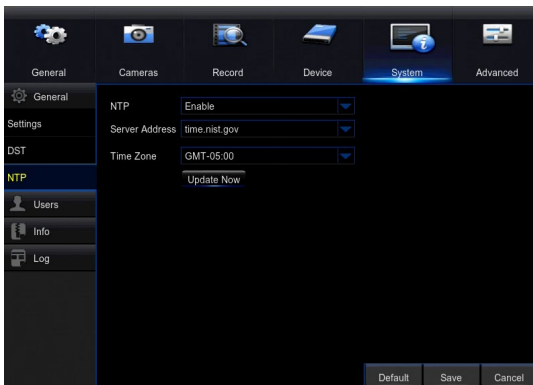

NTP: *Enable* or *Disable* the NTP sync feature.


Server Address: Choose the NTP server in which to sync the date and time with.

Time Zone: Indicate your current or desired time zone.


Update Now: After selecting the above options, click this button to apply the settings.

7.5.2 Users

Create and modify user permissions.

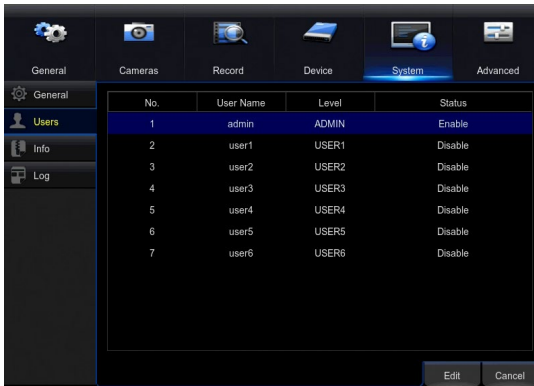

Edit: Select an existing user from the list to change the *User Name*, *Enable* or *Disable* password access, or create a new *Password*.

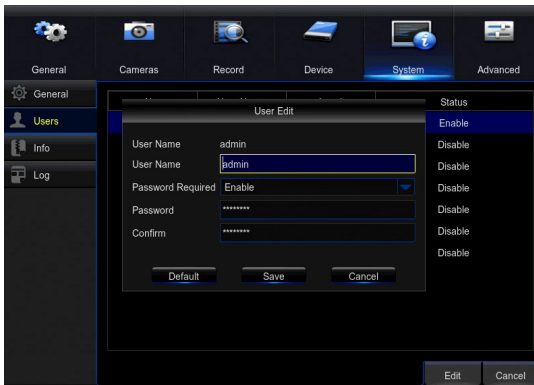

Permission: Select a new user profile (e.g. user1) and press the Permission button to select which menus, settings, and playback/recording functions are available to that specific user and on which channels. *All* will give that user basic admin settings.



7.5.3 Info

View your DVR system's information and specifications at a glance. This menu will provide crucial device and network information to allow manual reconfiguration of your mobile application if needed. Keep in mind you can also scan the QR code on this screen using your Night Owl HD mobile application to quickly reconfigure your mobile device via our Owl Scan feature.

7.5.3 (a) Info



Device Name: Create a unique device name for easy reference.

Device Type: Product's model number.

Hardware Version: Your current hardware version.

Software Version: Your current software version.

IE Client Version: The current IE client version.

IP Address: The current DVR network address.

MAC Address: The DVR media access control address on the network.

HDD Capacity: The max capacity of installed hard drives.

Video Format: Your current video recording format.

Media Port: By default, should be left at 9000.

Web Port: By default, should be left at 2049 or 2051.

P2P ID: The ID of your Peer to Peer (P2P) connection.

7.5.3 (b) Channel Info


Displays an overview of the current video settings for all channels. View alias, state, mainstream/substream playback information, mobile support, motion detection, and privacy zone information. The settings on this page cannot be edited.



Channel	Alias	State	Mainstream	Substream
CH1	CH1	Enable	2048x1536, 12Fps, 4096Kbps	352x 240, 10Fps, 320K
CH2	CH2	Enable	1920x1080, 12Fps, 4096Kbps	352x 240, 10Fps, 320K
CH3	CH3	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH4	CH4	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH5	CH5	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH6	CH6	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH7	CH7	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH8	CH8	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K
CH9	CH9	Enable	1920x1080, 15Fps, 4096Kbps	352x 240, 10Fps, 320K

7.5.3 (c) Record Info


Displays an overview of the current record settings for each available channel. View record state, stream type, frames per second (FPS), bitrate, and resolution information. The settings on the page cannot be edited.

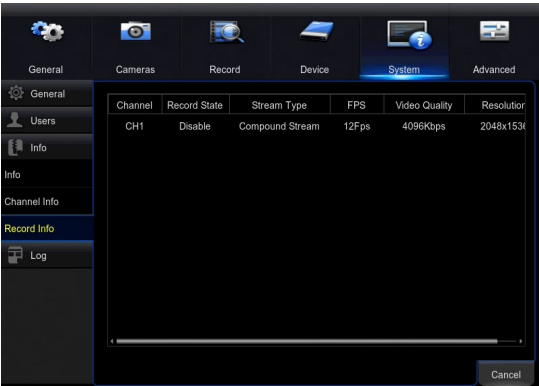

Channel	Record State	Stream Type	FPS	Video Quality	Resolution
CH1	Disable	Compound Stream	12Fps	4096Kbps	2048x1536

7.5.4 Log

Search for logs of all events and notifications on the DVR to playback or backup files.

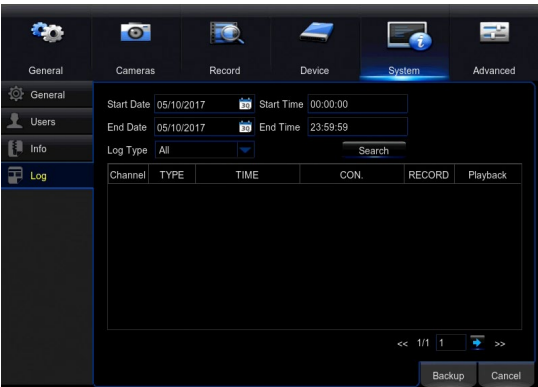

Start Date: Choose the initial date of your log search period.

Start Time: Choose the initial time of your log search period.

End Date: Choose the end date of your log search period.

End Time: Choose the end time of your log search period.


Log Type: Select the type of event log that you would like to Search for. Each choice corresponds to an action or event that was triggered and noted within the system.

7.6 Advanced Menu

Configure additional settings related to maintenance, hard drive space and upgrades.

7.6.1 Maintain

Adjust settings related to default user access and reboot schedules.

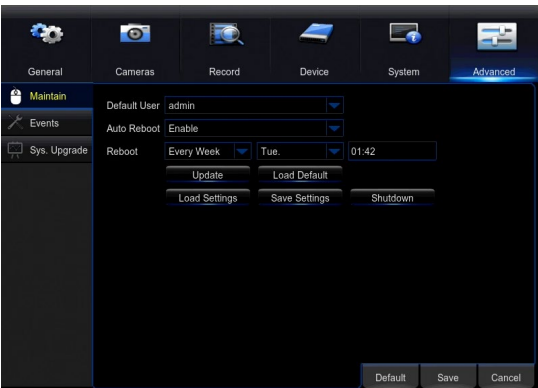

Default User: Choose a user to default at the login screen at startup.

Auto Reboot: *Enable* or *Disable* a scheduled reboot.

Reboot: Set the frequency of reboots if this feature is enabled.

Update: If any of the above settings were changed, click this button to save the new parameters.

Load Default: Revert to the standard reboot schedule.


Save Settings: Save reboot settings to a USB flash drive.

Load Settings: Load previously saved settings from a USB flash drive.

Shutdown: Reboot the DVR.

7.6.2 Events

Configure notification settings for other triggered events not related to motion detection such as disk error, disk full or and/or video loss.

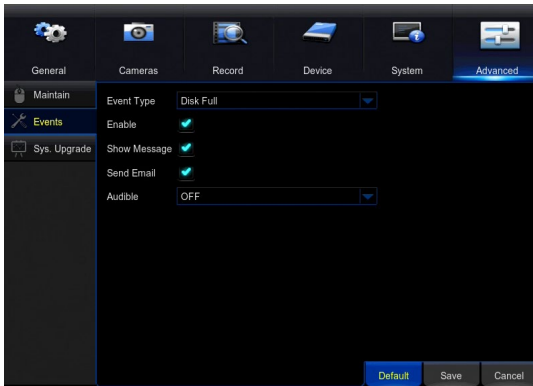

Event Type: Choose the type of event you would like to create a notification for. *Disk Full* means you will receive a notification if the HDD is full. *Disk Error* refers to the status of the HDD and will notify you if it crashes or has become corrupt. *Video Loss* is the absence of video due to power loss disconnection.

Enable: Turn notifications on or off for the selected Event Type.


Show Message: Enable an icon to be displayed in Live View when the selected Event Type is triggered.

Send Email: Send an email notification when this Event Type is detected.

Audible: Turn an audible buzzer on for a duration of time to alert you when this *Event Type* happens. Choose *OFF* to disable this feature. You can select in between 10 and 60 seconds.

7.6.3 Auto Upgrade

Control settings for auto upgrades of the DVR software.

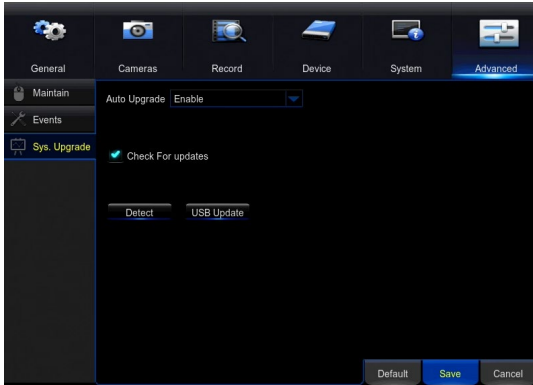

Auto Upgrade: *Enable* or *Disable* the auto upgrade feature. Firmware updates will be detected automatically when this feature is enabled. The default selection for the auto upgrade feature is enable.

Check For Updates: Check this tick box to periodically check for updated software versions.

Detect: Click this button to query your DVR and notify you if you are current or need to be updated.

Upgrade: If an upgrade is detected, click this button to download and install the new version.

CHAPTER 8

GLOSSARY

Chapter 8: Glossary

DDNS: Dynamic Domain Naming System. Method for automatically updating hostnames, address or other information like a URL on a given name server.

DHCP: Dynamic Host Configuration Protocol. A network protocol that allows a server to automatically assign a device and IP address.

IP: Internet Protocol. Protocol for standard communications across the Internet.

ISP: Internet Service Provider. An organization that provides services for accessing or using the Internet.

PIR: Passive Infrared. Heat-based sensors eliminate most false alarms and only delivers alerts when people, animals or vehicles are detected.

SMTP: Simple Mail Transfer Protocol. Standards used for email transmission.

UPS: Uninterrupted Power Supply. Device used to keep the DVR and cameras powered when the main power supply is lost or disconnected.

UTC (Up the Cable): This new technology allows for PTZ functions to be sent back and forth between the DVR and camera using a standard BNC (Video/Power) cable without the need for a separate port.

XHD: Hi-Definition Analog. Delivering crisp and clear HD images over coaxial cable.

CHAPTER 9

WARRANTY

Chapter 9: Warranty

NIGHT OWL, LLC ("Night Owl") provides the following warranty to the original retail purchaser only (the "Purchaser") with respect to this product (the "Product"):

For a period of one (1) year after the date of sale, the Product shall be free from manufacturing defects in material and workmanship. In the event that the Product is defective, the Purchaser must return the Product at Purchaser's cost with the original proof of purchase receipt. In its sole discretion, Night Owl will either repair or replace the Product at no additional cost to the Purchaser. Any replacement Product (or parts) will be covered by the same warranty as the original Product through the expiration date of the original warranty period.

Exclusions

This warranty does not apply to the following parts or upon the following events:

1. Bulbs, LEDs and batteries;
2. The Product was not used or installed in the manner described in the installation instructions;
3. Negligent use of the Product or misuse or abuse of the Product;
4. Electrical short circuits or power surges;
5. Use of replacement parts not supplied by Night Owl;
6. Product is either tampered with, modified or repaired by another service provider;
7. Product has not been maintained in accordance;
8. Accident, fire, flood or other acts of God;
9. Failure to use Night Owl approved accessories;
10. Defects or damages arising by use of the Produce in other than normal conditions (including normal atmospheric, moisture and humidity conditions).

Except as otherwise prohibited by law, this warranty is in lieu of other warranties, express or implied and Night Owl neither assumes no authorizes any person to assume for it any other obligation or liability in connection with the sale or service of the Product.

In no event shall Night Owl be liable for any special or consequential damages arising from the use of the Product or arising from the malfunctioning or non-functioning of the Product or for any delay in the performance of this warranty due to any cause beyond its control. This warranty shall not apply to installation or the removal and re-installation of products after repair.

Night Owl does not make any claims or warranties of any kind whatsoever regarding the Product's potential, ability or effectiveness to prevent, minimize or in any way affect personal or property damage or injury. Night Owl is not responsible for any personal damage, loss or theft related to the Product or to its use for any harm, whether physical or mental related thereto. Any and all claims or statements, whether written or verbal, by salespeople, retailers, dealers or distributors to the contrary are not authorized by Night Owl and do not affect this provision of this warranty.

Returns Under this Warranty

In order to obtain service, please make sure that you have registered your product on-line no later than thirty (30) days after purchase at www.NightOwlSP.com in the warranty registration section or in any other manner described in the instructions.

Disclaimer

Certain uses, publication and/or distribution of video/audio recordings from security cameras and/or audio devices are prohibited or restricted by federal, state and local laws. When enabling and/or using audio recording features with your hidden security camera, be sure to comply with the laws in your country, state and locality.

Mac and Mac OS X are registered trademarks of Apple Inc. Windows, Windows XP, Windows Vista, Windows 7, Windows 8 and Windows 10 are registered trademarks of Microsoft Corporation in the United States and/or other countries.

CHAPTER 10

TROUBLESHOOTING

Chapter 10: Troubleshooting

If a problem occurs, you may be able to easily correct it yourself. The following table describes some common issues and their most likely solutions. Please refer to the table before calling technical support.

Error	Possible Causes	Solutions
System is not receiving power or is not powering up.	Cable from power adapter is loose or is unplugged.	<ol style="list-style-type: none"> 1. Confirm that all cables are connected correctly. 2. Confirm that the power adapter is securely connected to the back of the unit.
	Cables are connected, but system is not receiving sufficient power.	<ol style="list-style-type: none"> 1. Confirm that the system is powered ON (LED indicators on the front should be ON). 2. If the unit is connected through a power bar or surge protector, try bypassing the bar and connecting the power directly to the wall outlet. 3. Confirm that there is power at the outlet. 4. Connecting the power cable to another outlet. 5. Test the outlet with another plugged device (such as a phone charger).
Hard drive is not detected by the system.	Hard drive cables are loose or not properly connected.	Remove the cover and check that the hard drive cables are firmly connected.
	There is no hard drive in the system.	Open the cover and install a 3.5" SATA hard drive.
Hard drive is full (0%) and the unit is no longer recording.	Overwrite is not enabled.	Go to the Device Menu > HDD and ensure that Overwrite is set to Auto .
Mouse not detected by system.	Mouse cable is not firmly connected to the system.	Firmly connect the mouse cable to the USB Mouse port on the front panel.
	Mouse is not connected to the system.	
	System needs to be reset.	Power off the system (disconnect power cable). Firmly connect a USB mouse to the USB Mouse port on the front panel of the system. Reconnect the power cable to the DC 19V port on the rear panel.

Error	Possible Causes	Solutions
There is no picture on selected channels/camera picture is not being displayed.	Camera cables are loose or have become disconnected.	<ol style="list-style-type: none"> 1. Check the camera video cable and connections. 2. Disconnect and reconnect the cable at the system and at the camera. 3. Try moving the camera to another channel or use another cable.
The image on the DVR appears, but does not have sound.	Audio cables are loose or have been disconnected.	Check the AUDIO connection to the DVR.
	Audio channels are disabled.	Left click in Live View to bring up the Volume control and ensure that the channel(s) are not low or muted.
	Volume on external speakers (not included) is low or off.	Increase volume on external speakers (not included).
A “whirring” noise is coming from the system.	Fan is active.	The noise means the exhaust fan is working normal.
The system beeps at startup.		The beep at startup is normal.

CHAPTER 11

USER INFORMATION

Chapter 11: User Information

Be sure to write down all the important information below and place it in a secure location.

General DVR Information

Admin Password: _____

User Password: _____

Mac Address: _____

Component Model Number: _____

Internet Login Information

NOTE: This information can be found within the General Menu tab under Network in your DVR's Main Menu.

Media Port: _____

Web Port: _____

Mobile Port: _____

IP Address: _____

Subnet Mask: _____

Gateway: _____

DNS1: _____

DNS2: _____



CONTACT US

PHONE (English, Spanish & French)

Sales/Technical Support

1.866.390.1303

Live Chat 24/7, 365 days a year

Professional Installation

1.800.806.5513

EMAIL

Sales Support

Sales@NightOwlISP.com

Technical Support

Support@NightOwlISP.com

WEBSITE

24/7 Product Support

- How-To Videos
- Manuals
- Firmware Updates



www.NightOwlISP.com

iPhone, iPad, Mac and Mac OS X are registered trademarks of Apple Inc. Windows, Windows XP, Windows Vista, Windows 7, Windows 8 and Windows 10 are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Rev 170516