

P330

# 4K PoE Security Camera with Smart Detection



White



Black



## Smart Detection

Differentiate people, vehicles, and animals from other trivial things.



## Accurate Alerts

Receive instant alerts once something suspicious is happening.

## 4K

## 4K UHD

Deliver 4K sharp images day and night with rich details.



## Color Night Vision

See through the night in full color with its spotlight on.



## Time Lapse

View long-time processes such as sunrise in a short video.



## Power over Ethernet

Transmit data and power with only one Ethernet cable.



## Local Storage

Save your recordings to a micro SD card of up to 256GB.



## IP67 Weatherproof

Performs well in any weather conditions with its rugged housing.



## Remote Access

Live view your footage anytime anywhere via Reolink App/Client.






## True-to-Life Images in 4K

Capture super sharp 4K videos with mind-blowing details, day or night. Never miss anything important.




## Focus on True Threats

Differentiate people, vehicles, and animals from other objects and send alerts straight to your phone, so nothing important goes unnoticed.

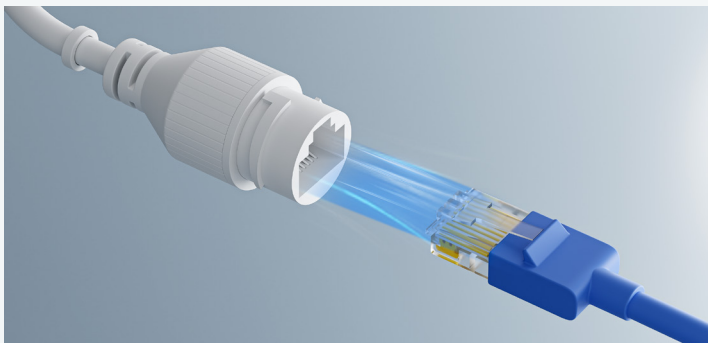


## PoE, Setup in Minutes

Transmit videos and be charged simultaneously via only one network cable. Setup is easier with no messy cables.

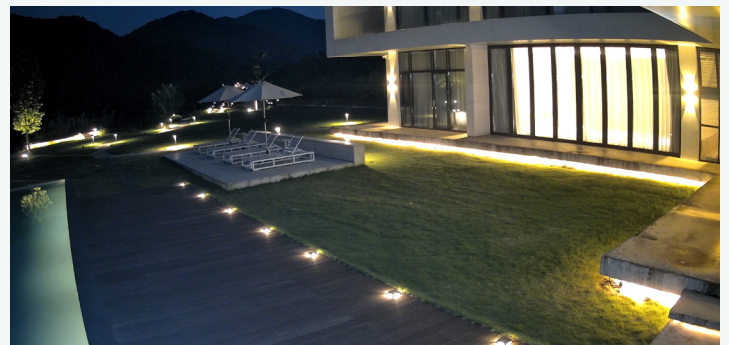

## See Through the Night in Colors

Fuzzy and pixelated night vision is now history. The powerful spotlight that keeps on all night makes the night as colorful as day.

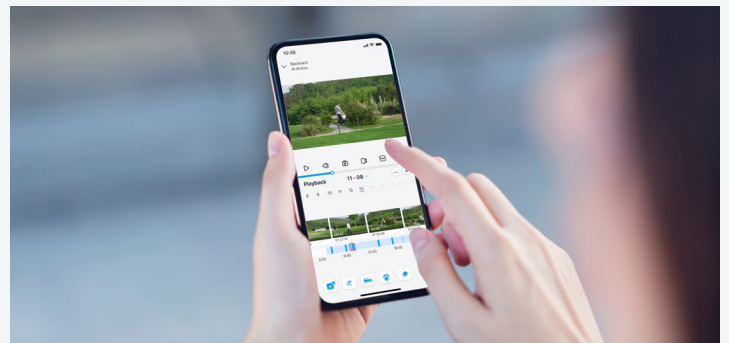


## Your World at Your Fingertips

With a few clicks on Reolink App or Client, watch live feed, be informed of the emergency, replay key moments and more – from anywhere, anytime.



## Gallery

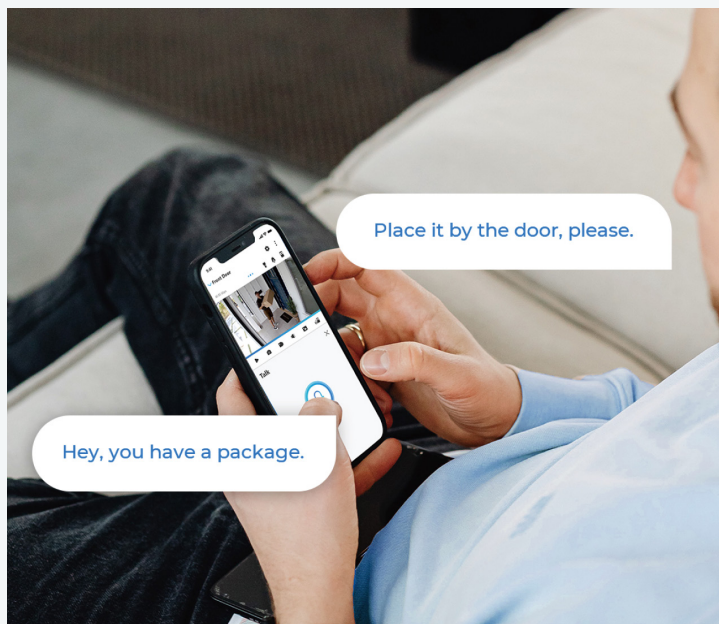

### One App/Client for All Control

Stay connected to your home or business anytime, anywhere.



### Privacy in Your Hands


We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



<b>Model</b>	P330	
<b>Video &amp; Audio</b>	Image Sensor	1/2.49" CMOS Sensor
	Video Resolution	3840x2160 (8.0 Megapixels) at 25 frames/sec
	Lens	f=4.0mm fixed; F=2.0, with IR-cut filter
	Video Format	H.265
	Field of View	Horizontal: 87° Vertical: 44°
	Day & Night	Auto-switching with IR-cut filter
	Infrared Night Vision	30 meters (100ft) (LED: 18pcs/14mil/850nm)
	Color Night Vision	Spotlight: 1pcs
	Audio	Audio recording
<b>Power</b>	POE	IEEE 802.3af, 48V Active
	DC Power	DC 12.0V=1A, <12W
<b>Interface</b>	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps; RJ45
	Storage	microSD card slot (support up to 256GB)
	Audio	Built-in microphone
<b>Software Features</b>	Frame Rate	Mainstream: 2fps - 25fps (default: 25fps) Substream: 4fps - 15fps (default: 10fps)
	Code Rate	Mainstream: 4096Kbps - 8192Kbps (default: 6144Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
	Browser Supported	Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
	Record Mode	Motion-triggered recording (default); scheduled recording; 24/7 recording
	Protocol & Standard	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
	Maximal User Access	20 users (1 admin account & 19 user accounts); support up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
	Smart Home	Google Assistant
<b>Working Environment</b>	Temperature	Operating temperature: -10°C - +55°C (14°F - 131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	IP67
<b>Size &amp; Weight</b>	Dimensions	60 x 66 x 192mm
	Weight	488g
<b>Warranty</b>	Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> .



- |             |                        |                   |
|-------------|------------------------|-------------------|
| 1 Mount     | 2 Metal Aluminum Case  | 3 Daylight Sensor |
| 4 Spotlight | 5 High Definition Lens | 6 IR LEDs         |

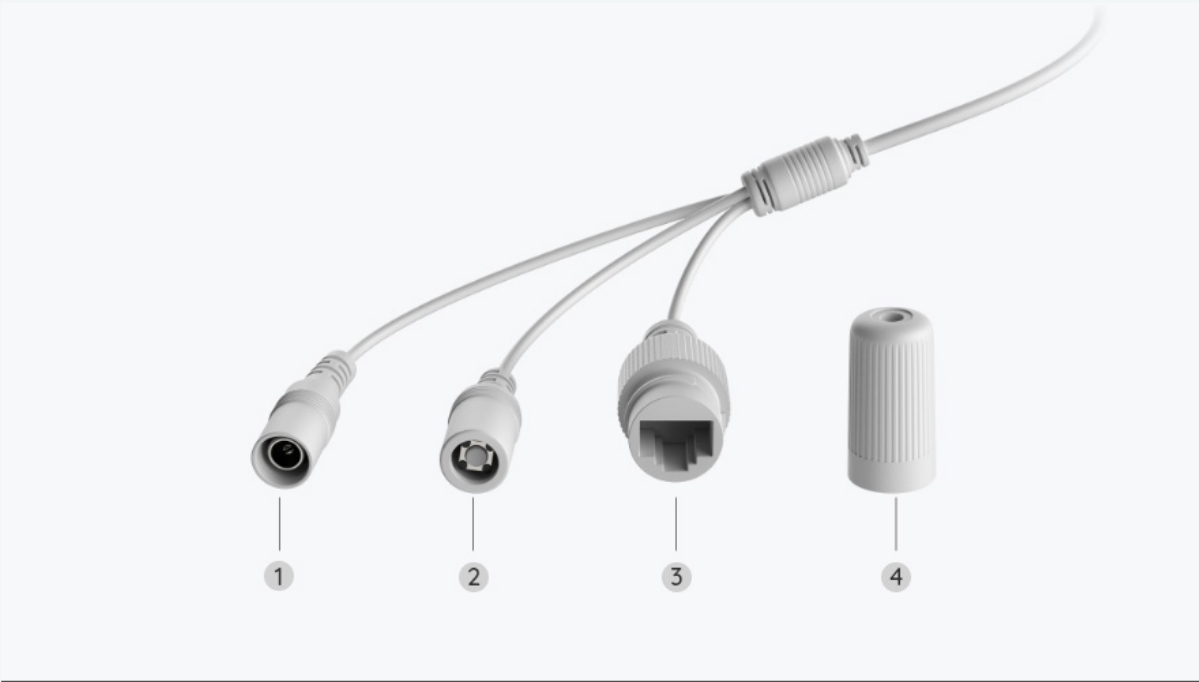

- |                  |                |           |
|------------------|----------------|-----------|
| 1 Power          | 2 Reset Button | 3 Network |
| 4 Waterproof Lid |                |           |

## Best Companion



PoE Injector



microSD Card



Reolink NVR




Ethernet Cable



Waterproof Lid



RLA-POECS1  
(Combiner & Splitter)



Junction Box B10

## Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>



## Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at [reolink.com](https://reolink.com). Keep out of reach of children.

## Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>

NVS16

# 16-Channel PoE NVR for 24/7 Reliable Recording



## 16-Channel

The NVR can connect up to 16 Reolink PoE/WiFi cameras.



## Built-in 4TB HDD

Store videos locally on a pre-installed 4TB HDD (upgradable to 12TB).



## 24/7 Recording

Continuous recordings directly to your hard drive with expandable storage.

## 16MP

### Support up to 16MP

Record up to 16MP ultra-clear videos on every channel.



## All-Around Protection

Stand guard over every inch of your property with up to 16 cameras.



## Centralized Security

Take full control of all cameras with centralized NVR management.



## PoE

The plug-and-play setup saves you time and effort.



## Remote Access

Easily check live feeds from anywhere via the Reolink App/Client.



## Local Access

Access the live feeds offline via a monitor or an HD TV.





## Centralize Your Security

Connect your Reolink cameras to the NVR for centralized management, all-round surveillance, and more. Everything is under your control.



## 24/7 Continuous Recording

Save days of your 24/7 footage securely and locally on a 4TB HDD (upgradable to 12TB). Never worry about data loss.




## Your Personalized Security Solution

The 16-Channel NVR is compatible with all our IP cameras - up to 16MP PoE/WiFi cameras. Have fun customizing your own security system.



## PoE - Easy Setup

Simply connect your cameras to the NVR with a network cable for both data & power transmission. No messy cables, ideal for DIY lovers.

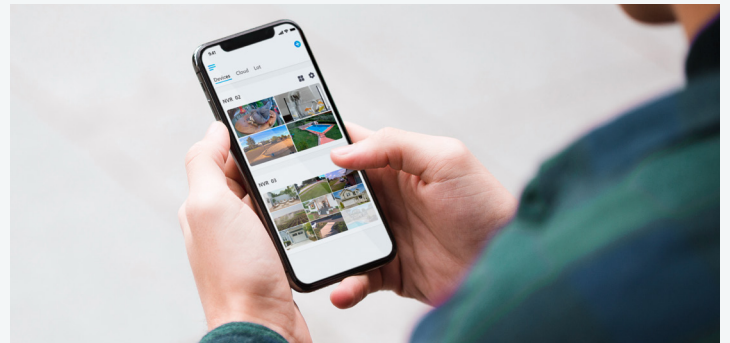


## Local and Remote Access & Control

Access the live streams of all cameras anywhere with the Reolink App/Client, or connect the NVR to a monitor for local monitoring.



## Gallery

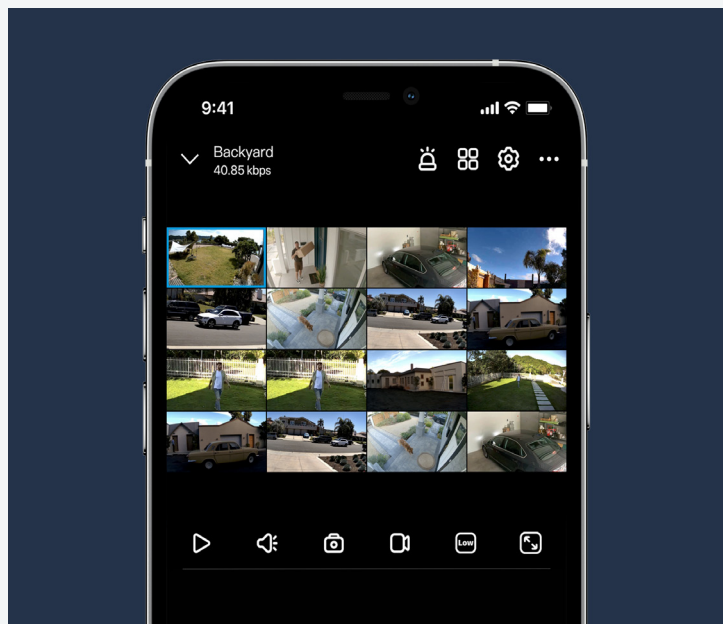

### One App/Client for All Control

Stay connected to your home or business anytime, anywhere.




### Privacy in Your Hands


We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



<b>Model</b>	NVS16	
<b>Hardware</b>	Hardware	4TB HDD: N6MB01
<b>Video/Audio Input</b>	IP Video Input	PoE IP camera x 16
	Audio Input	Cameras with built-in mic
<b>Video/Audio Output</b>	Video Output	VGA, HDMI
	Display Resolution	HDMI: 3840*2160, 1920*1080, 1280*1024, 1280*720, 1024*768
	Audio output	VGA: 1920*1080, 1280*1024, 1280*720, 1024*768
	Audio output	1-channel, RCA
<b>Decoding</b>	Video Format	H.264, H.265
	Live View / Playback Resolution	7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p
	Synchronous Playback	Up to 4 channels
<b>HDD</b>	SATA	2 x SATA interface (1 x 4TB HDD included)
	Capacity	Up to 12TB (max. 6TB capacity for each HDD)
	External HDD	No
<b>External Interface</b>	USB Interface	2 x USB 2.0
	Network Interface	1, RJ-45 10/1000 Mbps self-adaptive Ethernet interface for LAN/WAN 16, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
<b>PoE</b>	Max. Power Per Port	25W
	Supported Standard	IEEE 802.3af/at
<b>Network</b>	Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
	Browsers Supported	Edge, Firefox, Chrome, Safari
	OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
	Max. User Access	20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams))
<b>General</b>	Power Supply	DC 48V~54V
	Power Consumption	<10W (Without HDD&PoE)
	Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
	Dimensions	330 x 45 x 285mm
	Weight	2.4kg
<b>Warranty</b>	Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> .

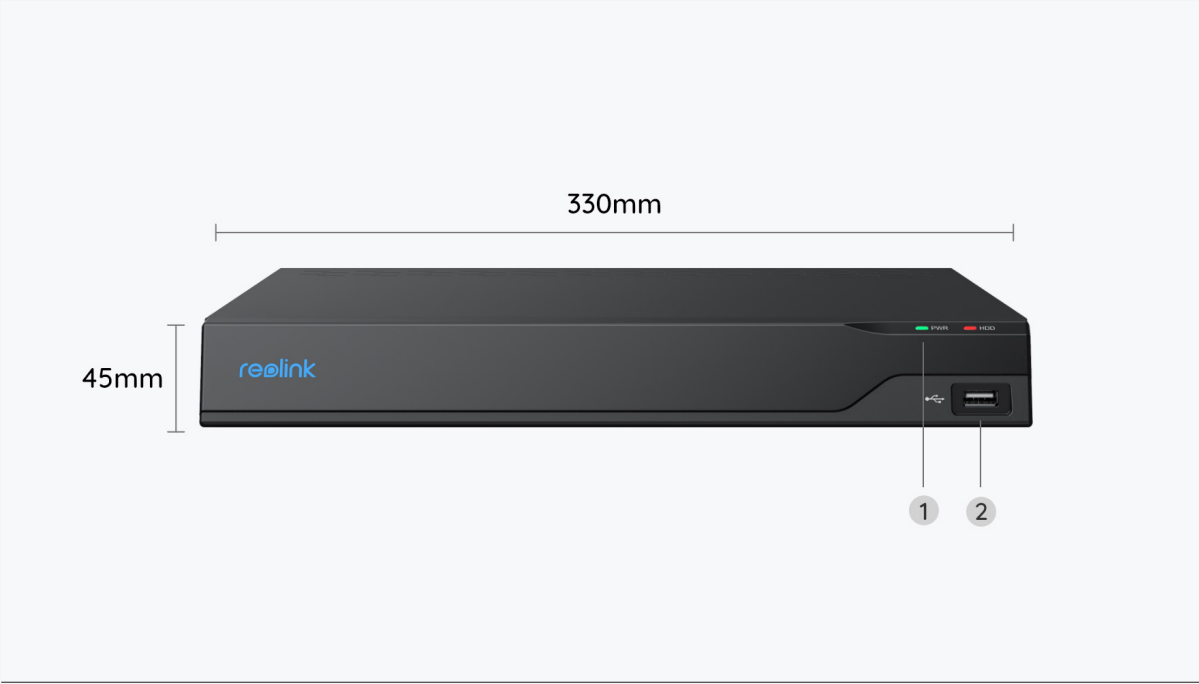

- 1 Power LED/HDD LED
- 2 USB Port

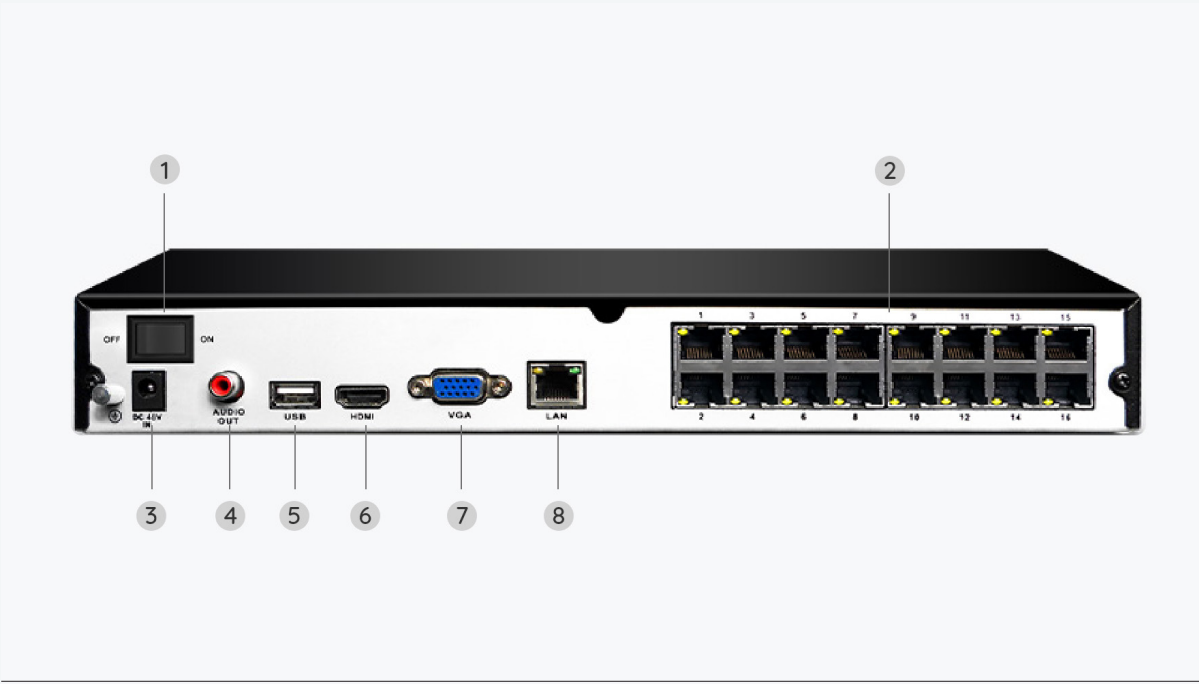

- 1 On/Off Switch
- 2 RJ45
- 3 Power Input
- 4 Audio Out
- 5 USB Port
- 6 HDMI Port
- 7 VGA Port
- 8 Network



## Best Companion



Mouse

## Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>



## Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at [reolink.com](https://reolink.com). Keep out of reach of children.

## Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>