



*All images in this datasheet are for illustrative purposes only.



UHD TV Signage PK340S

LG TV Signage with Essential Function



Superb Picture Quality with Ultra HD Resolution



Improved Design with Slim Depth



High-Performance with webOS25




Embedded Content & Group Management



Versatile Content Management with LG SuperSign CMS

PK340S

| | |
|---------------------------|--|
| Inch | 86" / 75" / 65" / 55" / 50" / 43" |
| Screen Resolution | 3,840 × 2,160 (UHD) |
| Backlight Life | 30,000 Hrs, 16 Hrs / 7 Days |
| Brightness | 86/75/65/55/50": 300 (Typ.) / 260 (Min.) nits 43": 270 (Typ.) / 240 (Min.) nits |
| LG Solution Compatibility | LG Business Cloud, LG ConnectedCare, LG SuperSign CMS, LG SuperSign Control |

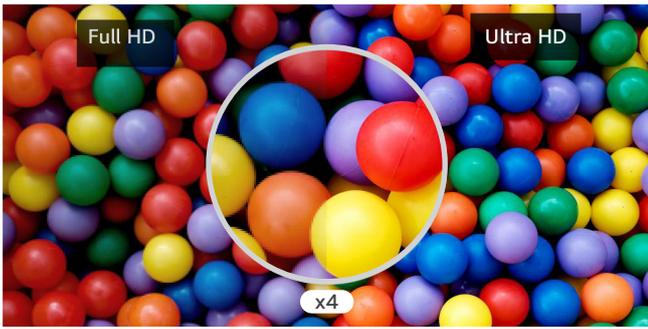

Superb Picture Quality with Ultra HD Resolution

With the resolution that is 4 times higher than FHD, it makes the colors and details of the content more vivid and realistic.



Slim Design

The PK340S stands out with its slim design. Its compact form not only saves space but also allows for easy installation, making it an ideal choice for a variety of settings.



Convenient webOS Platform


LG webOS 25, upgraded in SoC (System on Chip) and web engine, is available on PK340S series for a smooth execution of several tasks. LG webOS smart signage platform enhances user convenience with intuitive GUI (Graphical User Interface).



Versatile Content Management with LG SuperSign CMS

LG SuperSign CMS* is an integrated, intuitive solution for managing creative and well-organized digital signage content. It helps connect customers to a variety of services while improving the overall user experience.

* LG SuperSign CMS is sold separately

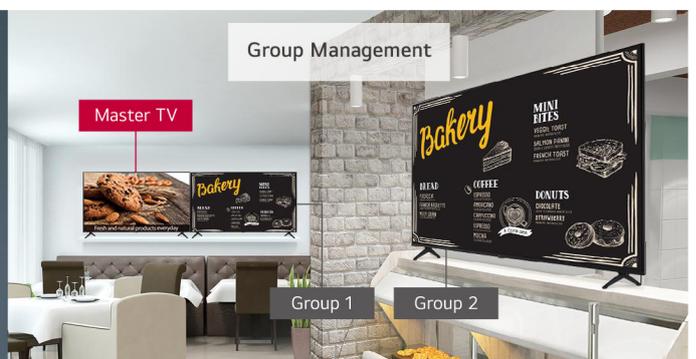

Content and Group Management

The embedded Content and Group Management System lets you easily edit and play content, set playlists, and control signage with a remote control, mouse, or mobile phone—no separate PC or software required. This makes content management straightforward and user-friendly.



Display Power Management Support

Display Power Management (DPM) can be set to 'On' when a TV signal is detected, allowing for more efficient power management.



Real-Time Monitoring with LG ConnectedCare

LG ConnectedCare*, an optional cloud service solution, offers easy and fast maintenance by remotely monitoring the status of displays in client workplaces. It supports fault diagnosis and remote control services, helping to ensure stable operation for clients' businesses.

* The availability of the 'LG ConnectedCare' service differs by region, and it needs to be purchased separately. So please contact the LG sales representative in your region for more details.

CONNECTIVITY

86"

Bottom




Side



75"

Bottom

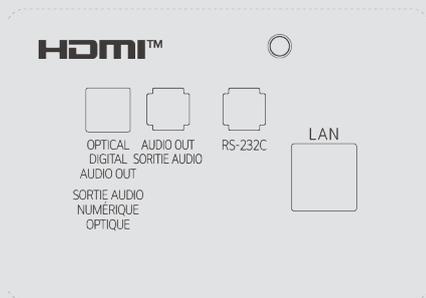

Side



65" / 55" / 50" / 43"

Bottom



Side



SPECIFICATIONS

| | 86PK340S0UA | 75PK340S0UA | 65PK340S0UB | 55PK340S0UB | 50PK340S0UB | 43PK340S0UB | |
|---------------------------------|---|---|--|--|--|--|---|
| Design | Tool Name | BOE UA75 | BOE UA75 | BOE UA73 | BOE UA73 | BOE UA73 | |
| | Stand Type | 2-Pole | 2-Pole | 2-Pole | 2-Pole | 2-Pole | |
| Display | Front Color | Black | Black | Black | Black | Black | |
| | Inch | 86" | 75" | 65" | 55" | 50" | |
| | Resolution | 3840 X 2160 | 3840 X 2160 | 3840 X 2160 | 3840 X 2160 | 3840 X 2160 | |
| | Backlight Unit Type | Direct | Direct | Direct | Direct | Direct | |
| | Brightness (Typ. / Min.) | 300 nits / 260 nits | 300 nits / 260 nits | 300 nits / 260 nits | 300 nits / 260 nits | 300 nits / 260 nits | |
| | Dynamic Contrast Ratio (Dynamic MCL (Hz)) | 1,000,000:1 | 1,000,000:1 | 1,000,000:1 | 1,000,000:1 | 1,000,000:1 | |
| | Static (Panel) Contrast Ratio | 5000:1 | 1200:1 | 1200:1 | 1200:1 | 5000:1 | |
| | Response Time (G to G) | 8 ms | 8 ms | 8 ms | 8 ms | 9.5 ms | |
| | Refresh Rate | 60 Hz | 60 Hz | 60 Hz | 60 Hz | 60 Hz | |
| | Lifetime | Up to 30,000 Hrs | Up to 30,000 Hrs | Up to 30,000 Hrs | Up to 30,000 Hrs | Up to 30,000 Hrs | |
| Video | SoC | K25Lp | K25Lp | K25Lp | K25Lp | K25Lp | |
| | SoC (Marketing Name) | Quad | Quad | Quad | Quad | Quad | |
| | HDR 10 Pro / HDR_HLG | Yes / Yes | Yes / Yes | Yes / Yes | Yes / Yes | Yes / Yes | |
| Audio | Speaker (Sound Output) | 10W + 10W | 10W + 10W | 10W + 10W | 10W + 10W | 10W + 10W | |
| | Speaker System | 2.0 ch | 2.0 ch | 2.0 ch | 2.0 ch | 2.0 ch | |
| | LG Sound Sync | Yes (Optic) | Yes (Optic) | Yes (Optic) | Yes (Optic) | Yes (Optic) | |
| Broadcasting System | Digital (ATSC / Clear QAM), Analog (NTSC), Teletext (Auto Teletext), Global IPTV Support (IP Streaming) | | | | | | |
| Smart Function | webOS25, Smart Home (Launcher Bar), Quick Access, Web Browser, Pre-Loaded App (YouTube Only), SDP Server Compatibility, SW Clock (World Clock / Alarm), Mood Display, HDMI-ARC (ARC, HDMI2) | | | | | | |
| Other Feature | USB Cloning, WOL, SNMP Diagnostics (Self Diagnostics (USB)), SI Compatible Protocol (TV Link Tuner), HTNG-CEC, Simplink (HDMI-CEC (1.4)), IR Out (RS-232C Phone Jack Type), Multi IR Code, Hotel Mode / PDM / Installer Menu, Lock Mode (Limited), Port Block, Welcome Screen (Splash Image), Insert Image, IP Channel Manager, External Speaker Out (Audio Out with 3.5 mm Phone Jack), Moving Picture Playback (SD / HD / Plus HD), Auto Off / Sleep Timer, Energy Saving Mode, Motion Eye Care | | | | | | |
| Vertical Function | Signage (Corporate / Retail) | Vertical Setup, Fail Over, Play Via URL, Crestron Certi. Compatibility, DPM (Digital Power Management), Time Scheduler, NTP Sync Timer, Embedded CM (Contents Manager), Embedded GM (Group Manager) | | | | | |
| | SuperSign SW Compatibility | Control / Control Plus, CMS (Premium), Simple Editor, LG ConnectedCare ¹ | | | | | |
| | Set Side | HDMI In (2 (2.0)), USB (2.0), RF In (Only 75"), RS-232C (Phone Jack, 4 Pin (86/65/55/50/43")), External Speaker Out (3.5 mm Phone Jack (65/55/50/43")) | | | | | |
| | Set Rear / Bottom | RF In (86/65/55/50/43"), Digital Audio Out (Optical), RS-232C (Phone Jack, 4 Pin (Only 75")), External Speaker Out (3.5 mm Phone Jack (86/75")), RJ45 (Usage Purpose (LAN)) | | | | | |
| Mechanical | VESA Compatible | 400 × 400 mm | 300 × 300 mm | 200 × 300 mm | 200 × 300 mm | 200 × 300 mm | |
| | Dimensions with Stand (W x H x D) | 75.6 × 46.5 × 16.3 in. 1,920 × 1,182 × 413 mm | 65.7 × 40.6 × 13.5 in. 1,668 × 1,031 × 344 mm | 56.9 × 35.2 × 12.2 in. 1,446 × 894 × 309 mm | 48.3 × 30.2 × 10.8 in. 1,226 × 766 × 275 mm | 43.7 × 27.6 × 10.8 in. 1,111 × 700 × 275 mm | 37.7 × 23.9 × 9.3 in. 957 × 607 × 237 mm |
| | Dimensions without Stand (W x H x D) | 75.6 × 43.4 × 2.4 in. 1,920 × 1,102 × 59.8 mm | 65.7 × 37.8 × 2.4 in. 1,668 × 960 × 59.8 mm | 56.9 × 32.8 × 2.4 in. 1,446 × 834 × 59.9 mm | 48.3 × 27.9 × 2.4 in. 1,226 × 711 × 59.8 mm | 43.7 × 25.4 × 2.4 in. 1,111 × 645 × 59.8 mm | 37.7 × 22 × 2.3 in. 957 × 559 × 58.3 mm |
| | Shipping Dimensions (W x H x D) | 81.9 × 49.4 × 8.7 in. 2,080 × 1,255 × 220 mm | 73.9 × 45.3 × 6.9 in. 1,875 × 1,150 × 175 mm | 63.9 × 38.4 × 5.6 in. 1,625 × 975 × 141 mm | 54.3 × 32.7 × 4.6 in. 1,380 × 830 × 118 mm | 49.4 × 30.1 × 4.6 in. 1,255 × 765 × 118 mm | 42.1 × 25.6 × 4.4 in. 1,070 × 650 × 113 mm |
| | Weight with Stand | 74.9 lbs. / 34 kg | 52.9 lbs. / 24 kg | 31.7 lbs. / 14.4 kg | 22.9 lbs. / 10.4 kg | 19.2 lbs. / 8.7 kg | 13.7 lbs. / 6.2 kg |
| | Weight without Stand | 73.7 lbs. / 33.4 kg | 51.8 lbs. / 23.5 kg | 31.3 lbs. / 14.2 kg | 22.5 lbs. / 10.2 kg | 18.9 lbs. / 8.6 kg | 13.4 lbs. / 6.1 kg |
| | Shipping Weight | 102.5 lbs. / 46.5 kg | 74.1 lbs. / 33.6 kg | 43.7 lbs. / 19.8 kg | 30.2 lbs. / 13.7 kg | 26.1 lbs. / 11.8 kg | 18.5 lbs. / 8.4 kg |
| | Bezel Width (On) | 12.4/12.4/12.4/19.4 mm | 9.4/9.4/9.4/18 mm | 8.6/8.6/8.6/17.2 mm | 8.2/8.2/8.2/17.5 mm | 7.6/7.6/7.1/16.8mm | 7.8/7.8/7.8/17 mm |
| | Bezel Width (Off) | 10.3/10.3/10.3/2.5 mm | 7.3/ 7.3/7.3/2.5 mm | 7.1/7.1/7.1/2 mm | 6.9/6.9/6.9/1.3 mm | 6.3/6.3/5.8/1.4 mm | 6.7/6.7/6.7/1.8 mm |
| | Power | Power Supply | 100 to 240 Vac, 50/60Hz | 100 to 240 Vac, 50/60Hz | 100 to 240 Vac, 50/60Hz | 100 to 240 Vac, 50/60Hz | 100 to 240 Vac, 50/60Hz |
| Power Consumption (Max. / Typ.) | | 226 W / 195 W | 201 W / 170 W | 157 W / 143 W | 136 W / 113 W | 116 W / 102 W | |
| Standby Power Consumption | | Under 0.5 W | Under 0.5 W | Under 0.5 W | Under 0.5 W | Under 0.5 W | |
| Warranty & Other | Warranty | 3 year limited | 3 year limited | 3 year limited | 3 year limited | 3 year limited | |
| | Safety | UL | UL | UL | UL | UL | |
| | EMC | FCC Class B | FCC Class B | FCC Class B | FCC Class B | FCC Class B | |
| | Others | ISTA6 | ISTA6 | ISTA6 | ISTA6 | ISTA6 | |
| | Accessories | Remote Type (L-Con, AKB75095376), Power Cable (86/75": 2 m, 65/55/50/43": 1.5 m), RS-232C to Phone Jack Cable | | | | | |

1) The availability can differ by region.