

EN

With your inspiring rating, COSTWAY will be more consistent to offer you EASY SHOPPING EXPERIENCE, GOOD PRODUCTS and EFFICIENT SERVICE!

DE

Mit Ihrer inspirierenden Bewertung wird COSTWAY konsistenter sein, um Ihnen EIN SCHÖNES EINKAUFSERLEBNIS, GUTE PRODUKTE und EFFIZIENTEN SERVICE zu bieten!

FR

Avec votre évaluation inspirante, COSTWAY continuera à fournir une EXPÉRIENCE D'ACHAT PRATIQUE, des PRODUITS DE QUALITÉ et un SERVICE EFFICACE !

ES

Con su calificación inspiradora, COSTWAY será más consistente para ofrecerle EXPERIENCIA DE COMPRA FÁCIL, BUENOS PRODUCTOS y SERVICIO EFICIENTE.


IT

Con la tua valutazione incoraggiante, COSTWAY sarà più coerente per offrirti ESPERIENZA DI ACQUISTO FACILE, BUONI PRODOTTI e SERVIZIO EFFICIENTE!

PL

Dzięki twojej opinii COSTWAY będzie mógł oferować jeszcze WYGODNIEJSZE ZAKUPY, LEPSZE PRODUKTY i SPRAWNIEJSZĄ OBSŁUGĘ KLIENTA.

US office: Fontana **UK** office: Ipswich **AU** office: Truganina
DE office: Hamburg **FR** office: Saint Vigor d'Ymonville **PL** office: Gdańsk

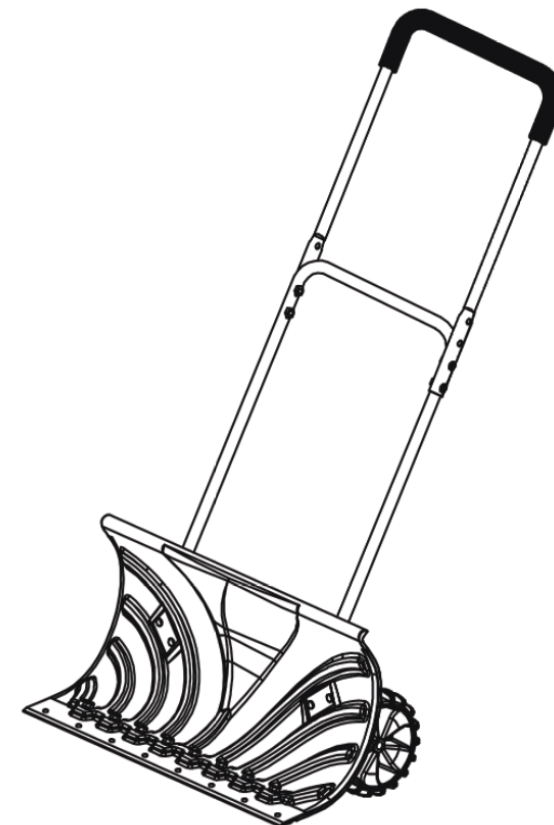

USER'S MANUAL

Schneeschaufel OP70068

THIS INSTRUCTION BOOKLET CONTAINS **IMPORTANT** SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.



Pusher Head
A x1



Stabilizing Bar
B x1



Handle with Grip
C x1



Wheel
D x2



Wheel Bracket
E x2



1/4"x 4/5" Square
Neck Screw
F x4



Plate
G x2



Bolt 1/4"x3/8"
H x2



Flange Nut 1/4"
I x6



Bolt 3/8" x 1-1/10"
J x2



Flat Washer 3/8"
K x4



Lock Washer
L x2



Nut 3/8"
M x2




Screw 1/4"x 1-1/8"
N x4



Nut 1/4"
O x4

1 Snow Pusher Head Assembling


Secure the snow pusher head (A) onto the wheel bracket (E). Insert 4pcs square neck screw (F) from the front of the pusher head (A) into the left and right wheel bracket (E), fasten them by the flange nut (I) with wrench. Please refer to picture below.

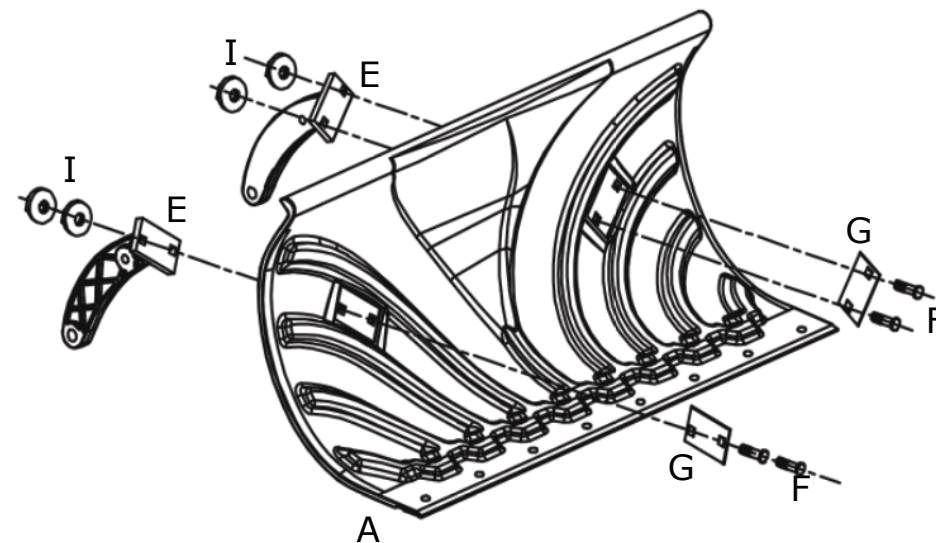

2 Wheels Assembling

Secure the left and right wheel (D) onto the wheel bracket (E) by bolt (J) + flat washer (K) + lock washer (L) + nut (M). Please refer to picture below.

Note: please apply the flat washer (K) / lock washer (L) in sequence as shown in the picture to help the wheel turns freely.

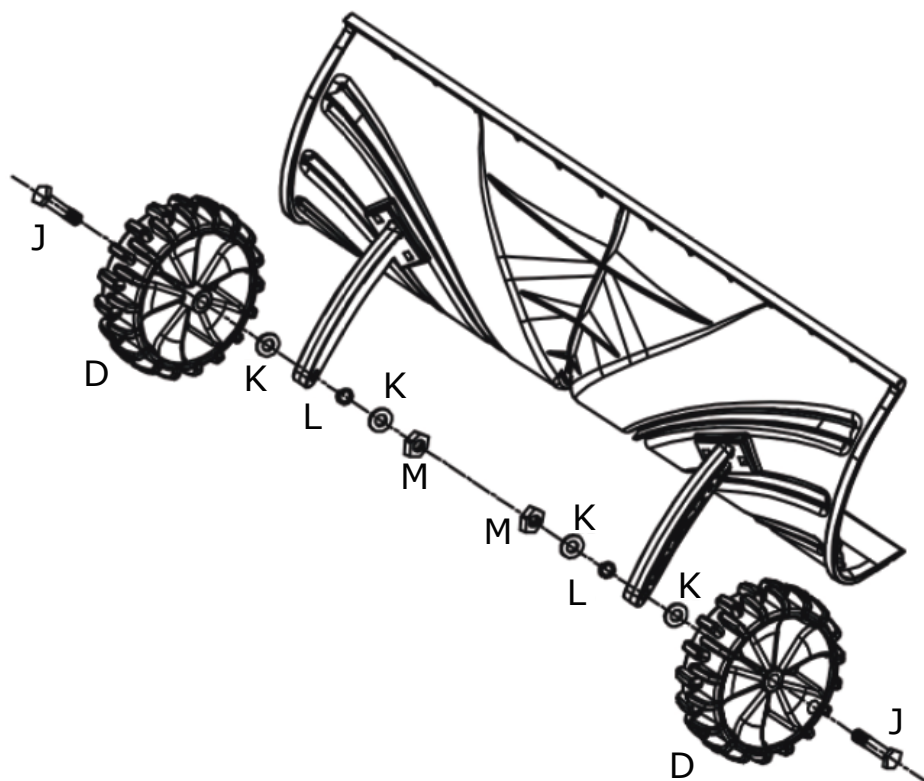

3 Handle Assembling

Assemble the stabilizing bar (B) onto the wheel bracket (E) by bolt (H) and flange nut (I), then assemble the handle with grip (C) onto the stabilizing bar (B) by screw (N) and nut (O). Please refer to picture below.

Note: Please use a hammer for the assembly of bolt (H) and flange nut (I).

