

# 替换滤芯说明书

## Waterdrop

### Replacement Filter Installation Manual

Model: WD-K19RF


#### Replacement for the following water filtration system:

Waterdrop Countertop Reverse Osmosis Water Dispenser:  
WD-K19-S, WD-K19-H-US, WD-K19-H-DE, WD-K19-H-UK

**Filter life: Up to 12 months.** (which may vary according to local water quality)


**△ Note:** Do not use it with water that is microbiologically unsafe or of unknown water quality without adequate disinfection.

#### Filter Replacement Guide




##### Step 1:

Turn counterclockwise to remove the old filter.




##### Step 2:

Install the new filter and rotate it clockwise and downwards to the lock.




##### Step 3:

Hold the "Filter" key for 5 seconds for filter reset.



##### Step 4:

• Automatic flushing for 5 mins.  
• If the screen displays "L1", change water in the tank.

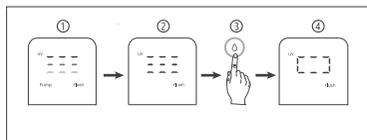

##### Step 5:

• ①-② Filtering water for 2-3 mins.  
• ②-③ Place a 1.5L/51 OZ container, and press the "Filter" key to dispense water.  
• ③-④ Circular flushing for 3L/102OZ.  
• If the screen displays "L1", change water in the tank.

#### △ Note:

1. After first 12L/408 OZ of water is taken, you will get the best taste.
2. It is not recommended to drink water obtained when the "Flush" light blinks.
3. Any time the screen displays "L1", pour out all remaining water and refill it with water.

#### Storage and maintenance:

- Replace the filter regularly according to the light of the filter life indicator.
- Do not store the filter for a long time, and place it in a dry, cool place when not in use.
- The water source needs to meet the requirements of municipal tap water.

#### Frequently asked questions:

**Q:** After filter replacement and flushing, the dispenser displays L1 to prompt a water change. Can I continue to use it without changing the water?

**A:** After the MRO filter is replaced, the dispenser will be automatically flushed for 5 minutes. The concentrated water produced by flushing will return to the feed water tank, leading to increase of impurities in feed water. To protect the filter life and keep the freshness of the drinking water, it is recommended to use it after changing the water in the feed water tank.

**Q:** Why does the filtered water taste bad?

**A:** The first 3L/102 OZ of water cannot be drunk! After that, it is recommended to flush the whole filtration dispenser (from water tank to water dispensing) for another 12L/408 OZ of water, and you will get the best taste!

If the dispenser has not been used for a while, follow the emptying mode prompt to flush.

If the filter is not replaced in time, please replace the filter immediately.

**Q:** Why is the filter life indicator still red after the filter is replaced?

**A:** You have forgotten or failed to reset the "Filter" key. Please reset it again: Hold the "Filter" key for 5 seconds for filter reset.

#### △ Warning:

To reduce the risk of property damage due to water leakage, this filter MUST be installed in accordance with the manufacturer's specifications and instructions. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product.

#### Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)

E-mail: service@waterdropfilter.com



Made in China V002

Qingdao Ecopure Filter Co., Ltd.

140mm

105mm



青岛伊可普电器有限公司包材设计图纸

#### 印刷品技术要求 IMPORTANT PRINTING CAUTION

1. 印刷要求 □覆光膜 □覆亚膜 □UV油 □吸型油 □过油 □丝印
2. 材质要求 105g铜版纸
3. 颜色要求 成品尺寸105\*140, 正反面单黑印刷