


## Diagram



For product installation videos and more, visit:

[weboost.com/install](http://weboost.com/install)

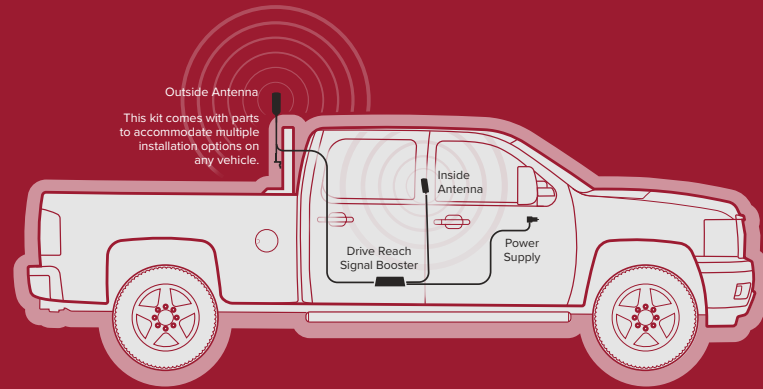

[weboost.com](http://weboost.com)

## Register your Signal Booster now!

Complete the two easy steps to register your booster and receive premium customer service, special offers and more!

**Step 1:** Take a photo of your Photoregister Code including the points (●).



**Step 2:** Send it in.



**Smartphone U.S. only**  
Text photo to 71403

**OR**



**Email U.S./CAN**  
[weboost@photoregister.com](mailto:weboost@photoregister.com)

**OR**



**Online**  
[register.weboost.com](http://register.weboost.com)


**Need help?** Visit [photoregister.com/help](http://photoregister.com/help) or text HELP to 71403.

GDE000284\_Rev01\_09.22.20

## Installation Overview




**Drive Reach OTR**  
Cell Signal Booster




## STEP 1: Select Mounting Location & Assemble the Outside Antenna


Once you have determined the best location for the **Outside Antenna**, insert cable through **mast(s)** then through **Side Exit Adapter**. Screw together as shown.

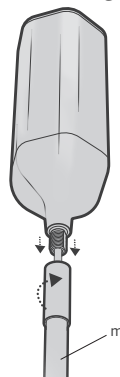

Drive OTR  
Outside Antenna




Different Assembly Options

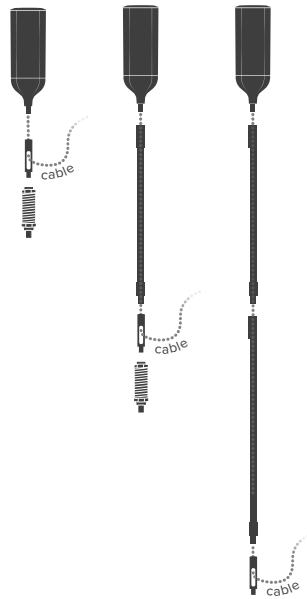



## STEP 2: Mounting the Outside Antenna

If the vehicle does not have built-in mounting points, a **Three-way Mount** is included that will work on vehicles with mirror rails. **For more info on using Spring, see Installation Guide.**




## STEP 3: Mounting the Inside Antenna

Identify a place to mount the **In-Vehicle Antenna**, either on the side of the seat or on the dash and mount. The location should be at least 18 inches but no more than 36 inches from where the cellular device will be used.




## STEP 4: Booster Location & Connect Cables

Find a location to place the **Drive Reach Booster** and secure it with provided bracket. **Connect cable from Outside Antenna** to labeled booster port and **connect cable from Inside Antenna** to labeled booster port.



## STEP 5: Connect Power Supply To Booster

**Connect the power supply cord** to the end of the booster, labeled “**==**”, and plug the power adapter into vehicles 12V DC power supply. Enjoy your boosted signal!



**Refer to Installation Guide for Detailed Instructions.**