

# Installation Instructions

1. Read all instructions before installing product.
2. Open the package and check if the product is in good condition; tools required for installation do not come with product, please prepare by yourself.
3. The installation attentions are written in this manual, please keep it properly.
4. The dimensional drawing only for reference purpose, so please see the real product.


## Recommended Tools:



Teflon Tape




Allen Key




Phillips  
Flathead Screwdriver

## Faucet Dimension:

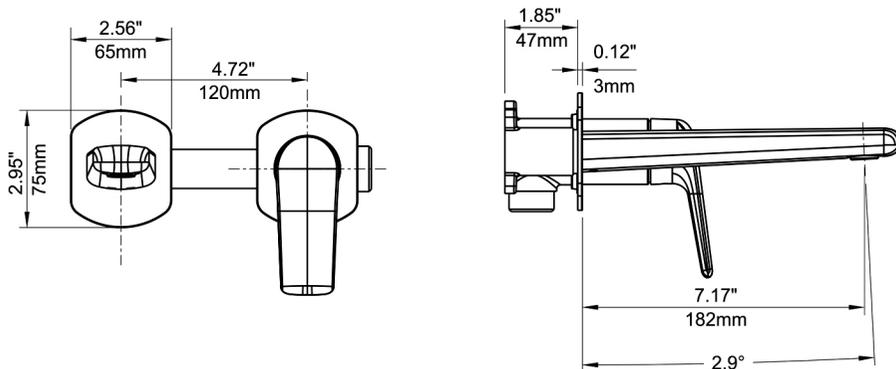


- 1) Mark position of the screw hole on the wall, drill hole and install the main valve body

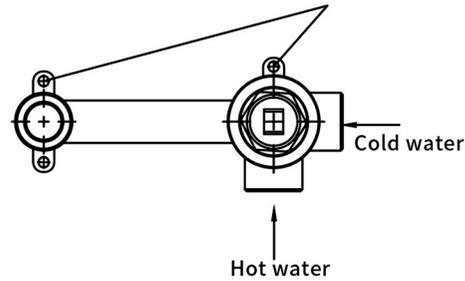


In order to well protect main valve body, please do not take off the plastic cover .

inner wall surface is flat with this surface of main valve body

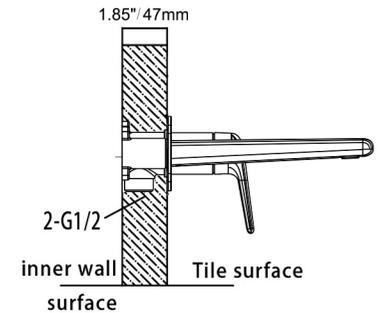

- 2) After well install the main valve body, please install the faucet as the following drawing:

1. Remove the plug and protective cover.
2. Pass two screws through the panel and the water outlet, tighten them with a Phillips screwdriver, and then tighten the part under the water outlet with an Allen key.
3. Screw the water outlet tightly onto the valve body joint.
4. Install the panel on the valve core, cover the handle, and tighten the bottom screw with an Allen key.

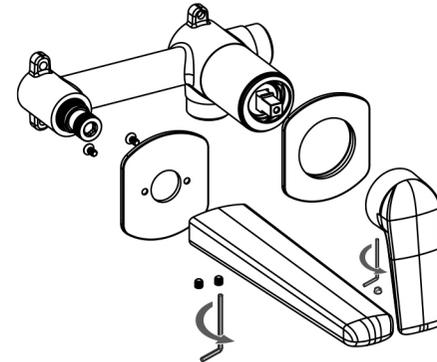

## Warning:

1. Before installation, flush the water supply pipes thoroughly to remove the debris.
2. Install faucet water inlet correctly (left-hot water, right-cold water)
3. Made sure the maximum temperature of hot water less than 80°C