

## Installation instructions

### Undersink water filter

#### A replacement for the following water filters:

Aqua Pure® filters

AP431, AP430, AP430SS, SF18-S Scale Inhibition System

Filter life: 6 months

#### Installation instructions

Always have spare cartridges on hand.

1. Shut off inlet (Stop and Waste) and outlet (Compression Gate) valves.
2. Open drain on inlet valve to relieve pressure.
3. Unscrew the cartridge to the left as shown in the illustration (Figure 1).
4. Install the new cartridge, moderately hand tight. Never use tools to tighten a cartridge.
5. Turn on inlet valve and bleed air through gate valve drain until water appears. Then close drain, and open outlet valve.

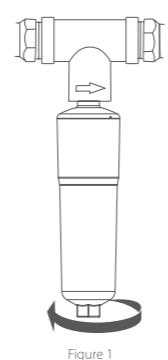


Figure 1

#### Caution:

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

#### Operating specifications:

Minimum operating temperature .....	4.4°C/40°F
Maximum operating temperature .....	38°C/100°F
Min. working pressure .....	207 kPa/30 psi
Max. working pressure .....	862 kPa/125 psi
Flow rate .....	37.9 lpm/10 gpm

#### Storage and maintenance:

- Replace your filter every 6 months to achieve optimal performance and prevent bacteria and fungus growth in your filter and supply lines.
- Keep your unused filters in a cool, dark, and dry place until you need them.

8065A

140mm



图像颜色请依据数码稿印刷  
请不要擅自变更来稿件，如须修改，请联系伊可普做有关决定

#### 印刷品技术要求 IMPORTANT PRINTING CAUTION

1. 印刷要求  覆光膜  覆亚膜  UV油  吸塑油  过油  丝印
2. 材质要求 80g双胶纸, 双面印刷
3. 颜色要求 单黑印刷
4. 版面要求 印刷品文字线条印迹清晰、无重影; 印刷品套印准确无偏色、溢墨、指痕等; 印刷品上光层均匀、光亮、牢固无粘连; 覆膜表面平整、无褶皱、光泽度好; 纸张材质正确, 切边整齐、压线深浅适中、洁净、无斑点和条痕。

#### 版式设计要求:

1. 字体: 标题为 Myriad Pro SemiBold, 内容为 Myriad Pro light;
2. 上下页边距为 9mm, 左右边距为 8mm;
3. 标注说明书长宽尺寸, 单位 mm.

#### Frequently asked questions:

Q: Why is it difficult to twist the new filter into the filter housing?

A: Pressure inside may cause the expansion of connector, increasing the installation difficulty. Therefore, it is recommended you push the new filter in with a little bit of force, but not too hard. Then turn it clockwise.

Q: Must the filter be changed every 6 months?

A: Yes. You must replace the filter every 6 months or sooner if water flow is reduced or if there is heavy sediment/rust sediment. Filters left in longer will fatigue, degrading the filter performance.

Q: Do I need to flush the filter before using?

A: Yes. It is highly recommended you flush the filter before using. Water filters are made from advanced coconut carbon block, so there are some carbon fines in the filter. You need to flush firstly to remove those carbon fines to get clean water.

#### ⚠ Warning:

To reduce the risk of property damage due to water leakage, the filter MUST be installed in accordance with the manufacturer's specifications and instructions. This filter unit must be replaced every 6 months. Failure to follow instructions and operating specifications will void your warranty. What's more, manufacturer assumes no responsibility or liability for damage arising out of misuse of the product.

Aqua Pure® is a registered trademark of 3M Company.

Aqua Pure® is used for reference purposes only.

\*The service life mentioned above is subject to chlorine reduction.  
Actual result varies according to the local water quality.

210mm

#### Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)

E-mail: service@water-filter.com



Made in China V040  
Qingdao Ecopure Filter Co., Ltd.

伊可普

青岛伊可普电器有限公司包材设计图纸

品牌 BRAND NAME		工厂型号 ITEM NO.	EWF-8065
物料编码 INNER CODE.	03070008065A	版本号 VERSION.	V040
包材文件名称 FILE NAME.	03070008065A EWF-8065A-说明书-V040		
规格 MEASURE.	210*140mm	页数 PAGE.	2P
设计负责人 DWG.BY	张鑫龙	审核日期 VERIFY DATE.	
变更日期 REVISIONS.	2021.11.19		
变更描述 DESCRIPTION.	1.增加客服24H7D365信息		