



**Please give us a chance to make it right and do better !**

Contact our friendly customer service department for help first.

Replacements for missing or damaged parts will be shipped ASAP !

**US** office: Fontana    **UK** office: Ipswich    **AU** office: Truganina

**DE** office: Hamburg    **FR** office: Saint Vigor d'Ymonville    **PL** office: Gdańsk




# Contact Us!

**Do NOT return this item.**

Contact our friendly customer service department for help first.



US:cs.us@costway.com  
UK:cs.uk@costway.com  
AU:cs.au@costway.com

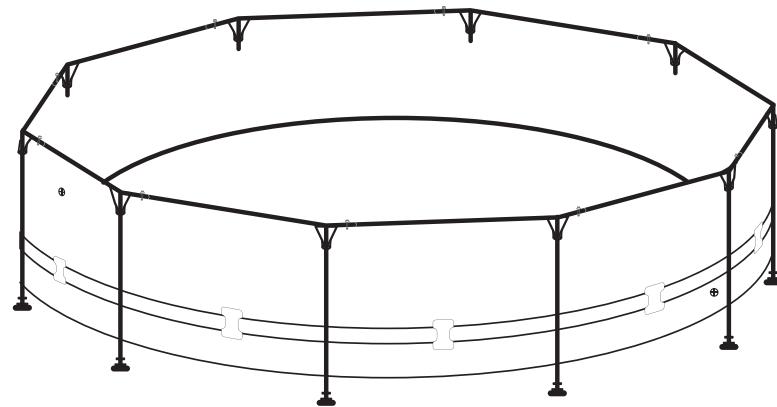

## USER'S MANUAL

### Above Ground Swimming Pool NP10424


## PARTS REFERENCE




## Before You Start

- ⚠ Please read all instructions carefully.
- ⚠ Retain instructions for future reference.
- ⚠ Separate and count all parts and hardware.
- ⚠ Read through each step carefully and follow the proper order.
- ⚠ We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
- ⚠ Always place the product on a flat, steady and stable surface.
- ⚠ Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.

**FOR ABOVE GROUND SWIMMING POOL**  
SIZE: 142\* 30 INCH

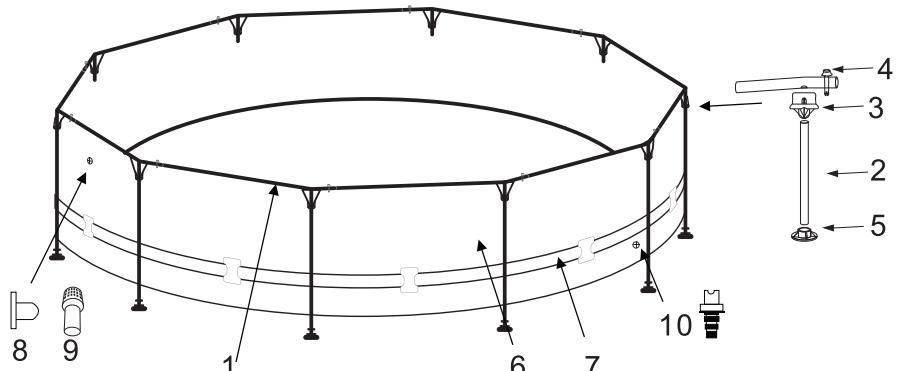

**NOTE:** Drawings for illustration purpose only. Actual product may vary.  
Not to scale.

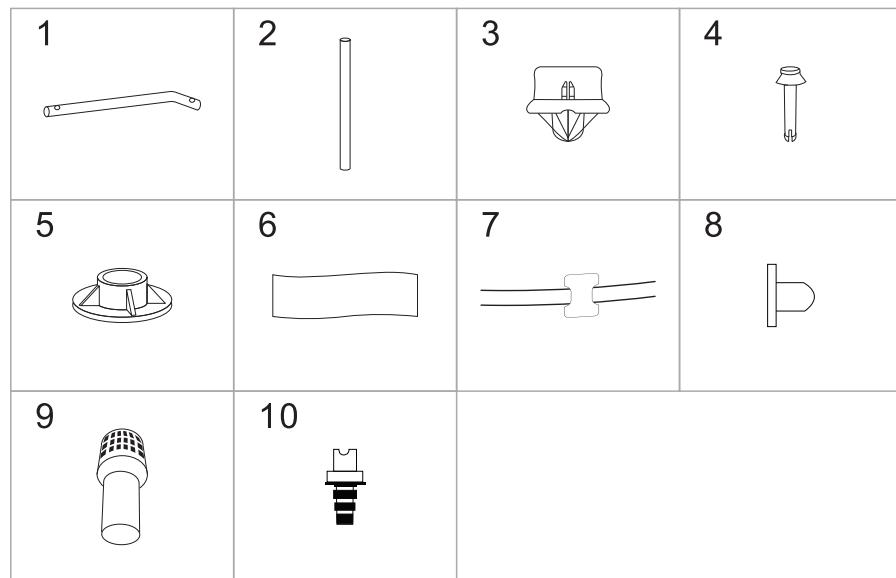

REF. NO	DESCRIPTION	SIZE: 142* 30 INCH
1	J-SHAPED HORIZONTAL BEAM	10
2	VERTICAL LEG	10
3	END CAP	10
4	PIN	10
5	LEG CAP	10
6	POOL LINER(DRAIN VALVE CAP INCLUDED)	1
7	BELT	1
8	STRAINER HOLE PLUG	3
9	FILTER MASK	3
10	DRAIN CONNECTOR	1

## POOL SETUP

Before assembling your product, please take a few minutes to check the contents and become familiar with all the parts.

**⚠ WARNING** · DO NOT overfill the pool or allow people to lay over or sit on pool wall - DOING so CAN CAUSE PERMANENT INJURY! DRAIN pool to the proper level after a heavy rain.

**TIP:** It will be much easier to install your pool if you unfold it and let it lay in direct sunlight for about 2 hours prior to installation. This will help to ensure a wrinkle-free fit because the pool material will be more pliable allowing it to form into shape during installation.

**WARNING** -VERY IMPORTANT! SITE MUST BE LEVEL, STABLE, COMPACTED SOIL.


- The pool must be assembled on a smooth and level site of firm soil that is free of stones, gravel, sticks, blacktop, or other oil base compounds.
- Before setting up your pool, it is recommended that you clear the area of hard grasses. Certain types of vigorous grasses such as St. Augustine and Bermuda can grow through the liner. A ground cloth or tarp may be helpful in preventing this from occurring.
- Do not install pool on a wooden deck or any type of wooden surface. You cannot use sand and/or uncompacted soil to provide a level surface for this pool; it will only wash out.
- FAILURE TO FOLLOW ALL OF THESE INSTRUCTIONS WILL CAUSE POOL TO COLLAPSE!

### SETUP INSTRUCTIONS


1. Locate a level and flat area to set up the pool. Make sure the ground is free from stones, branches, or other sharp objects as they may puncture the pool.
2. Take out the ground cloth and spread it over the cleared area, then take out the pool liner and spread it over the ground cloth, inspect the seams.
3. It is recommended to assemble the pool after the pool liner is heated by the sun.

**IMPORTANT:** Always set up the pool unit with at least 2 persons. Do not drag the liner across the ground as this can cause liner damage and pool leakage.

4. Insert the Vertical Legs into the Leg Caps, then insert the end cap into the head of the vertical leg.




5. Lay all parts on the ground as shown below. Check the parts listing and be sure all the pieces to be assembled are accounted for (see picture).

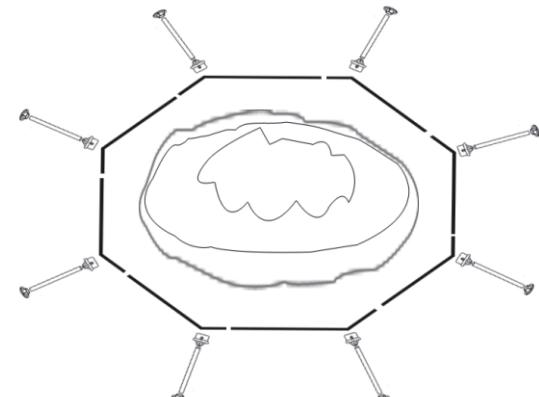


6. Carefully slide the J-shaped Horizontal Beams into the sleeves of the pool.

Connect the j-shaped horizontal beams, rotate the J-shaped horizontal beams so that the holes are aligned, and insert the plastic pins.

**Note:** Insert the plastic pins only after all J-shaped horizontal beams have been connected.

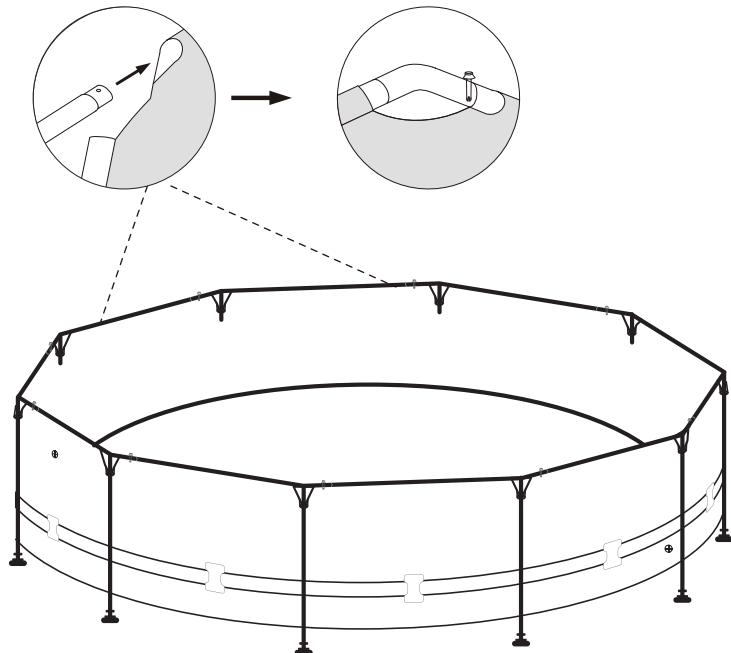

8. Insert the J-shaped vertical legs with end caps into the holes at the bend of the J-shaped horizontal beams.

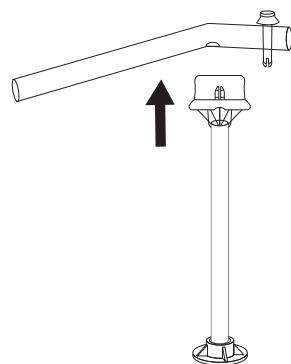

9. Before filling the pool with water, ensure that the drain plug inside the pool is closed and that the drain cap on the outside is screwed on tightly. Fill the pool with no more than 1 inch (2.5 cm) of water. Check to see whether the water is level.

**IMPORTANT:** If the water in the pool flows to one side, the pool is not completely level.

Setting up the pool on unleveled ground will cause the pool to tilt resulting in the sidewall material to bulge and a potential collapse of the pool. If the pool is not completely level, you must drain the pool, level the area and re-fill the pool, following the above directions.

10. Fill the pool with water up to just below the sleeve line.

## IMPORTANT

Before allowing anyone to use the pool, hold a family meeting. Establish a set of rules that include, at a minimum, the important safety rules and general aquatic safety information in this manual. Review these rules on a regular basis and with all users of the pool, including guests.