




SPECIFICATIONS

Model Name	PRO B650-A WIFI
CPU Support	Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
CPU Socket	Socket AM5
Chipset	AMD B650 Chipset
Expansion Slots	2x PCIe 4.0 x16 slots 1x PCIe 3.0 x1 slot
Display Interface	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 – Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR5-7600+MHz (OC)
Storage	3x M.2 Gen4 x4 64Gbps slots, 6x SATA 6Gbps ports
USB ports	1x USB 20Gbps (1 Type-C), 4x USB 10Gbps (3 Type-A + 1 Type-C), 6x USB 5Gbps (6 Type-A), 6x USB 2.0
LAN	Realtek® 8125BG 2.5G LAN
Wireless / Bluetooth	AMD® Wi-Fi 6E, Bluetooth 5.3
Audio	8-Channel (7.1) HD Audio with Audio Boost

FEATURES

- Latest DDR5 Memory**
 A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.
- Lightning Gen4 Solution**
 The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.
- Wi-Fi 6E**
 The latest wireless solution supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.
- Extended Heatsink Design**
 MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.
- M.2 Shield FROZR**
 Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.
- Lightning USB 20G**
 Built-in USB 3.2 Gen 2x2 port, offers 20Gbps transmission speed, 4X faster than USB 3.2 Gen 1.
- 2.5G Network Solution**
 Featuring premium 2.5G LAN to deliver better network experience.
- Memory Boost**
 Advanced technology to deliver pure data signals for the best performance, stability and compatibility.
- Core Boost**
 With premium layout and fully digital power design to support more cores and provide better performance.
- EZ Debug LED**
 Easiest way to troubleshoot.

CONNECTIONS

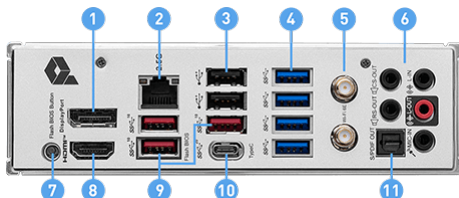

- DisplayPort
- 2.5G LAN
- USB 2.0
- USB 5Gbps (Type-A)
- Wi-Fi / Bluetooth
- Audio connectors
- Flash BIOS Button
- HDMI™
- USB 10Gbps (Type-A)
- USB 20Gbps (Type-C)
- S/PDIF OUT