

BI-30UG/S



## FEATURES

Monitor and control remotely with Wi-Fi connectivity

Preserves refrigerated foods with cool, moist air and frozen foods with frigid, dry air

Fight spoilage and odors with a NASA-inspired air purification system

Locks in cold air to ensure freshness with magnetic door seals

Keeps produce fresher with high-humidity, sealed crisper and deli drawers

Controls temperature within one degree of setpoint

Filters water and ice, removing contaminants, chlorine taste, and odor

Yields ice automatically and "max ice" for additional production

Display food via a single, triple-pane and UV-resistant glass door

Ensures excellent visibility with bright lights

Refer to freshness cards for tips on food preservation, use, and care

## ACCESSORIES

90° Door Stop

Air Purification Cartridge

Dual Installation Kit

Egg Container

Stainless Steel Kickplate

Stainless Steel Pro Louvered Grille - 83"

Stainless Steel Pro Louvered Grille - 88"

Stainless Steel Side Panel

Water Filter

Water Filter By-Pass Plug

White Side Panel

Dual Installation Kit with Dual Wide Grille

Accessories are available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## HANDLE OPTIONS

PRO



TUBULAR



## PRODUCT DETAILS

### REFRIGERATOR

- 4 glass refrigerator shelves (3 adjustable; 1 stationary)
- 1 high-humidity crisper drawer with adjustable dividers
- 1 deli drawer with adjustable dividers
- 1 adjustable dairy compartment
- LED refrigerator and freezer lights

### FREEZER



- 1 full-extension roll-out freezer drawer
- Automatic ice maker with removable ice container

## PRODUCT SPECIFICATIONS

|                       |                                                       |
|-----------------------|-------------------------------------------------------|
| Model                 | BI-30UG/S                                             |
| Dimensions            | 30"W x 84"H x 24"D                                    |
| Door Clearance        | 31 1/4"                                               |
| Drawer Clearance      | 23 5/8"                                               |
| Weight                | 476 lbs                                               |
| Refrigerator Capacity | 13.1 cu. ft.                                          |
| Freezer Capacity      | 4.2 cu. ft.                                           |
| Electrical Supply     | 115 VAC, 60 Hz                                        |
| Electrical Service    | 15 amp dedicated circuit                              |
| Plumbing Supply       | 1/4" OD copper, braided stainless steel or PEX tubing |
| Plumbing Pressure     | 35–120 psi                                            |
| Receptacle            | 3-prong grounding-type                                |

## ELECTRICAL

## PLUMBING




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

## DIMENSIONS

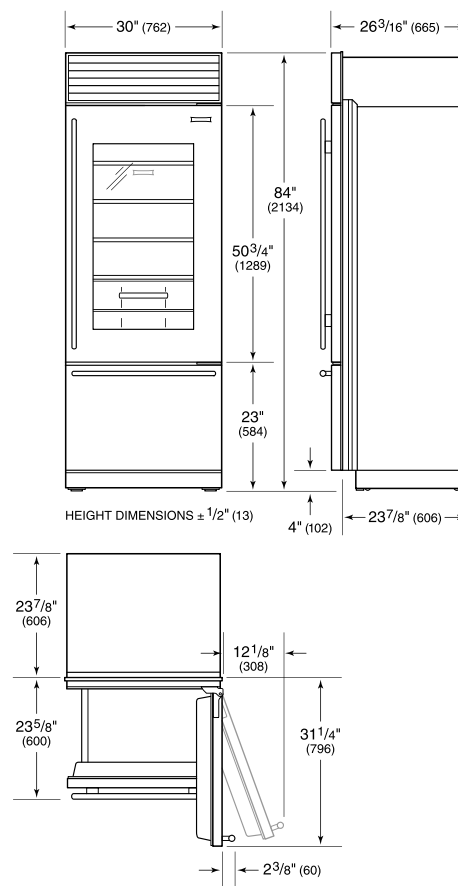

## STANDARD INSTALLATION

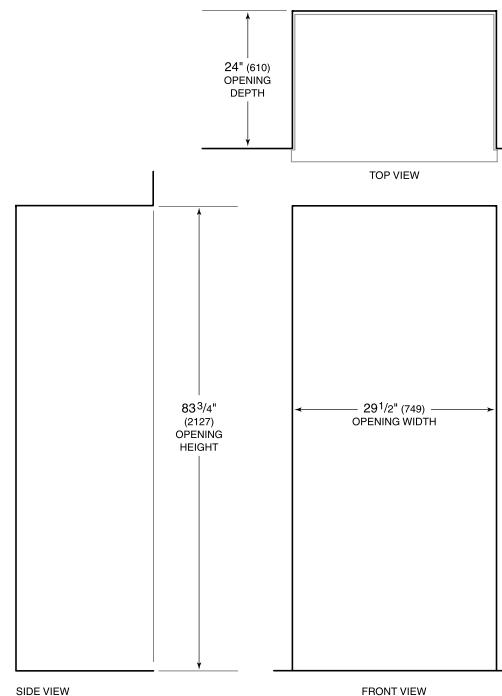

SIDE VIEW

FRONT VIEW

**NOTE:** Shaded line represents profile of unit.