

KIN36XT

36 INSERT HOOD, 2 MOTORS 1200 CFM



Complete liner solution with dual variable-speed blowers, pro filtration and bright worktop lighting

Dishwasher-safe restaurant style pro baffle filters

1200 CFM dual blower with 3 speed settings and booster

Energy-saving LED lights

Electronic push buttons controls

ADA compliant Remote Control

Can be installed in recirculation mode with optional charcoal filter accessories

Designed and manufactured in Italy

2 years parts & labor warranty

PRODUCT FEATURES

Size	36"
Hood type	Built-In
Hood finish	Stainless steel
Motor	2
Speed	3 + Booster
Hood control	Electronic with buttons
Remote control	Included
Lights	2 LED
Filters type	Baffle stainless steel
Extraction power	1200 CFM
Sound Level (min)	2.48 Sones
Recirculation	Yes
Duct cover	Not applicable
Duct size	10" diameter

TECHNICAL SPECIFICATIONS

Electrical supply	110 V 60 HZ - 791 W 6.6 Amp
Power connection	NEMA 5-15P with 59" power cord
Certification	ADA Compliant, CEC, UL
Packaging dimensions and weight	W 39 3/16 " H 15 3/4" D 24 3/16" 37.47 lbs

OPTIONAL ACCESSORIES


901531	Charcoal filters
901532	Durable charcoal filters

KIN36XT

36 INSERT HOOD, 2 MOTORS 1200 CFM




DIMENSIONS

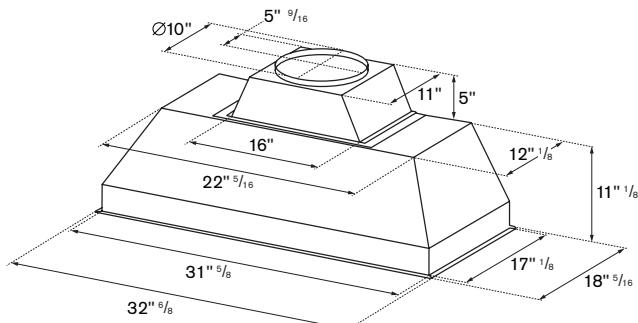


HOOD CLEARANCE

Recommended height above cooking surface
Min 24" for induction/electric worktop
Min 30" for gas worktop

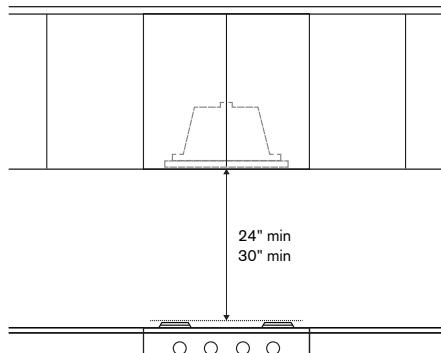

CABINET CUT-OUT

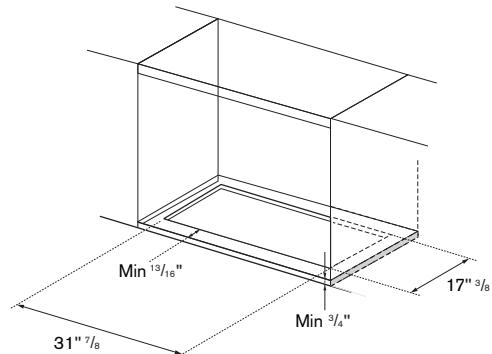

ELECTRICAL CONNECTION

The Power Supply Cord and plug must be connected to a separate 120 Volt AC 60 Hz, 15 Amp or more branch circuit, single grounded receptacle. The cord has a 3-pronged plug and must be installed into an outlet that is properly grounded. The electrical receptacle must be within the minimum cord length of 59".

