


## QUICK SETUP GUIDE

# USB to HDMI Multi-Monitor Adapter

NS-PU32H4A / NS-PU32H4A-C

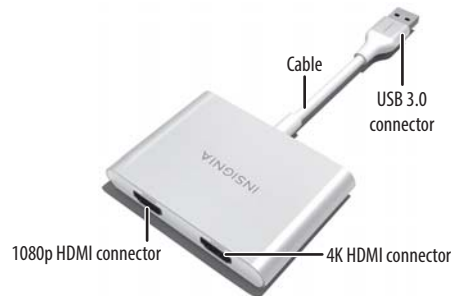

## PACKAGE CONTENTS

- USB to HDMI Multi-Monitor Adapter
- Quick Setup Guide

Before using your new product, please read these instructions to prevent any damage.

## FEATURES

- Connects a laptop to monitors, TVs, projectors, or other displays
- Extends or mirrors a laptop's screen onto two displays
- 4K quality (3840 × 2160 @ 30 Hz) on the first display and 1080p (1920 × 1080 @ 60 Hz) on the second gives you next-generation crystal-clear pictures

## SYSTEM REQUIREMENTS

- Windows 10
- Computer with an available USB 3.0 or 2.0 port
- Office applications/Web:  
CPU: Intel Core i3 Dual Core 2.8 GHz; RAM: 2 GB or higher
- One 2K (2048 × 1152 @ 60 Hz) full-screen video playback  
CPU: Intel Core i5 Quad Core; RAM: 4 GB or higher
- One 4K Ultra HD or two 2K (2048 × 1152 @ 60 Hz) video playback  
CPU: Intel Core i7 Quad Core; RAM: 8 GB or higher;  
Graphics card: Intel HD Graphics 4000/ATI HD 7xxx/NVIDIA 5XXM or higher

## INSTALLING THE DRIVER

- 1 Make sure that your computer is connected to the internet.
- 2 Plug the adapter into a USB port on your computer. The driver installs automatically.

**Note:** If the driver doesn't automatically install, see "Manually installing the Windows driver."


### Manually installing the Windows driver:

If the driver doesn't install automatically, you can download and install it from the internet.

- 1 Go to [www.insigniaproducts.com](http://www.insigniaproducts.com).
- 2 Search for **NS-PU32H4A**, then select the **Support & Downloads** tab to download the installation software.
- 3 On the software license agreement page, click **Accept**. The driver file downloads.
- 4 Open the downloaded \*.EXE file, then follow the on-screen instructions to install the driver.


## UNINSTALLING THE DRIVER

- 1 In the Control Panel, open **Programs and Features**.
- 2 Select **Insignia USB3.0 Display Adapter**, then click **Uninstall**.



## ADJUSTING DISPLAY SETTINGS

- 1 Right-click your computer's desktop, then select **Display** from the pop-up menu.
- 2 Use the available options to change your displays' settings.

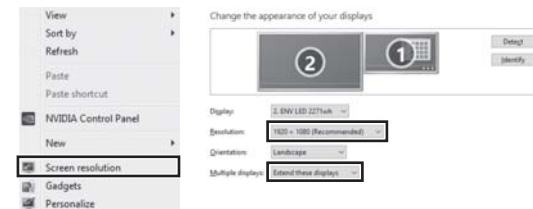

## TROUBLESHOOTING

### Drivers don't work or won't install.

- Uninstall the driver, and then reinstall it.
- Make sure that no other USB to graphics drivers (for example, Displaylink software) are installed on your Windows computer (except for Windows 10). If there are other USB to graphics drivers, uninstall them, then reinstall your adapter's drivers again.
- Make sure that your graphics card drivers are up to date.

### Not displaying correctly on my monitor.

- Check your display settings. See "ADJUSTING DISPLAY SETTINGS" for more information.

## SPECIFICATIONS

- **Dimensions (H × W × D):**  
.9 × 3.3 × 5.2 in. (2.3 × 8.4 × 13.1 cm)
- **Weight:** .24 lbs. (110 g)
- **Supported operating systems:** Windows 10
- **Power supply:** USB bus-powered
- **Supported device:** HDMI TV/monitor
- **Supported max resolutions:**  
Port 1: 3840 × 2160 @ 30 Hz  
Port 2: 1920 × 1080 @ 60 Hz
- **Audio output:** local computer, USB 3.0 audio
- **Computer interface:** USB 3.0 recommended (USB 2.0 compatible). Connect directly to computer. Do not connect the adapter through additional USB interfaces.

## LEGAL NOTICES

### FCC Information

This device complies with Part 15B of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### ICES-003

This Class B digital apparatus complies with Canadian ICES-003;  
Cet appareil numérique de la classe Best conforme à la norme NMB-003 du Canada.

## ONE-YEAR LIMITED WARRANTY

Visit [www.insigniaproducts.com](http://www.insigniaproducts.com) for details.

## CONTACT INSIGNIA:

For customer service, call 877-467-4289  
(U.S. and Canada) or 01-800-926-3000 (Mexico)  
[www.insigniaproducts.com](http://www.insigniaproducts.com)

INSIGNIA is a trademark of Best Buy and its affiliated companies.  
Distributed by Best Buy Purchasing, LLC  
7601 Penn Ave South, Richfield, MN 55423 U.S.A.  
©2020 Best Buy. All rights reserved.