

QUICK SETUP GUIDE

Dual Hard Drive Docking Station

NS-PCHDEDS19 / NS-PCHDEDS19-C

PACKAGE CONTENTS

- Dual Hard Drive Docking Station
- Power adapter (12V/3A)
- USB 3.0 cable (USB 3.0 Type B to USB 3.0 Type A)
- Quick Setup Guide

Note: The **USB 3.0 OUT** port cannot be used to connect a computer, only for device connection such as U disk.

SYSTEM REQUIREMENTS


- Windows® 10, Windows® 8.1, Windows® 8, Windows® 7
- Mac OS X 10.6 and later versions
- Linux 2.4.1 and later versions

Before using your new product, please read these instructions to prevent any damage.


FEATURES

- Compatible with 2.5" and 3.5" SATA hard drives and solid-state drives
- Reads two hard drives simultaneously using a single USB port connection
- Hot-swappable design provides fast file transfers with USB 3.0
- Plug-and-play design makes setup simple
- Release button easily ejects your hard drives
- Works with Windows 10, Windows 8.1, Windows 8, Windows 7, Mac OS X 10.6 or later, and Linux 2.4.1 or later

Front view

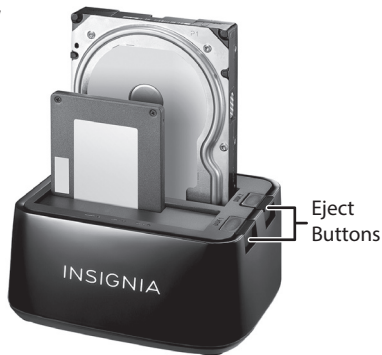


Back panel view

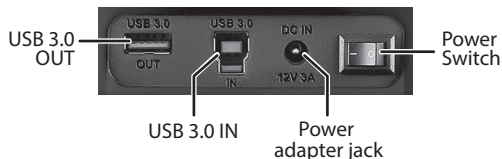


USING YOUR DOCKING STATION

Hard Disk:

- 1 Insert an SSD or HDD into a slot on your docking station. You can use both slots at the same time.
CAUTION: To avoid damaging the equipment, make sure that the SSD/HDD is inserted in the correct direction.
- 2 Connect the USB cable to the **USB 3.0 In** jack on the docking station and to an available USB port on your computer.

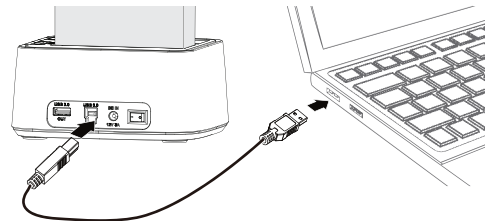


- 3 Connect the power adapter to the **DC IN** jack on the back of your docking station, then turn on your docking station and the computer. The docking station LED blinks until the computer identifies your station, then the LED lights steady.

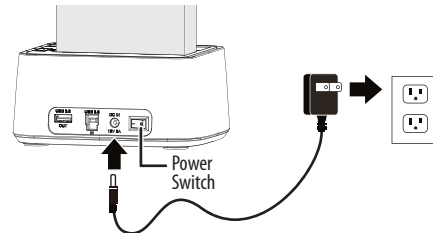

- 4 If this is the first time you are using an SSD or HDD, follow your computer's operating system instructions to format the disk.
- 5 Follow your computer's operating system instructions to transfer data to or from your computer. The docking station LED blinks while data is transferring.
- 6 When the transfer is complete, turn off power to the docking station by pressing the power switch. Press the eject button on the side of your docking station, then remove the SSD or HDD.

USB Devices:

You can use the **USB 3.0 OUT** port to connect USB devices. This jack provides two-way transmission between the USB device and an HDD, an SSD, or a computer.



SPECIFICATION

- **Dimension:** 6.0 × 5.3 × 2.7 in. (152 × 134 × 68 mm)
- **Transmission Port:**
USB 3.0 Type B for computer.
USB 3.0 Type A for other USB devices
- **Transmission Rate:** 5 Gbps (MAX)
- **Work Temperature:** 32°F ~ 122°F (0°C ~ 50°C)
- **Work Humidity:** 20% RH~ 85% RH

LEGAL NOTICES

FCC Information

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

ICES-003

This Class B digital apparatus complies with Canadian ICES-003;
Cet appareil numérique de la classe B est conforme
à la norme NMB-003 du Canada.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA:

For customer service, call 877-467-4289 (U.S. and Canada)
www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies.
Distributed by Best Buy Purchasing, LLC
7601 Penn Ave South, Richfield, MN 55423 U.S.A.
©2022 Best Buy. All rights reserved.