



RAZER KRAKEN KITTY V2 BT

MASTER GUIDE


Unleash your killer kitty style anywhere with the **Razer Kraken Kitty V2 BT**—a wireless Bluetooth headset for gaming and IRL streaming. Powered by Razer Chroma™ RGB, display your unique personality for all to see, as you take your passion to the next level with a full suite of upgraded features.

CONTENTS

1. WHAT'S INSIDE.....	3
2. WHAT'S NEEDED.....	4
3. LET'S GET YOU COVERED.....	4
4. TECHNICAL SPECIFICATIONS.....	5
5. GETTING STARTED	6
6. USING YOUR RAZER KRAKEN KITTY V2 BT	8
7. USING THE APPS.....	11
8. CONFIGURING YOUR HEADSET VIA RAZER SYNAPSE	12
9. SAFETY AND MAINTENANCE.....	20
10. LEGALESE	21

1. WHAT'S INSIDE


- Razer Kraken Kitty V2 BT

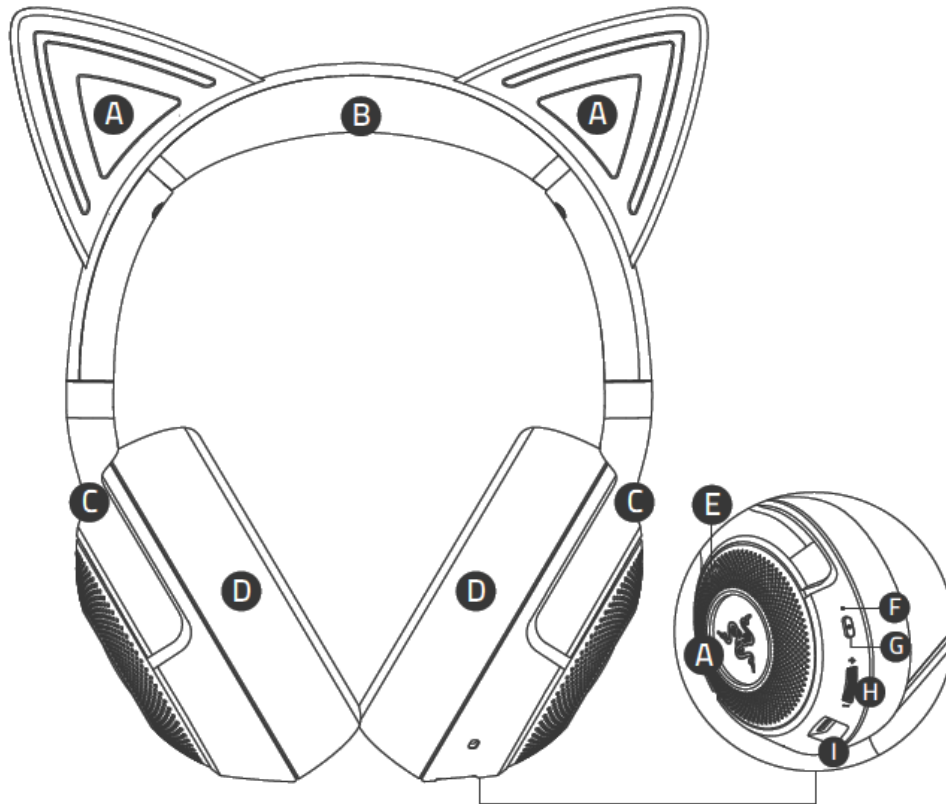

- A.** Kitty ears and earcups powered by Razer Chroma™ RGB
- B.** Adjustable padded headband
- C.** Circumaural earcup design
- D.** Plush leatherette foam ear cushions


- E.** Beamforming noise-canceling microphones
- F.** Status Indicator
- G.** Power button
- H.** Volume dial
- I.** Charging port

- USB Type A to Type C cable




- Important Product Information Guide

2. WHAT'S NEEDED

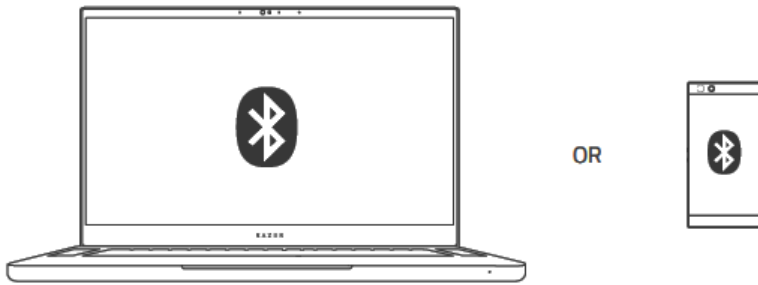

3. LET'S GET YOU COVERED

Your product's serial number can be found here.

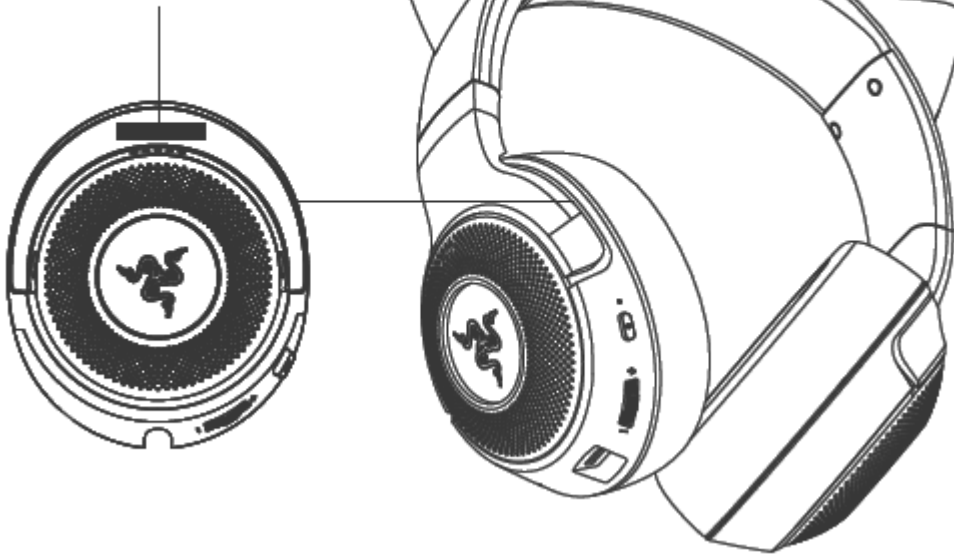

Register your product and score exclusive benefits

razerid.razer.com/warranty

4. TECHNICAL SPECIFICATIONS

HEADPHONES

- Ears: Fixed Kitty Ears
- RGB: 2 Razer Chroma™ RGB Zones (Ear and Earcups)
- Frequency response: 20 Hz – 20 kHz
- Impedance: 32 Ohms
- Sensitivity: 92.5 dB SPL/mW @ 1 KHz
- Drivers: Customized Dynamic 40 mm Driver
- Inner ear cup diameter: 61 x 43 mm
- Connection type: Bluetooth 5.2
- Approx. weight: Est. 325 g / 0.72 lbs
- Oval ear cushions: Full-ear fabric and plush leatherette

MICROPHONE

- Frequency response: 100 Hz – 10 kHz
- Signal-to-noise ratio: ≥ 60 dB
- Sensitivity (@1 kHz): -42 dBV/Pa
- Pick-up pattern: Omnidirectional

ON-EARCUP CONTROLS

- Volume up and down
- Power On / Pairing / Multi-Function Button


AUDIO USAGE

- Bluetooth Connection: Mobile / System
- Surround sound: Only available on Windows 10 64-bit (or higher)


5. GETTING STARTED

CHARGING

1

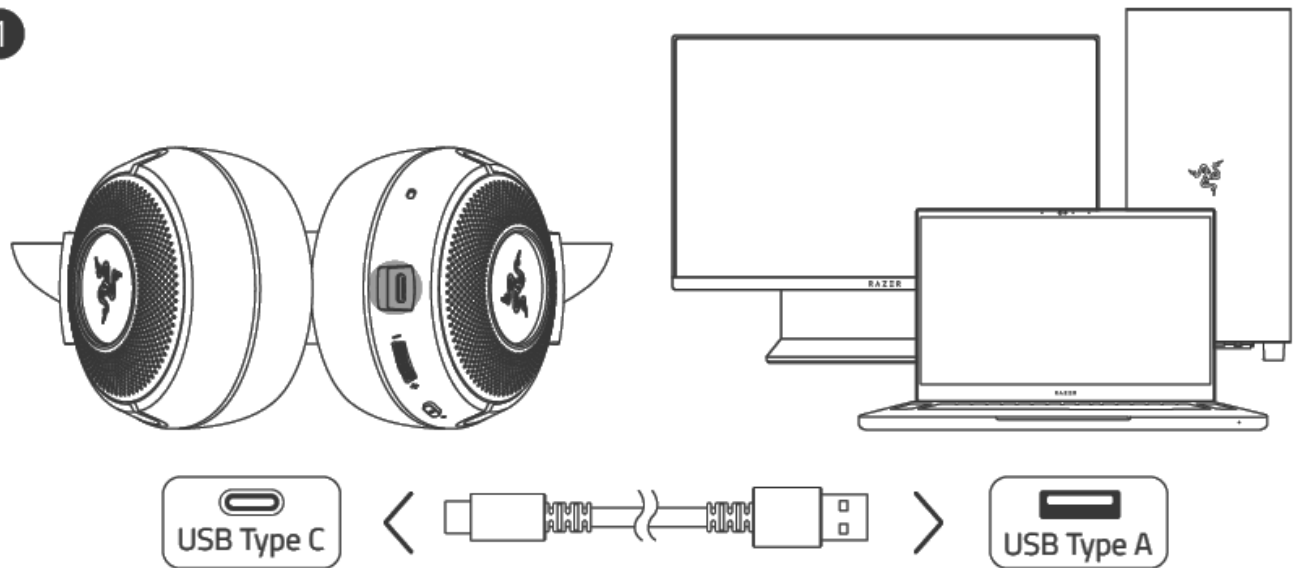


2

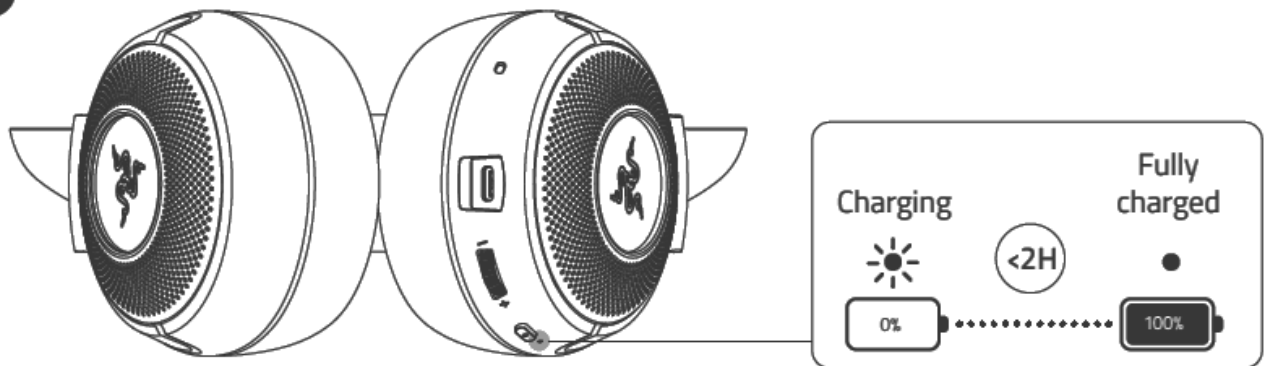


For best results, connect your Razer Kraken Kitty V2 BT directly to the USB port of your computer using the provided charging cable.

POWER ON/OFF

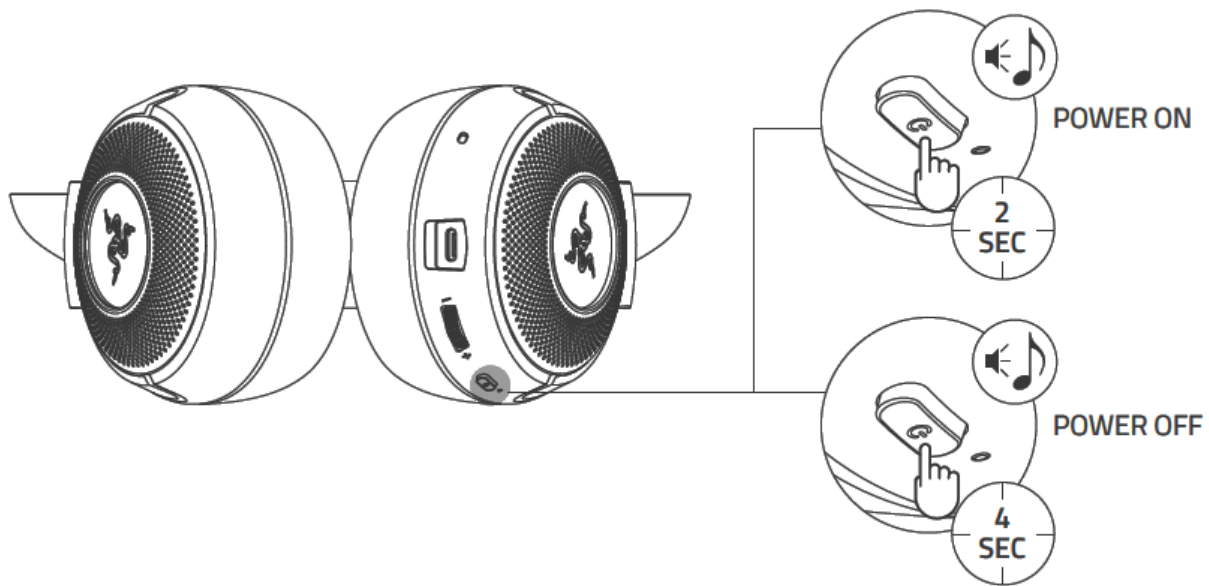


PAIRING

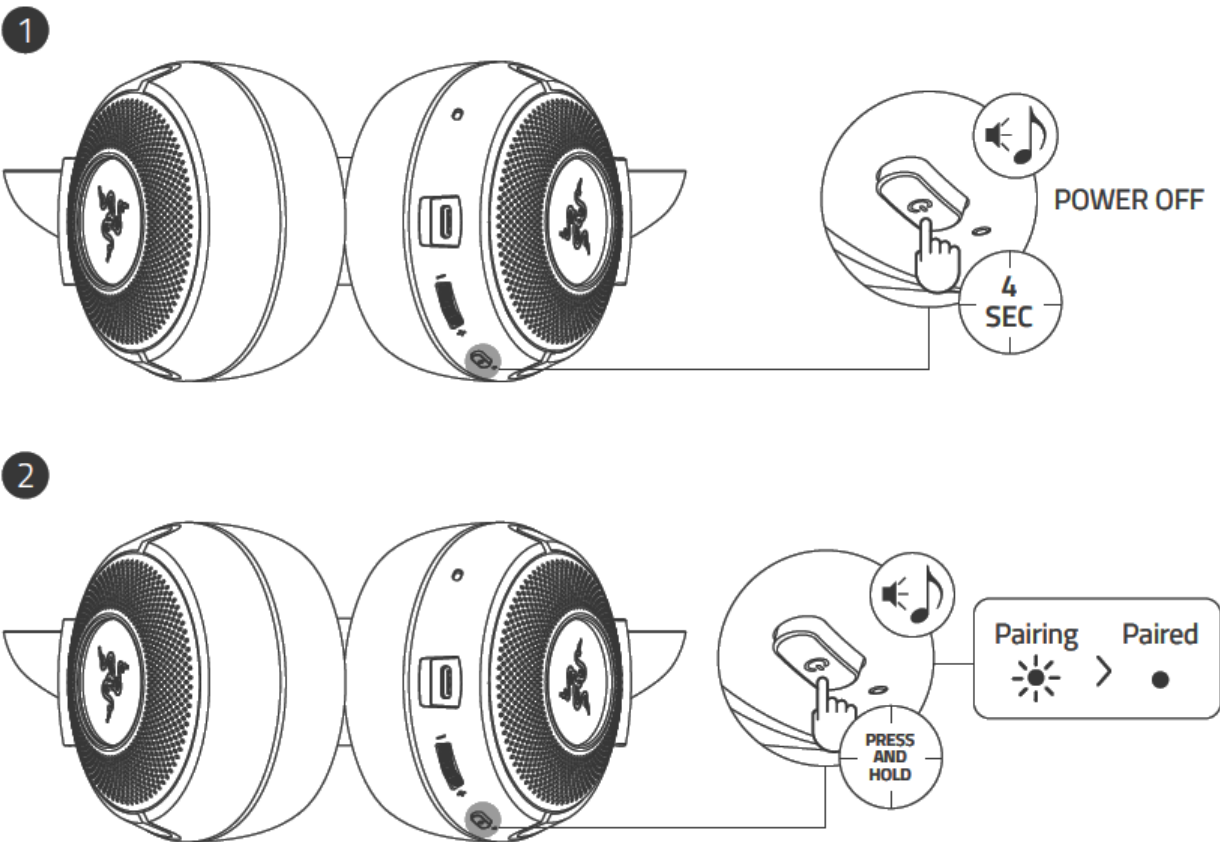


i Follow your device's instructions to pair it with your Razer Kraken Kitty V2 BT. While pairing, keep your headset within a very close distance of the audio source.

6. USING YOUR RAZER KRAKEN KITTY V2 BT

BATTERY LEVEL

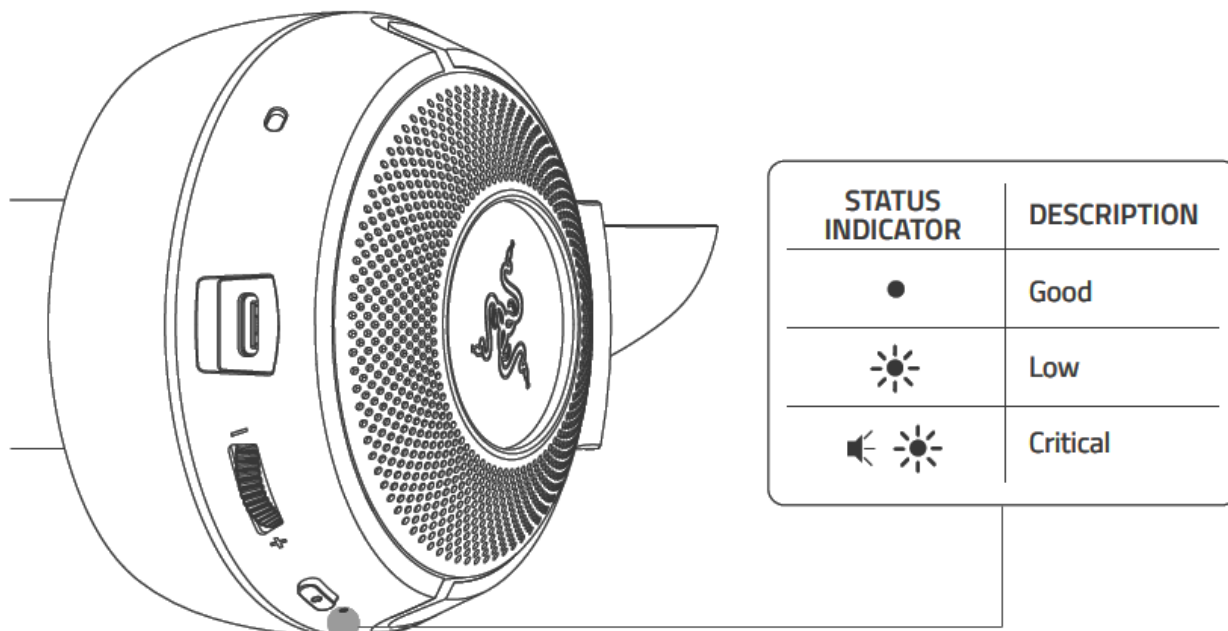


GAMING MODE

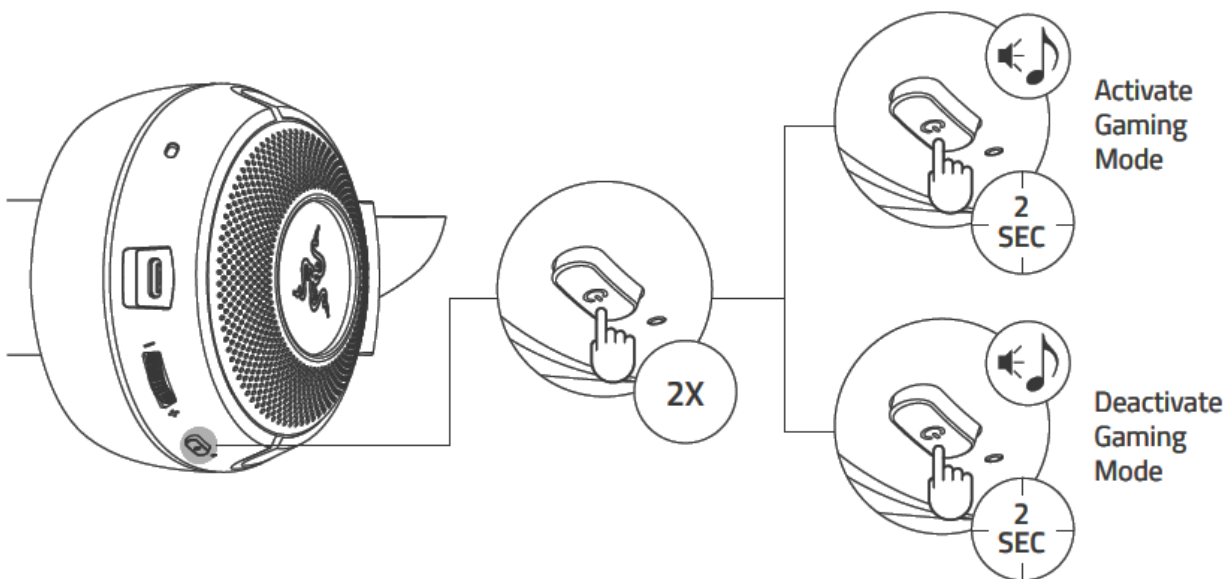


i For best performance, it is recommended to keep your headset within a very close distance of the audio source.

VOLUME DIAL

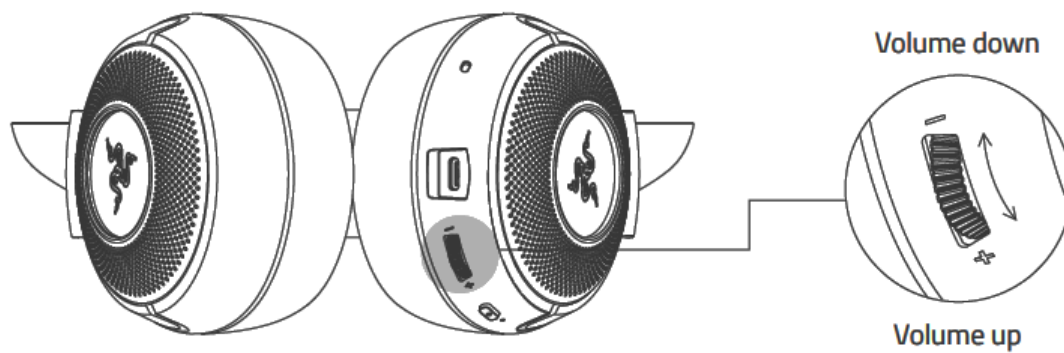


MULTIPOINT PAIRING

1

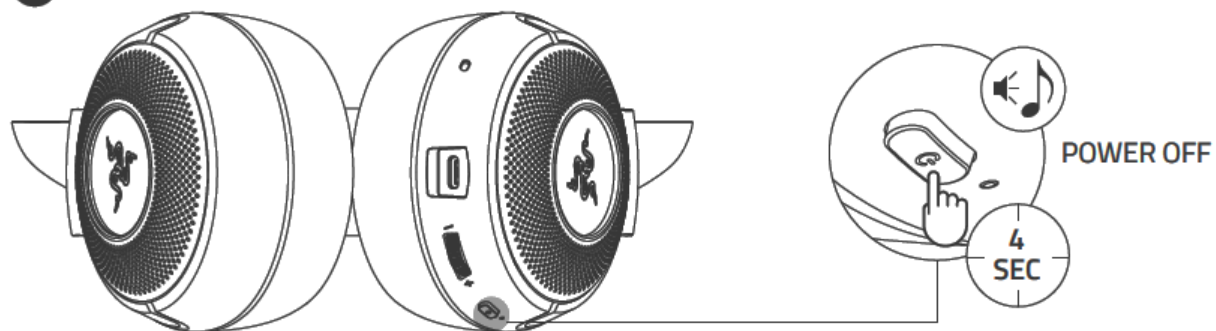

2

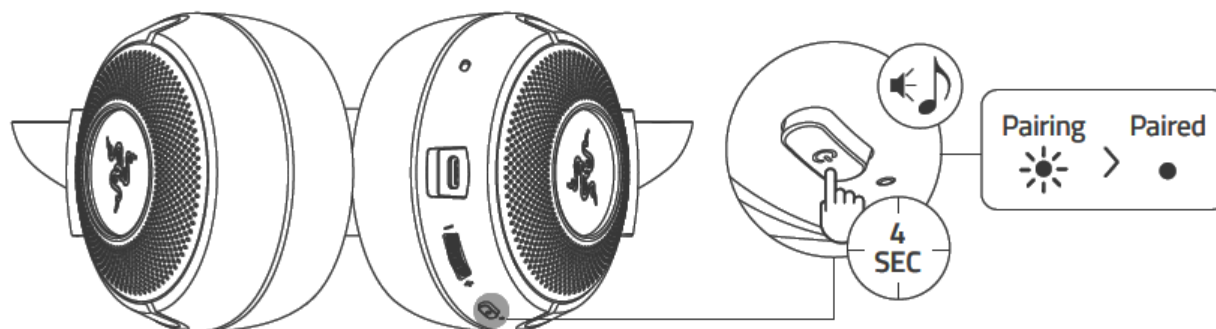


OTHER FUNCTIONS

i Some features listed here may not be applicable to certain devices.

Single press	Play/pause
	Accept incoming call or end current call
	Put call on-hold and accept incoming call
	End call and swap to on-hold call
Press and hold for 2 seconds	Launch voice command
	Reject incoming call
	Swap calls
Double press	Skip track
Triple press	Previous track

COMFORT

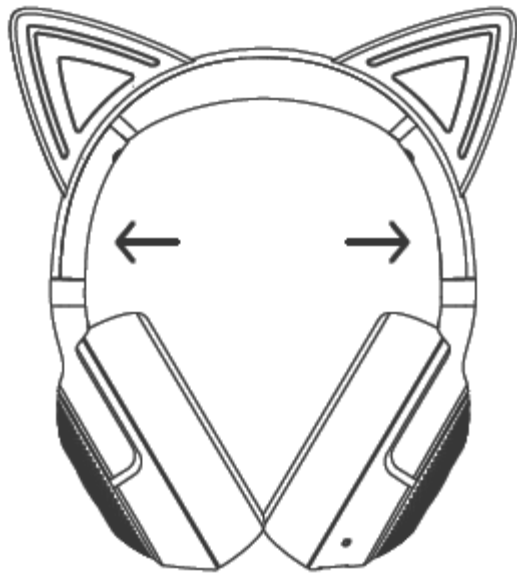

i Gently stretch the headbands before wearing the headset but do not overstretch it to avoid permanent damage.

7. USING THE APPS

RAZER AUDIO APP (MOBILE DEVICES)

Making advanced customization just got a whole lot easier for your Razer Kraken Kitty V2 BT. With its own mobile app, you can select or create your own equalizer preset, customize the headset's lighting and much more—anytime, anywhere.



1. Download the mobile app on your mobile device.
2. Launch the app and follow the onscreen instructions.

i *Only available on iOS 14 / Android 10 (or higher) devices with Bluetooth 5.0 connectivity.*

RAZER SYNAPSE (PC)



Use the Razer Synapse* app to select or customize audio and mic presets, adjust its power-saving feature, and even personalize its lighting for an immersive gaming experience that's truly yours.

i *Make sure that your Razer Kraken Kitty V2 BT is connected to your PC via Bluetooth. Only available on Windows 10 64-bit (or higher). Install Razer Synapse when prompted or download the installer from [razer.com/synapse](https://www.razer.com/synapse).*

Find out more about your gaming-grade headset at support.razer.com.

8. CONFIGURING YOUR HEADSET VIA RAZER SYNAPSE


i Internet connection is required for installation, updates and cloud-based features. Registering for a Razer ID account is recommended, but optional. All listed features are subject to change based on the current software version, connected device(s), and supported apps and software.

SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse where you can access all your Razer devices, modules, and online services.

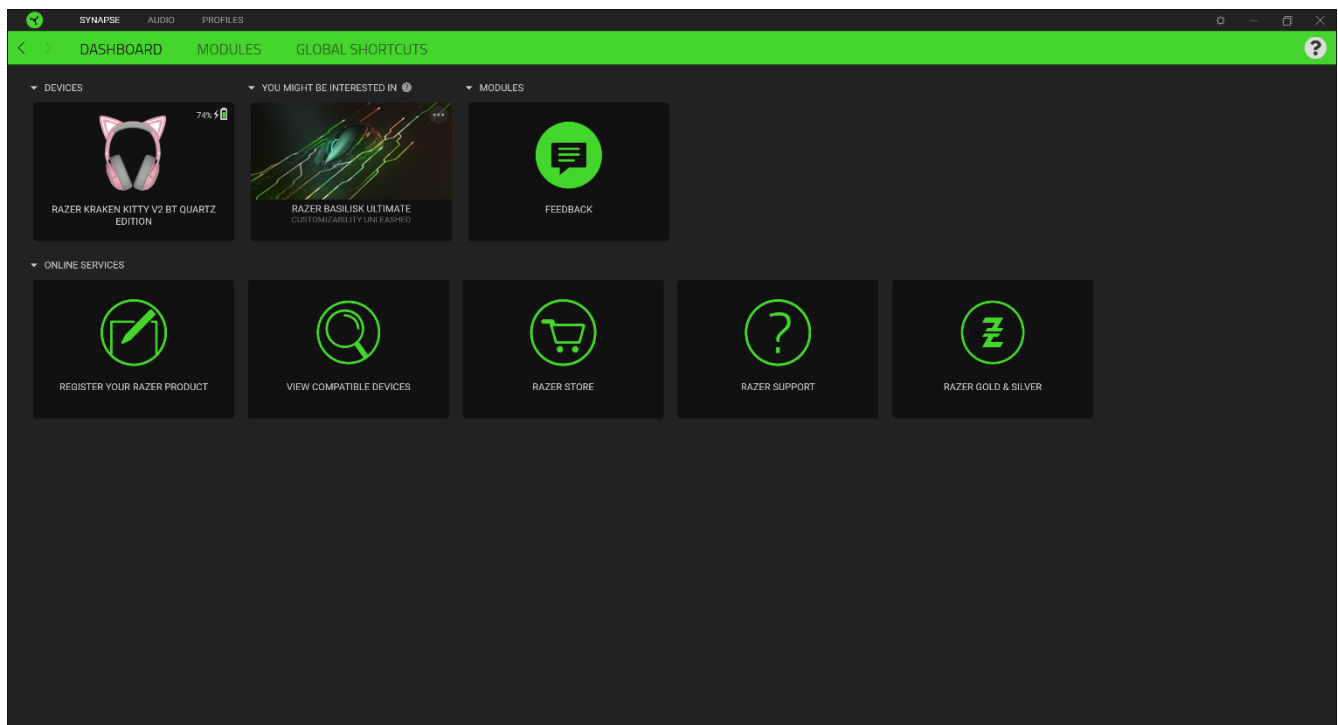

Modules


The Modules subtab displays all installed and available modules for installation.

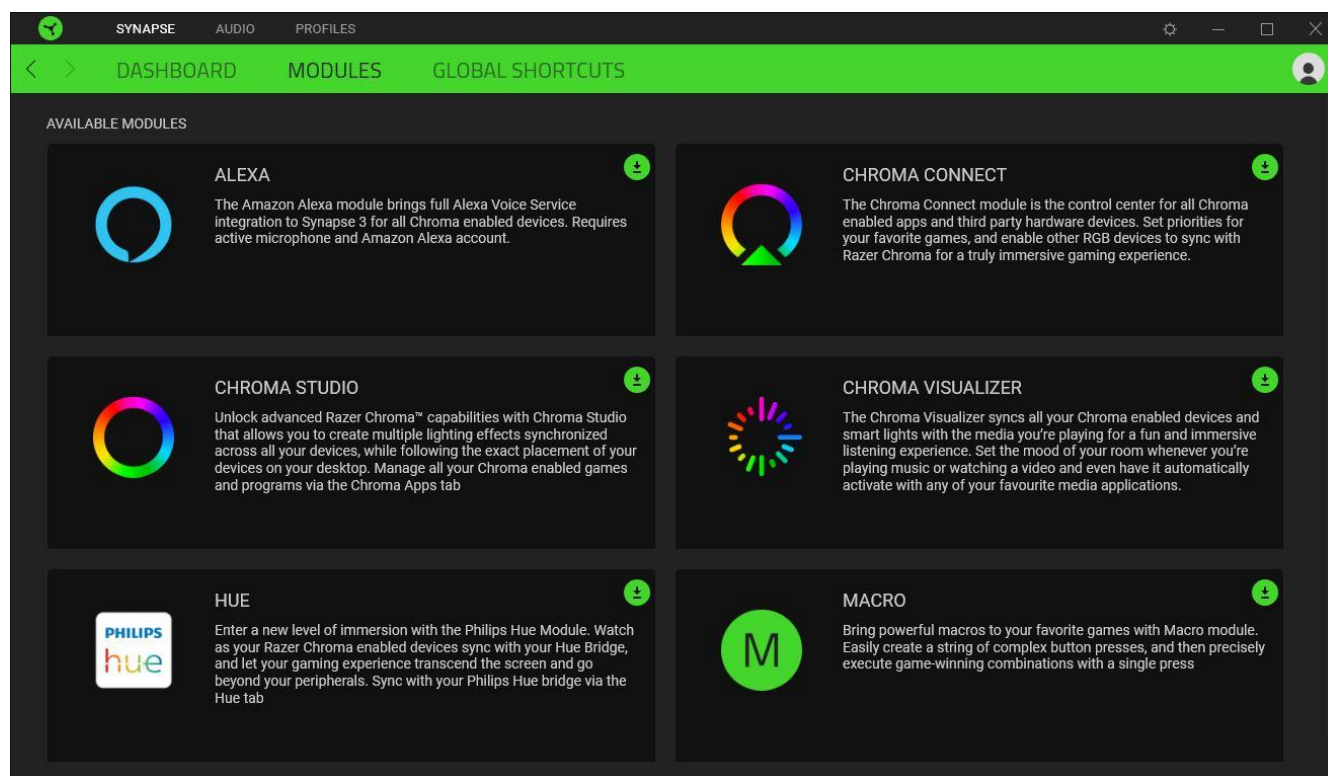

Global Shortcuts

Bind operations or Razer Synapse functions to custom key-combinations from any Razer Synapse-enabled device inputs which apply across all device profiles. [Learn more about Profiles](#)

 *Only Razer Synapse-enabled device inputs will be recognized.*

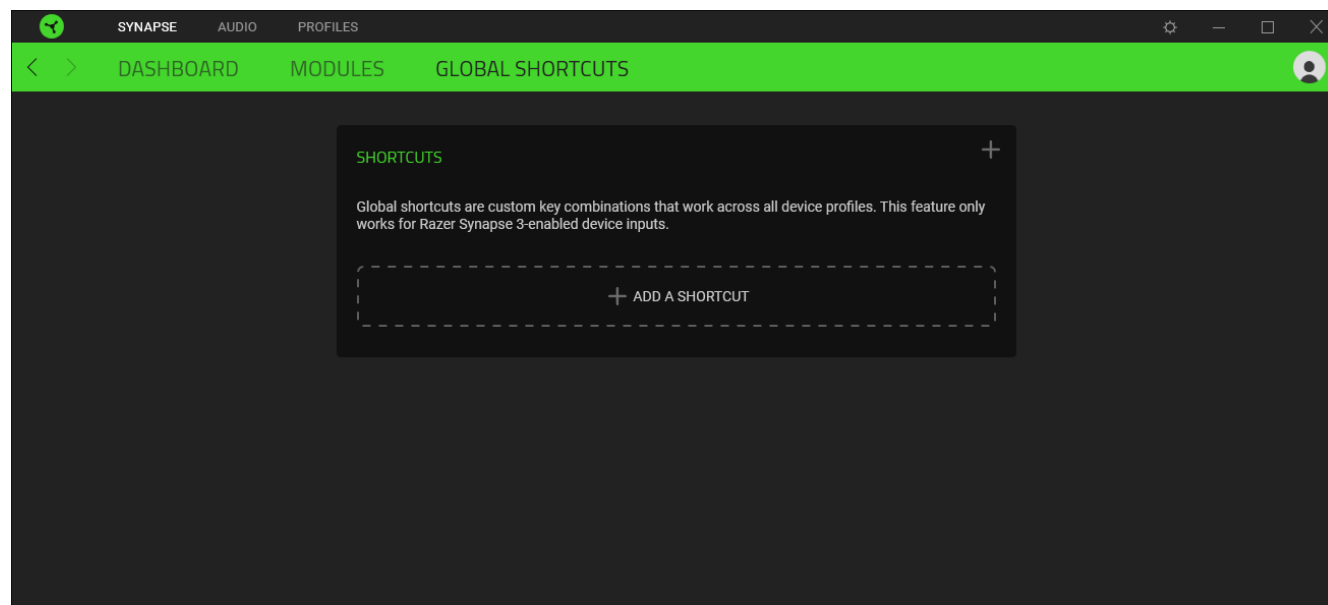


AUDIO TAB

The Audio tab is the main tab for your Razer Kraken Kitty V2 BT. From here, you can customize your device's settings to unleash its full potential. Changes made under this tab are automatically saved to your system and cloud storage.

Sound

The Sound subtab is for adjusting your device's volume, selecting or customizing your preferred audio equalizer preset and accessing Windows Sound properties.

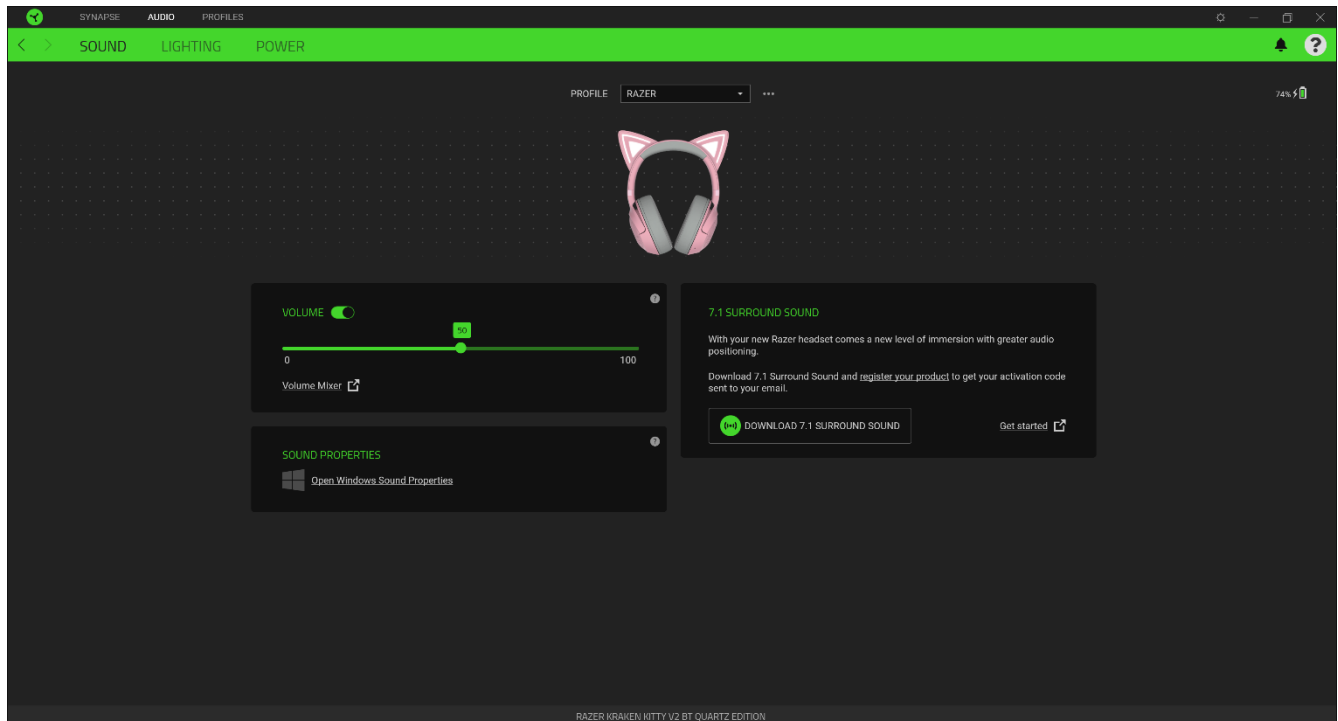

Profile

Profile is a data storage for keeping all your Razer peripheral's settings. By default, the profile name is based on your system's name. To add, rename, duplicate, or delete a profile, simply press the Miscellaneous button (●●●).

Volume


Adjust the audio volume of the device. You may also access the Windows Volume mixer of the current playback device where you can proportionally adjust the overall volume of the system or individually adjust the volume of each active application.

Sound Properties

Launch the Windows sound properties window to manage the sound settings of your system such as modifying the playback and recording device settings, sound scheme and default communications activity.

Lighting

The Lighting subtab enables you to modify your Razer device's light settings.

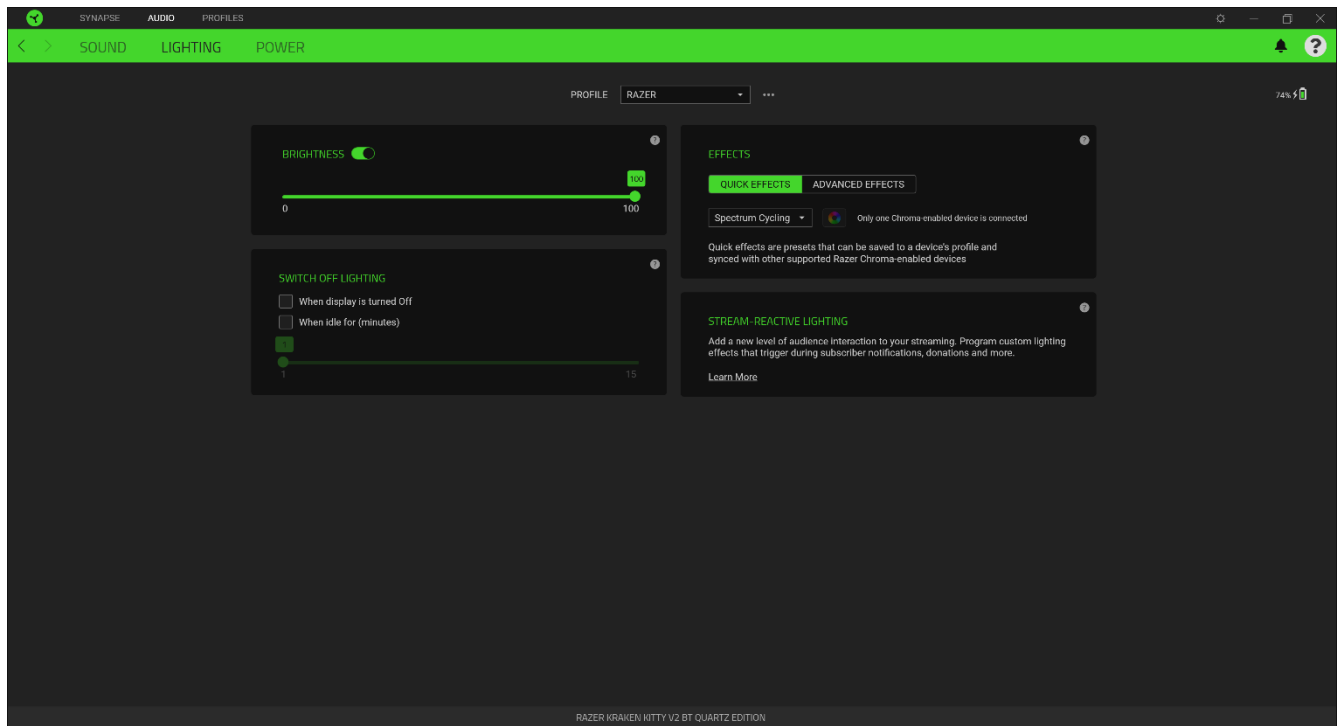




Brightness

You can turn off your Razer device's lighting by toggling the Brightness option or increase/decrease the luminance using the slider.

Effects

A number of effects can be selected and applied to your headset's lighting, as listed here:


	Name	Description	How to set up
	Audio meter	The earcups will light up according to the audio level with a default spectrum of colors	Select a Color Boost level
	Breathing	The lighting will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors
	Spectrum cycling	The lighting will cycle between 16.8 million colors indefinitely	No further customization required



Static


The earcups will remain lit in the selected color

Select a color

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button ().

 *Only devices that support the selected lighting effect will synchronize.*


Advanced Effects

The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled peripheral. To start making your own Chroma Effect, simply press the Chroma Studio button ().

 *The Chroma Studio module is required to use this function.*

Power

The Power subtab allows you to manage your device's energy consumption by setting it to power off when it has been idle for a certain amount of time.

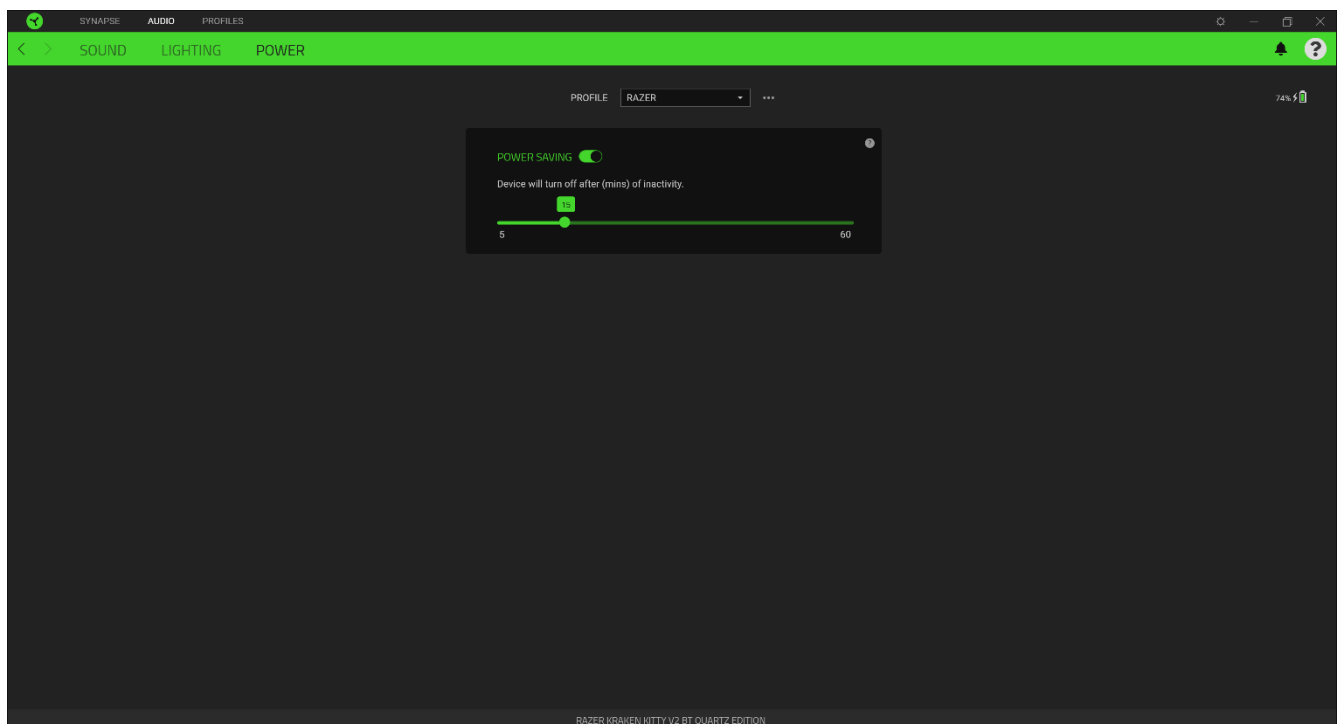





PROFILES TAB

The Profiles tab is a convenient way of managing all your profiles and linking them to your games and applications.

Devices

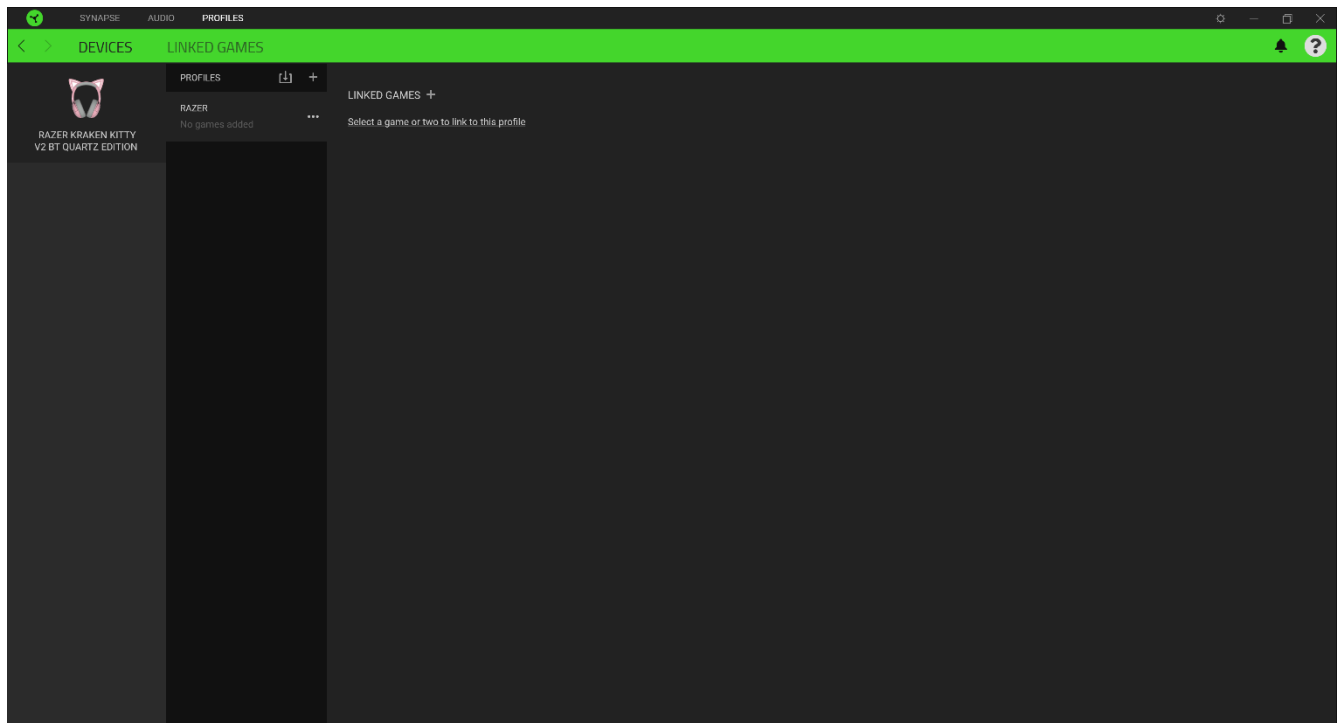
View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.



You can import Profiles from your computer or from the cloud through the import button () or create new profiles within the selected device using the add button (). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (). Each profile can be set to automatically activate when you run an application using the Linked Games option.

Linked Games


The Linked Games subtab gives you the flexibility to add games, view devices that are linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here even if it is not linked to a Razer device.

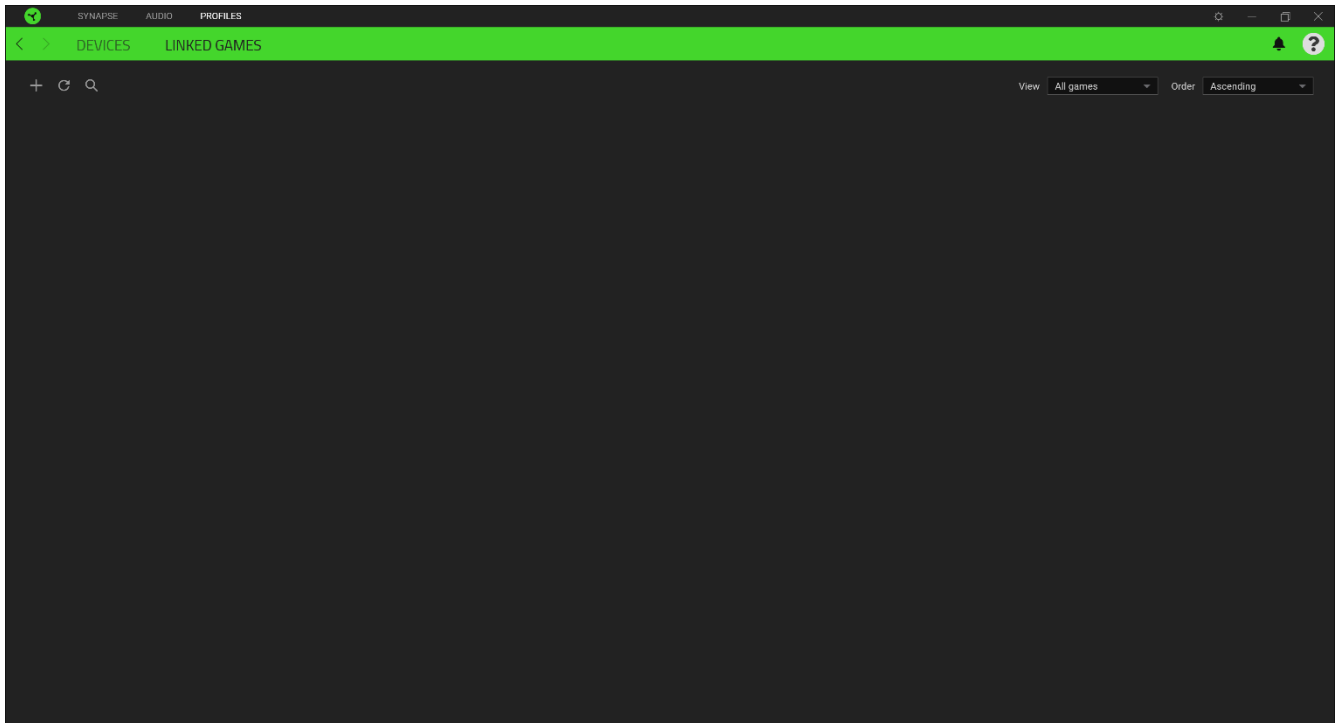

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once linked, you may click on the Miscellaneous button (●●●) of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

SETTINGS WINDOW

The Settings window, accessible by clicking the (⚙) button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, view the master guides of each connected Razer device, or perform factory reset on any connected Razer device.

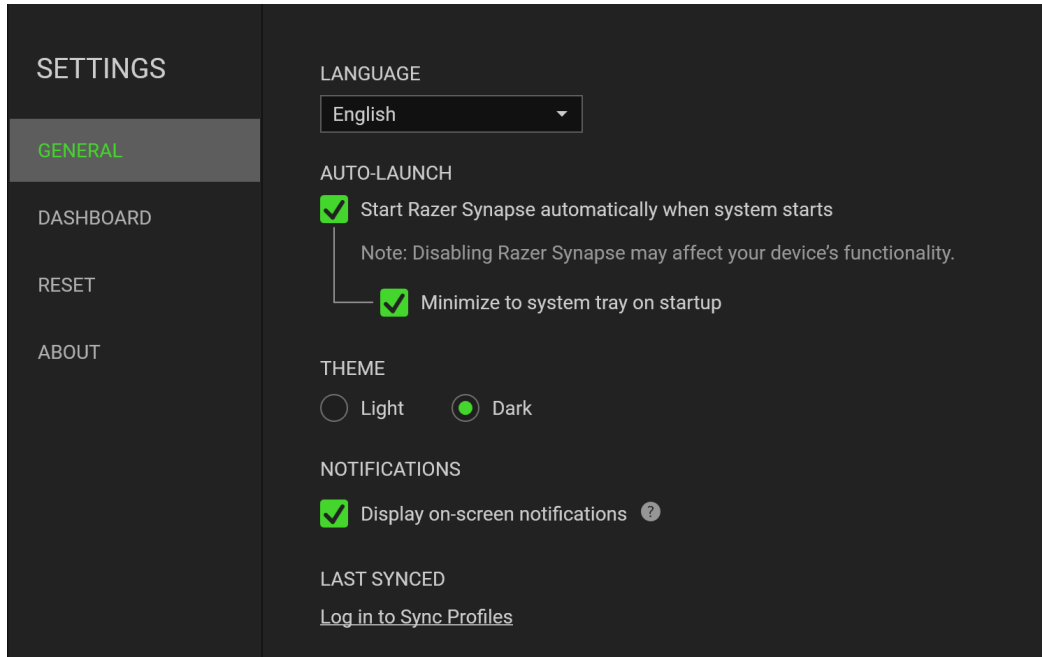

General tab

The default tab of the Settings window. The General tab enables you to change the software's display language, start-up behavior, display theme, and on-screen notifications display. You may also manually sync your profiles to the cloud (↻) or view the master guide of all connected Razer devices and installed modules.

Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.



By resetting a Razer device, all profiles stored on the selected device's on-board memory will be erased.

About tab

The About tab displays brief software information, copyright statement and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as a quick access to Razer's social communities.

9. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer Kraken Kitty V2 BT, we suggest that you adopt the following guidelines:

Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for assistance.

Do not take apart the device (doing so will void your warranty) and do not attempt to operate it under abnormal current loads.

Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device in order to let the temperature stabilize to an optimal level.

The device isolates external ambient sounds even at low volumes, resulting in lowered awareness of your external surroundings. Please remove the device when engaging in any activities that requires active awareness of your surroundings.

Listening to excessively loud volumes over extended periods of time can damage your hearing. Furthermore, legislation of certain countries permits a maximum sound level of 86db to affect your hearing for 8 hours a day. We therefore recommend that you reduce the volume to a comfortable level when listening for prolonged periods of time. Please, take good care of your hearing.

MAINTENANCE AND USE

The Razer Kraken Kitty V2 BT requires minimum maintenance to keep it in optimum condition. Once a month we recommend you clean it using a soft cloth or cotton swab to prevent dirt buildup. Do not use soap or harsh cleaning agents.

BATTERY WARNING

The Razer Kraken Kitty V2 BT contains a Li-ion rechargeable battery. In general, the life expectancy of such batteries is dependent upon usage. If you suspect that the Li-ion rechargeable battery inside the Razer Kraken Kitty V2 BT may be drained (has a low charge), try charging it.

Caution: Do not open, mutilate, or expose to conducting materials (metal), moisture, liquid, fire, or heat. Doing so may cause batteries to leak or explode, resulting in personal injury. Battery life varies with usage.

10. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2023 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, and "For Gamers. By Gamers." are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States and other countries. Actual product may differ from pictures. All other trademarks are the property of their respective owners. Warranty not valid outside of product's intended region.

©2018 Google LLC All rights reserved. Android, Google, Google Logo, Google Play, and the Google Play logo are registered trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Kraken Kitty V2 BT (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in

so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.