



# RAZER USB C DOCK

MASTER GUIDE

Maximize your port selection both at home or on-the-go with the **Razer USB C Dock**. This portable powerhouse features HDMI, Gigabit Ethernet, a 3.5mm audio jack, additional USB-A and USB C ports - all in a lightweight but durable package to complete any Windows or Mac device setup.


# CONTENTS

1. WHAT'S INSIDE .....	3
2. WHAT'S NEEDED .....	4
3. LET'S GET YOU COVERED .....	4
4. TECHNICAL SPECIFICATIONS.....	5
5. SETTING UP YOUR RAZER USB C DOCK .....	6
6. SAFETY AND MAINTENANCE .....	7
7. LEGALESE.....	8

---

## 1. WHAT'S INSIDE

- Razer USB C Dock

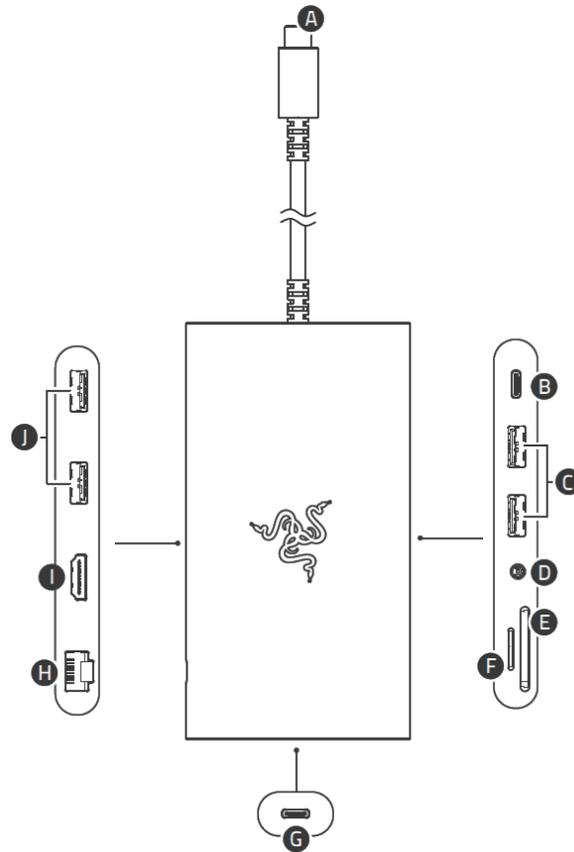

- A. USB 3.2 Type C connector
- B. USB 3.2 Type C port
- C. 2x USB 2.0 Type A ports
- D. 3.5mm audio combo jack powered by Razer 7.1 Surround Sound
- E. SD UHS-I card slot
- F. MicroSD UHS-I card slot
- G. USB Type C Power Delivery (PD) port\*
- H. Gigabit Ethernet (RJ-45) port
- I. HDMI™ port (supports 4k@60Hz)
- J. 2x USB 3.2 Type A ports

- Important Product Information Guide

*\*Supports 20V USB PD 3.0 charging of up to 100W*

---

## 2. WHAT'S NEEDED


### PRODUCT REQUIREMENTS

- Devices\* with an operating system and a USB Type-C port

\*Full compatibility list available here: [razer.com/gaming-pc-accessories/razer-usb-c-dock](https://www.razer.com/gaming-pc-accessories/razer-usb-c-dock)

---

## 3. LET'S GET YOU COVERED

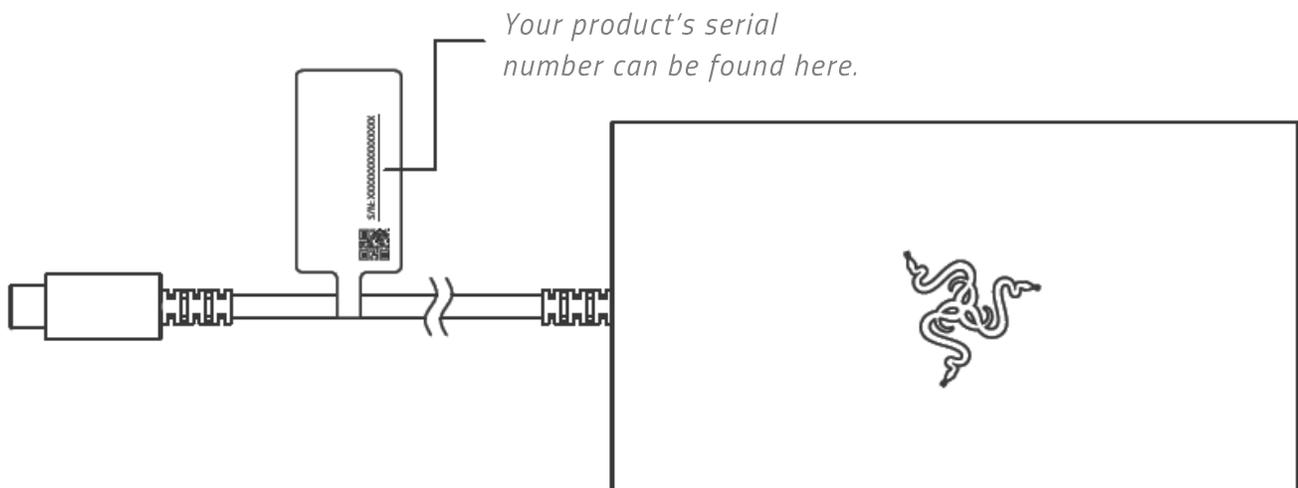

Register your product and score exclusive benefits

[razerid.razer.com/warranty](https://www.razerid.razer.com/warranty)

---

## 4. TECHNICAL SPECIFICATIONS

Connection Type: USB C

Input & Output:

- USB C (Input)
- 1 x USB C 3.2 (10Gbps), 1 x USB C with 85 W PD (100 W PD IN)
- 2 x USB-A 3.2 Gen 2
- 2 x USB-A 2.0
- 1 x Gigabit Ethernet
- SD Card Reader, UHS-I
- MicroSD

Audio: 3.5mm headphone/microphone combo port with 7.1 surround sound

Display Output Via HDMI, Supported Resolutions:

- 3840x2160p – 60Hz, 50Hz, 30Hz, and 24Hz refresh rates
- 2560x1440p – 144Hz, 120Hz, and 60Hz refresh rates
- 1920x1080p – 240Hz, 144Hz, 120Hz, 60Hz, 50Hz, 30Hz, and 24Hz refresh rates
- 1366x768p – 240Hz, 144Hz, 120Hz, and 60Hz refresh rates
- 1280x720p – 240Hz, 144Hz, 120Hz, 60Hz, and 50 Hz refresh rates

Compatibility:

- Windows 10 or later PCs with USB C
- Mac Systems w/MacOS 10.13 or later

Laptop Power Delivery: Up to 85 Watts via USB C



USB C Cable Length: 0.2m / 0.66 ft.

Finish: Black or Mercury Aluminum Alloy

Dimensions: 130mm x 70mm x 15.5mm

Weight: 185g / 0.41 lbs.

## 5. SETTING UP YOUR RAZER USB C DOCK

ITEM	SUPPORTED DEVICES	DESCRIPTION
<b>A.</b> USB 3.2 Type C connector		Connect to a USB Type C host device/computer that supports DisplayPort (DP Alt Mode) and USB Power Delivery (PD) (Up to 85W for charging devices)
<b>B.</b> USB 3.2 Type C port		Connect to a USB Type C device that supports data transfer of up to 10Gb/s and 1.5A power output
<b>C.</b> USB 2.0 Type A ports		Connect to a USB Type A device that supports data transfer of up to 480Mb/s
<b>D.</b> 3.5mm audio combo jack powered by Razer 7.1 Surround Sound		Plug in an audio speaker or microphone; or plug in a headphone to experience 7.1 surround sound
<b>E.</b> SD UHS-I card slot		Insert an SD card to copy files to and from your device at a transfer rate of up to 104MB/s
<b>F.</b> microSD UHS-I card slot		Insert a microSD card to copy files to and from your device at a transfer rate of up to 104MB/s
<b>G.</b> USB Type C Power Delivery (PD) port		Connect to a USB Type C PD charger to charge your (PD) port devices. Supports 20V USB PD 3.0 charging of up to 100W
<b>H.</b> Gigabit Ethernet (RJ-45) port		Connect to a router or modem at 10/100/1000 Mb/s Half/full duplex transmission
<b>I.</b> HDMI™ port		Connect to a device to stream videos up to 4K resolution at 60Hz refresh rate
<b>J.</b> USB 3.2 Type A ports		Connect to a USB Type A device that supports data transfer of up to 10 Gb/s

---

## 6. SAFETY AND MAINTENANCE

### SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer USB C Dock, we suggest that you adopt the following guidelines:

Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to for assistance.

Do not take apart the device (doing so will void your warranty) and do not attempt to operate it under abnormal current loads.

Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device in order to let the temperature stabilize to an optimal level.

### MAINTENANCE AND USE

The Razer USB C Dock requires minimum maintenance to keep it in optimum condition. Once a month we recommend you unplug the device from the computer and clean it using a soft cloth or cotton swab to prevent dirt buildup. Do not use soap or harsh cleaning agents.

---

## 7. LEGALESE

### COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2025 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, and “For Gamers. By Gamers.”, are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States or other countries. All other trademarks are the property of their respective owners.

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



Razer Inc. (“Razer”) may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer USB C Dock (the “Product”) may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

### LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

### LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer’s liability exceed the retail purchase price of the Product.

### GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.