

MARINE GRADE UNIVERSAL RGB LED STRIP - 5 METERS

The SPXRGB5 light strip can be cut every 2 inches and installed with 3M peel-and-stick adhesive backing. The light strip operates within an 11-14.8 VDC range and can be used stand alone for basic solid colors or with the Stinger SPXRGB5 RGB Controller for multiple color-changing options and lighting effects.

Basic Wiring

1. Cut light strip to length at solder pads indicated by the scissor icon and line. Fig A
2. Remove rubber coating and adhesive from the front and back of the solder pads.
3. If using a RGB controller, solder the 4 control wires (FIG.B). For a solid color, refer to the table below and solder appropriate wires.

SPECIFICATIONS

- 5 Meters / 16.4 Feet
- 60 5050 LEDs per meter
- Voltage: 11-14.8 VDC,
- Current Draw: 1.2A per meter

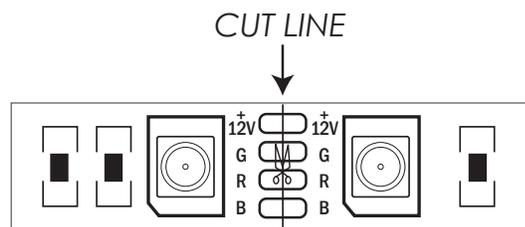


FIG. A

LED COLOR	WIRE CONNECTIONS
RED	+12V to 12V Positive R to Ground
GREEN	+12V to 12V Positive G to Ground
BLUE	+12V to 12V Positive B to Ground
YELLOW	+12V to 12V Positive R and G to Ground
PURPLE	+12V to 12V Positive R and B to Ground
AQUA	+12V to 12V Positive B and G to Ground
WHITE	+12V to 12V Positive R, G and B to Ground


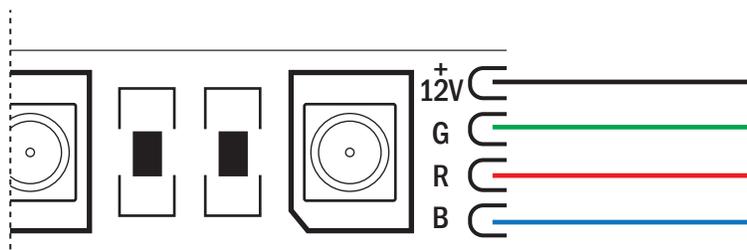



FIG. B

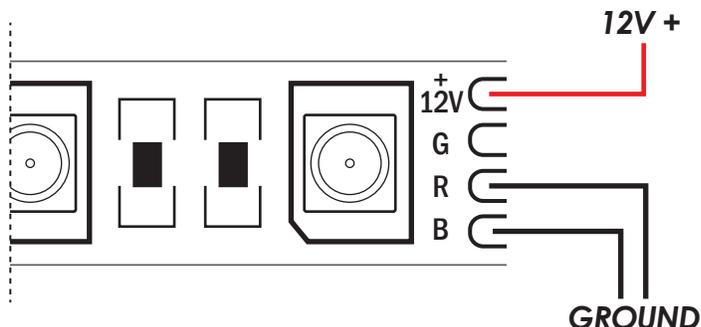

Example:
Connecting LED strip +12V to Power and connecting R and B to Ground will illuminate Purple.


MARINE GRADE UNIVERSAL RGB LED STRIP - 5 METERS

4. When soldering, tin both the wire and the LED solder pad for best results. After wire connections are made, insulate with heat shrink. (FIG. C)

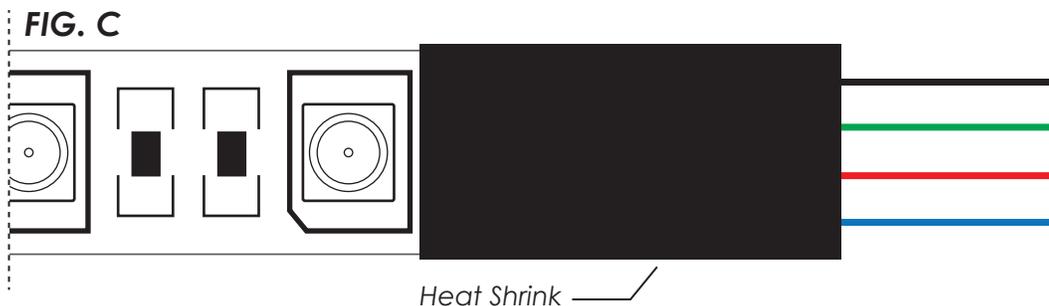

5. If wiring direct, without a controller, you must fuse the +12V power source with a fuse. 3 to 5 amp fuse recommended.

OPTIONAL ACCESSORIES

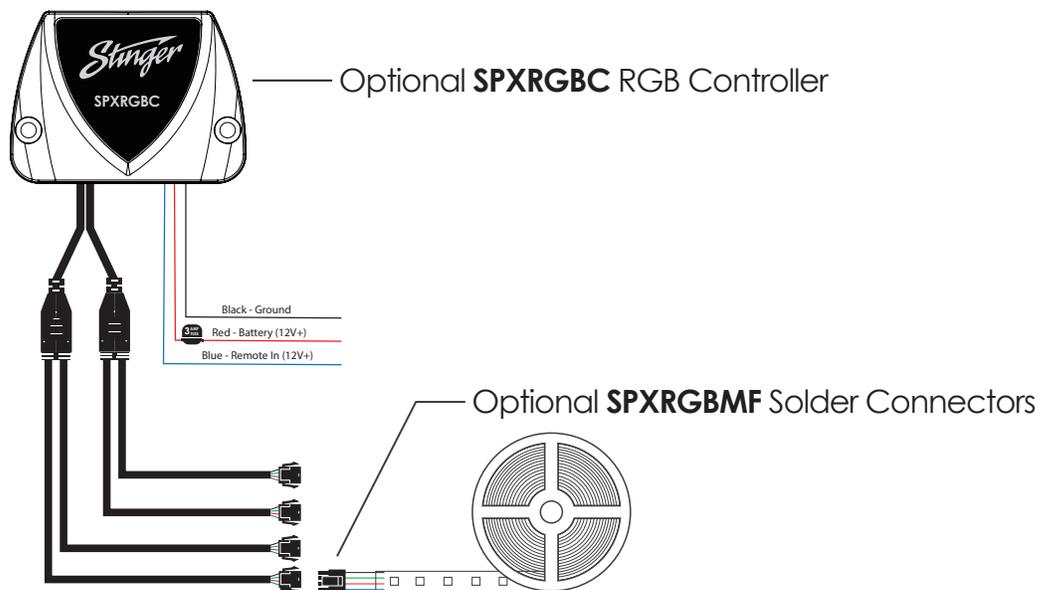

LIMITED WARRANTY:

Stinger warrants this product to be free of defects in materials and workmanship for a period of one (1) years from the original date of purchase. This warranty is not transferable and applies only to the original purchaser from an authorized Stinger dealer in the United States of America only. Should service be necessary under this warranty for any reason due to manufacturing defect or malfunction, Stinger will (at its discretion), repair or replace the defective product with new or remanufactured product at no charge. Damage caused by the following is not covered under warranty: accident, misuse, abuse, product modification or neglect, failure to follow installation instructions, unauthorized repair attempts, misrepresentations by the seller. This warranty does not cover incidental or consequential damages and does not cover the cost of removing or reinstalling the unit(s). Cosmetic damage due to accident or normal wear and tear is not covered under warranty.

INTERNATIONAL WARRANTIES:

Products purchased outside the United States of America are covered only by that country's Authorized Stinger reseller and not by Stinger. Consumers needing service or warranty information for these products must contact that country's reseller for information.

TECHNICAL SUPPORT:

727-592-5991
 Mon-Fri 9AM-8PM EST
 Sat 9AM-7PM EST
 support@aampglobal.com

Stinger is a Power Brand of **AAMP Global**
 15500 Lightwave, Clearwater, Florida 33760
 P: 888-228-5560

support@stingerelectronics.com
 www.stingerelectronics.com
 © 2019 AAMP Global