JBL by HARMAN

Bar 5.1

5.1-Channel 4K Ultra HD Soundbar with True Wireless Surround Speakers

Quick Start Guide

Bluetooth · DOLBY AUDIO · dts Digital Surround · HDMI

Note: For complete information about using all of your JBL Bar 5.1, download the full Owner's Manual from www.jbl.com.

1 What's in the box

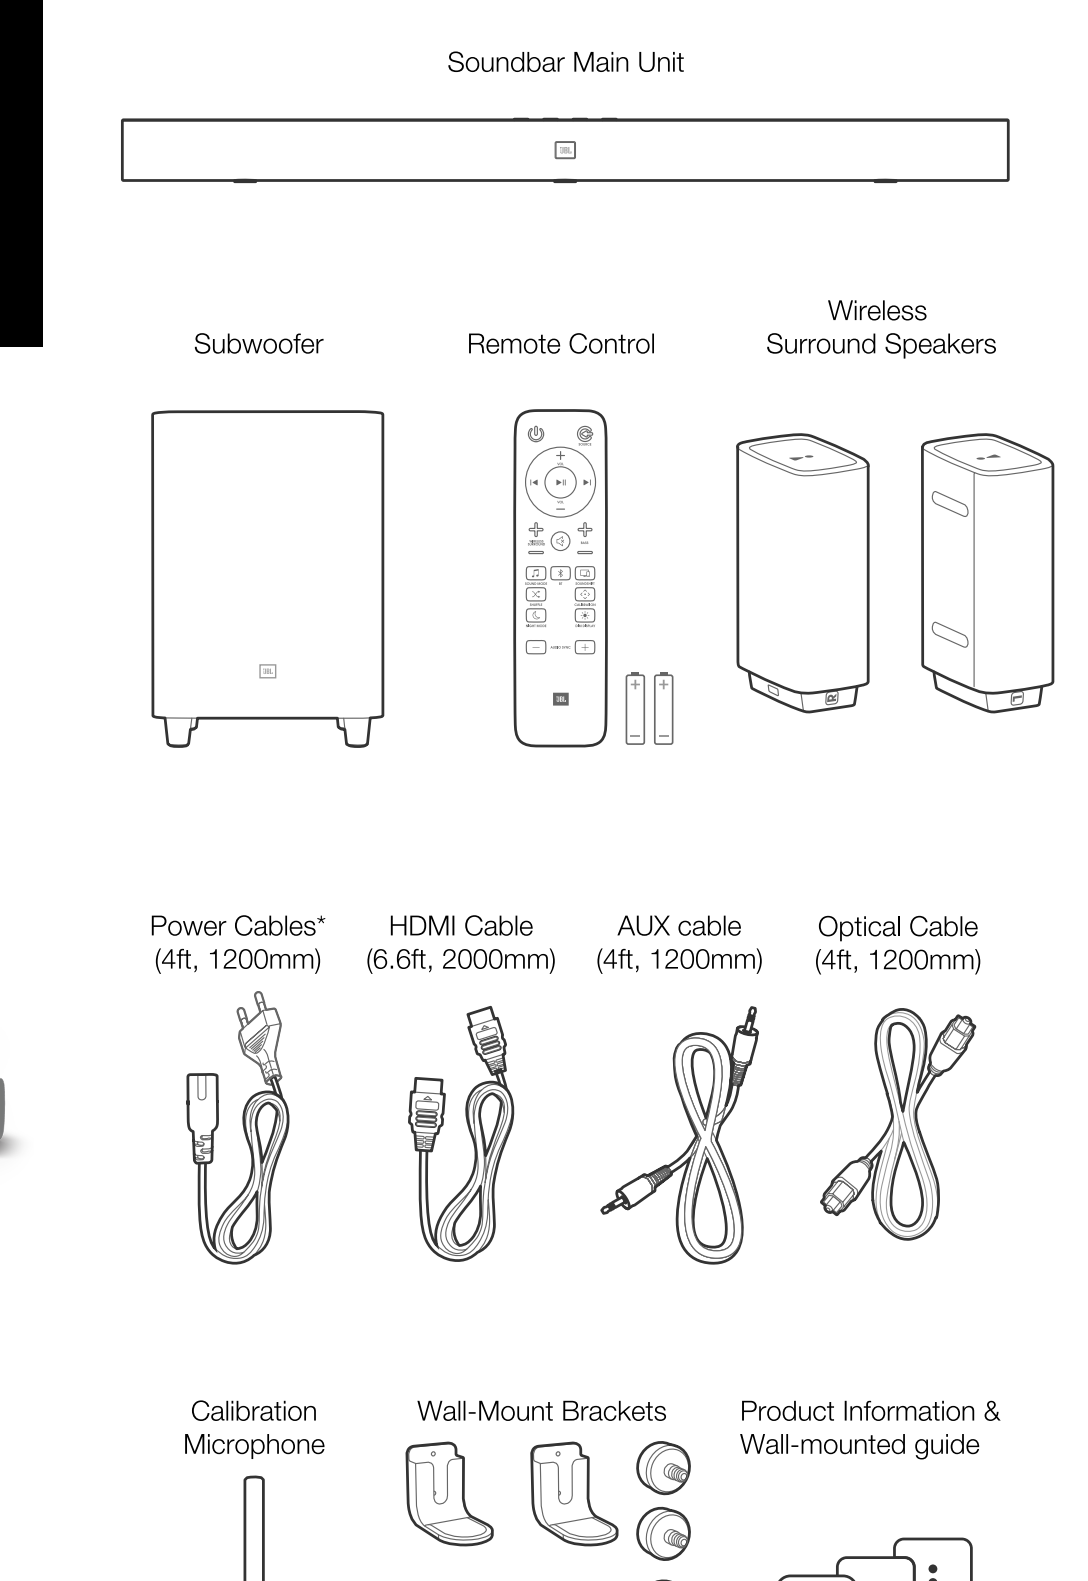

Soundbar Main Unit
Subwoofer
Remote Control
Wireless Surround Speakers
Power Cables* (4ft, 1200mm)
HDMI Cable (6.6ft, 2000mm)
AUX cable (4ft, 1200mm)
Optical Cable (4ft, 1200mm)
Calibration Microphone
Wall-Mount Brackets
Product Information & Wall-mounted guide

* Power cable numbers varied by regions

2 Place your soundbar

2a. Place the soundbar on the table

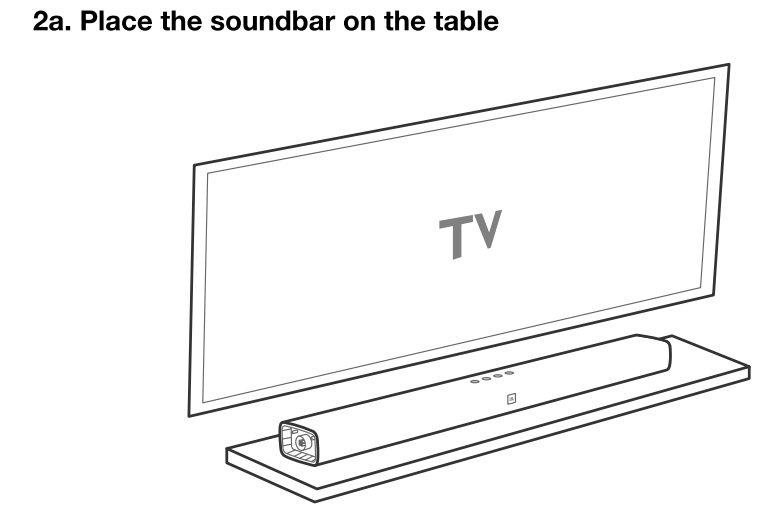

2b. Wall mount the soundbar

Use tape to stick the wall-mounted paper guide on the wall, push a pen tip through the center to mark the wall-mounted bracket location and remove the paper.

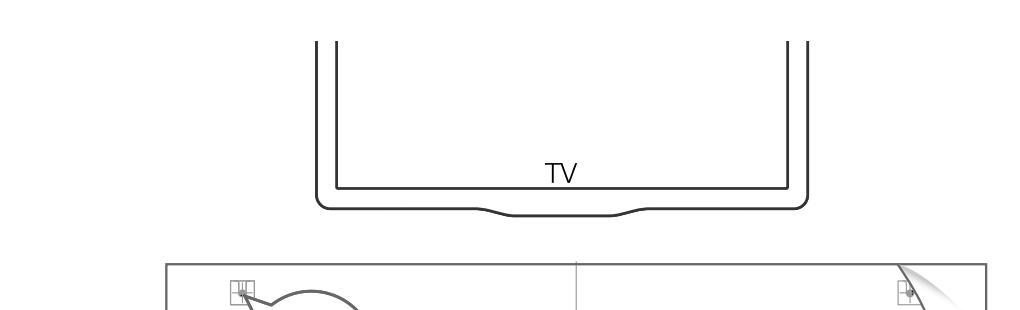

Screw the wall mount brackets on the pen mark; Fix the screw at the back of soundbar; then hook the soundbar on the wall.

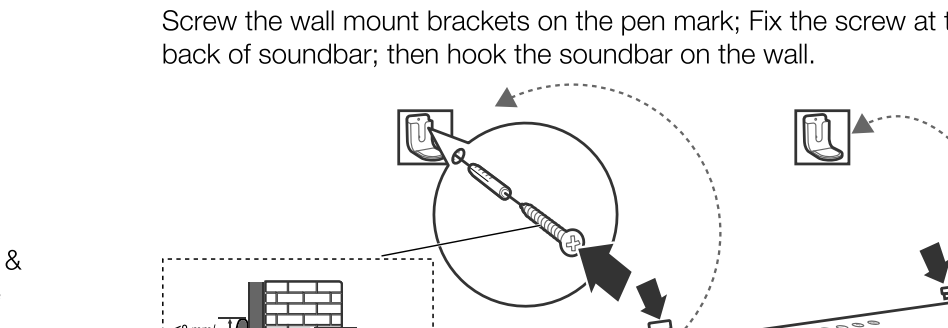

≤8 mm/ 0.31"
4mm/0.16"
≥35 mm/1.4"

2c. Dock the wireless speakers

Wireless speakers charge during soundbar standby mode.

3 Connect your soundbar

3a. Connect to your TV

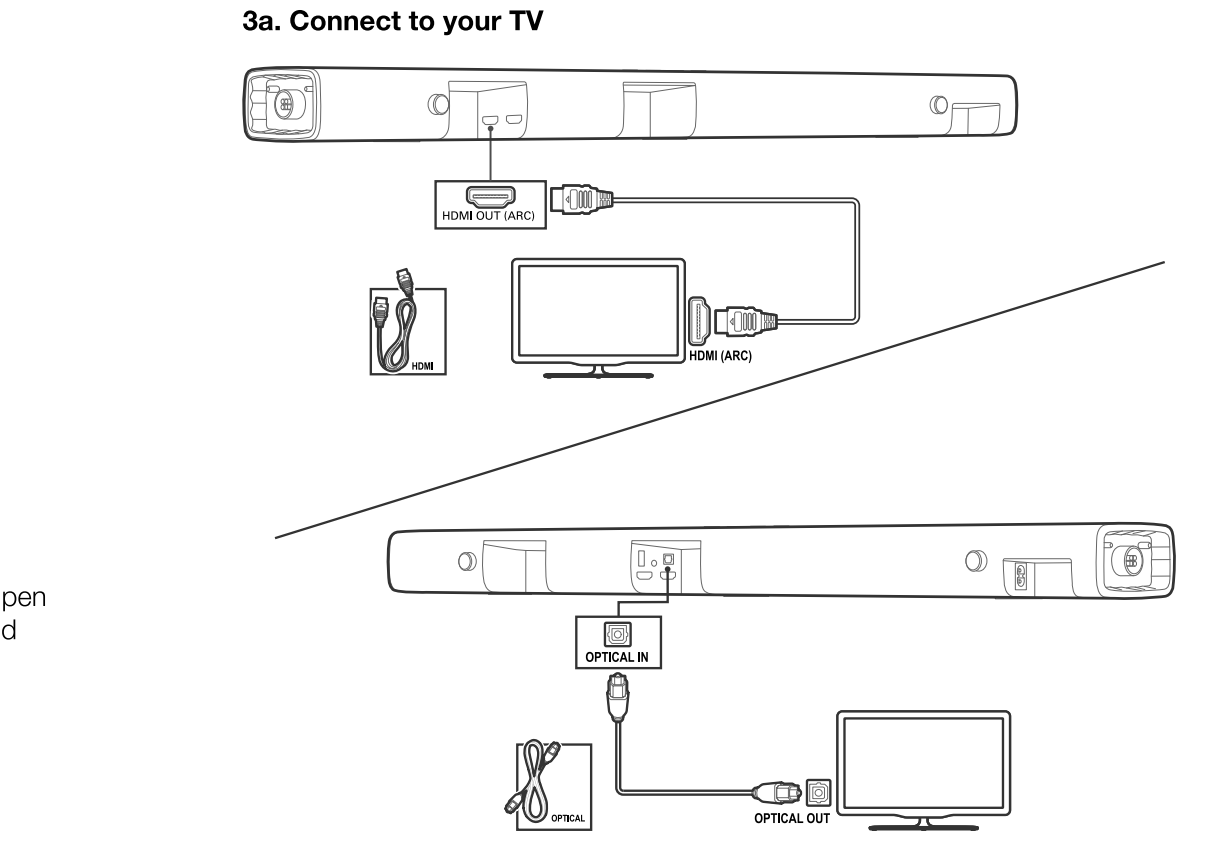

HDMI OUT (ARC)
HDMI
HDMI (ARC)
OPTICAL IN
OPTICAL
OPTICAL OUT
TV

3b. Connect to other devices

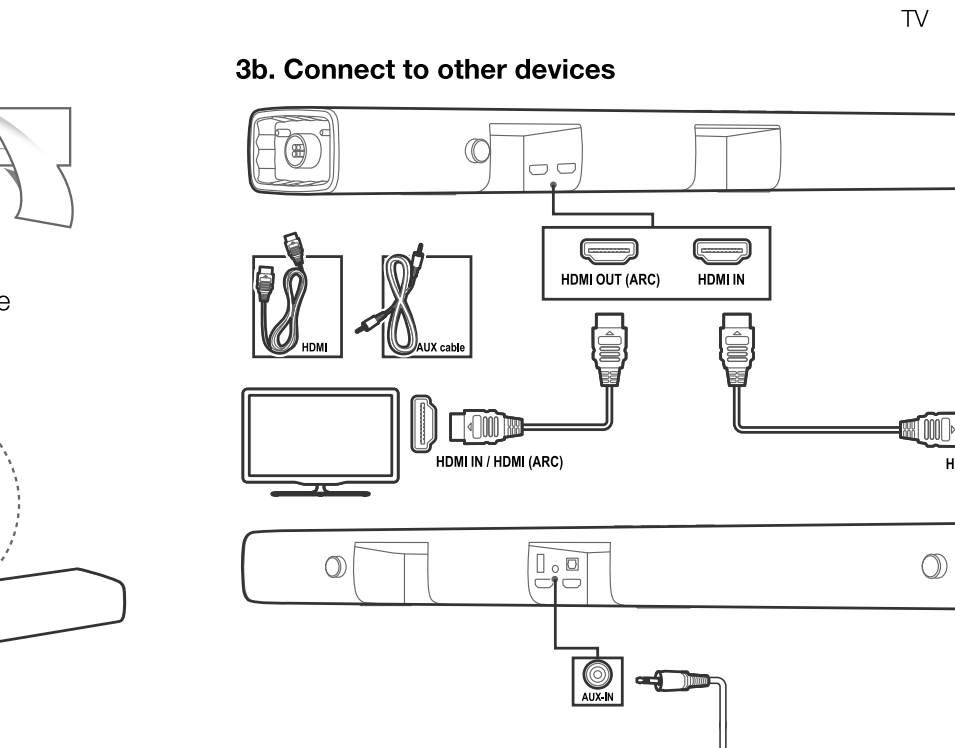

HDMI
AUX cable
HDMI OUT (ARC)
HDMI IN
HDMI IN / HDMI (ARC)
HDMI OUT
DVD
Blu-ray Disc
AUX-IN
AUX-OUT

4 Power your system

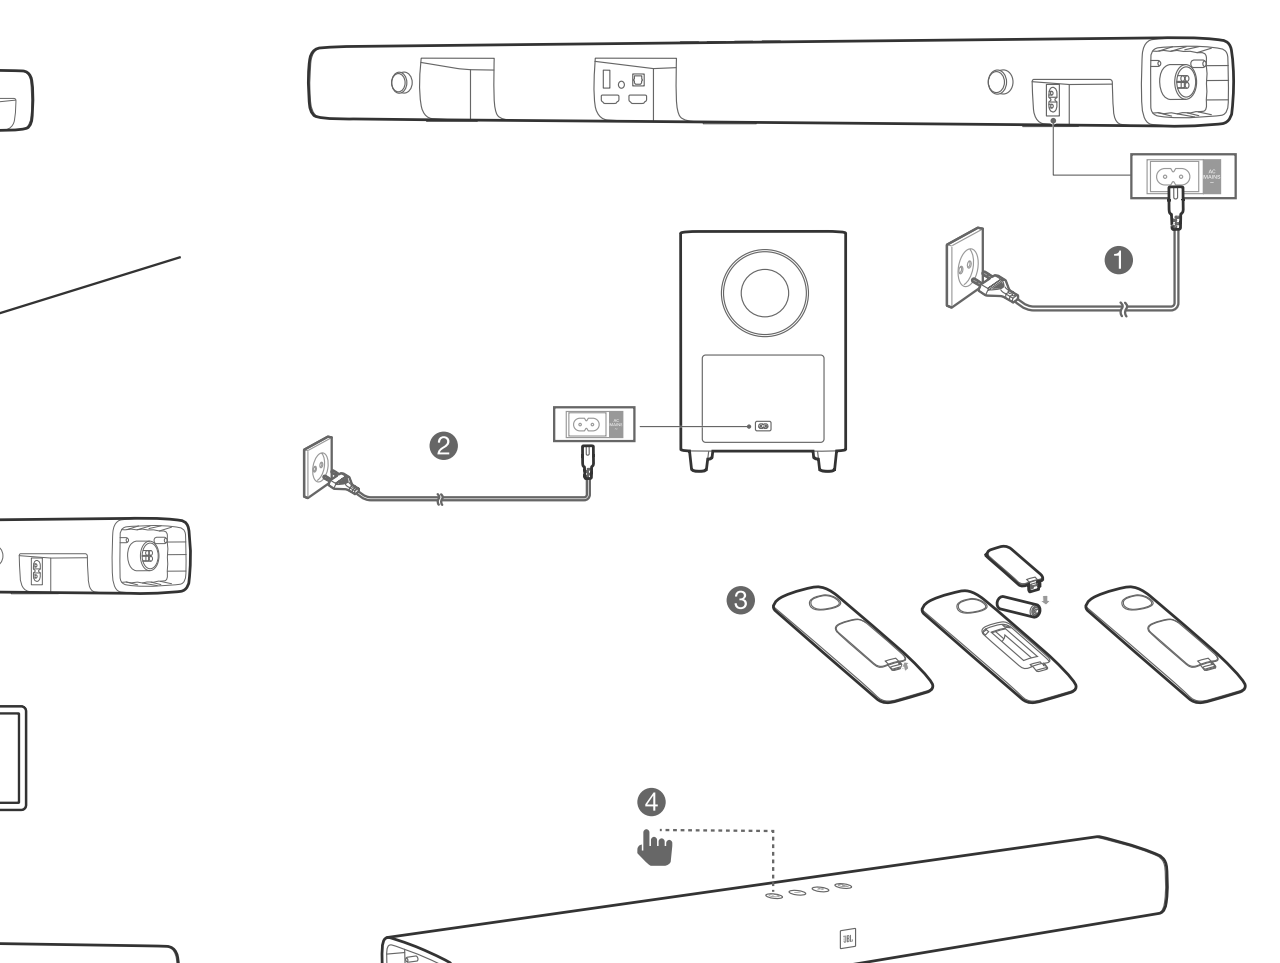

5 Control your soundbar

5a. Top Panel

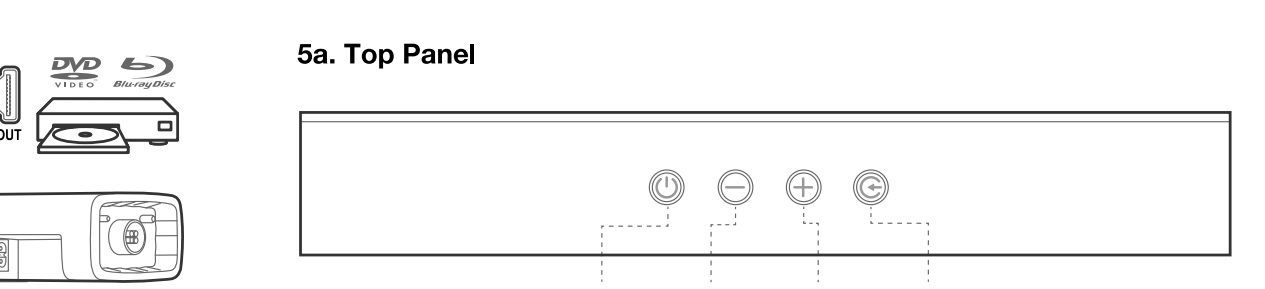

Power
Volume Down
Volume Up
Source

5b. Remote control

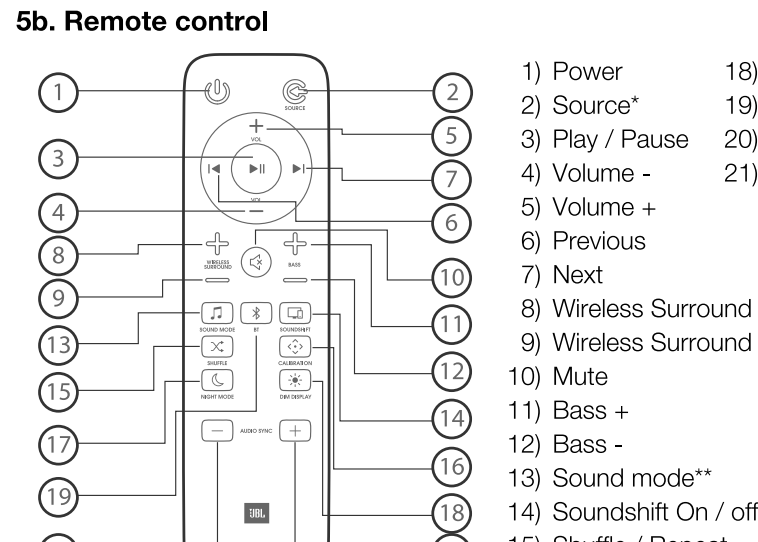

1) Power
2) Source*
3) Play / Pause
4) Volume -
5) Volume +
6) Previous
7) Next
8) Wireless Surround Level+
9) Wireless Surround Level-
10) Mute
11) Bass +
12) Bass -
13) Sound mode**
14) Soundshift On / off
15) Shuffle / Repeat
16) Calibrate Audio
17) Night mode On / off
18) Dim display
19) Bluetooth
20) Audio Sync +
21) Audio Sync -

*Switch between HDMI ARC/ HDMI 1/ HDMI 2/ HDMI 3/ Optical/ AUX/ Bluetooth/ USB
**Switch between Standard/ music/ movie/ voice/ sports sound mode or press and hold 5 seconds to reset default audio setting

5c. Wireless Speakers



Reconnect to soundbar / Power Off
Speaker charging

6 Bluetooth® connection

6a. Press Remote Control Bluetooth button to enter Bluetooth source

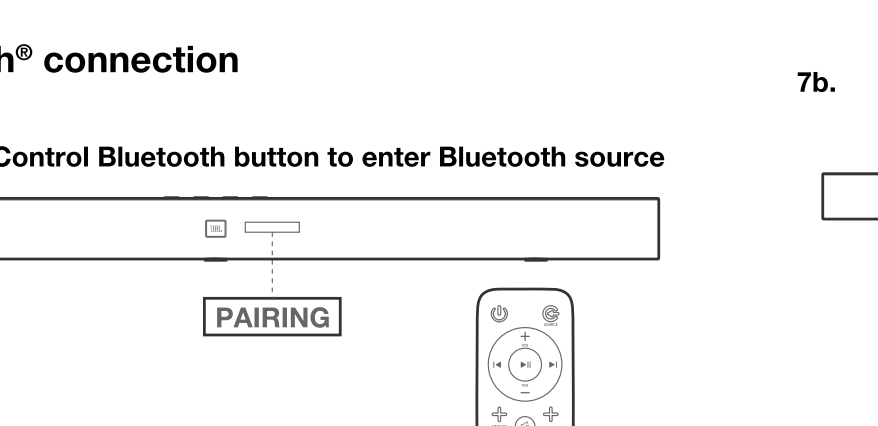

6b.

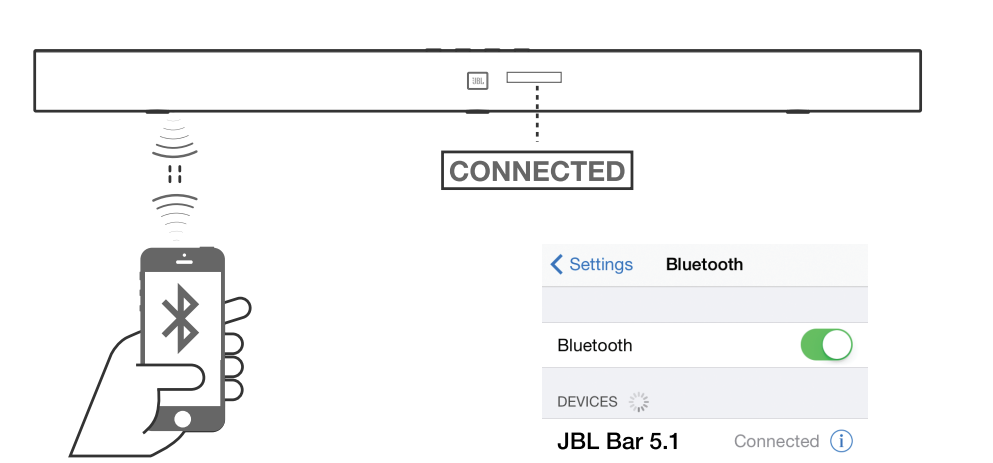

CONNECTED
Settings
Bluetooth
DEVICES
JBL Bar 5.1
Connected
Now Discoverable
Choose "JBL Bar 5.1" to connect

Remark: Press and hold Remote control Bluetooth button for 3 seconds if you want to pair another mobile device

7 Set up Wireless Surround Sound

Audio Calibration will optimize the wireless speaker sound settings for a better surround sound experience.

7a.

7b.

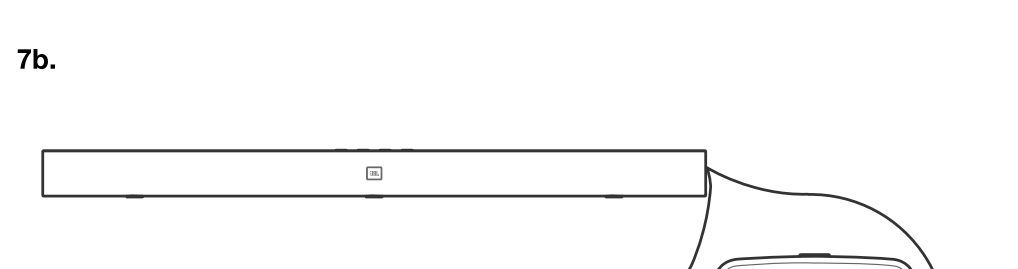

7c.

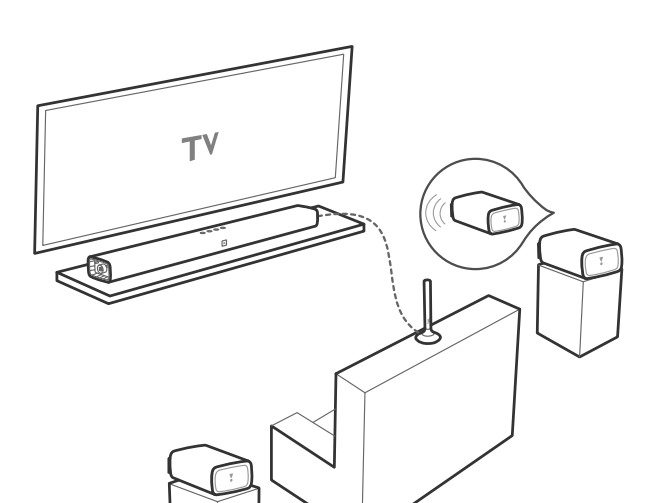

7d.

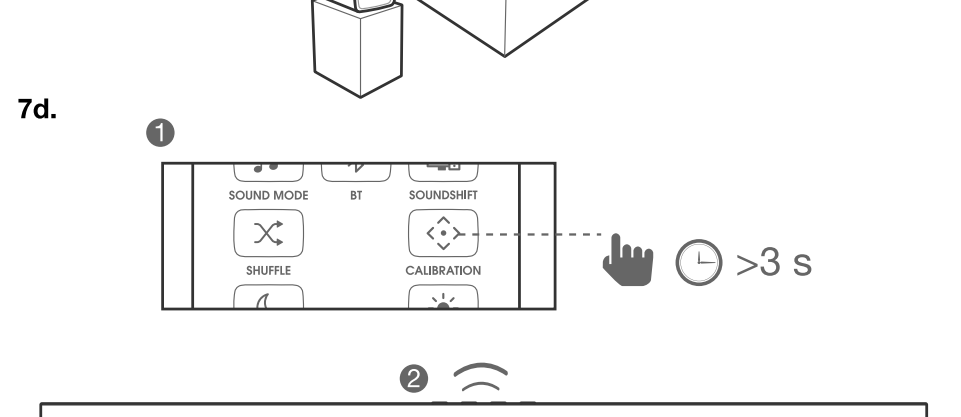

1
SOUND MODE
BT
SOUNDSHIFT
SHUFFLE
CALIBRATION
>3 s
2
DONE
3

8 JBL SoundShift®

Press Soundshift button to enable Soundshift feature.



SOUND MODE
BT
SOUNDSHIFT

While Soundshift is on, play and pause your music source to enjoy auto-switch between your mobile devices (A) and TV (B). When Soundshift is off, press the Bluetooth button on the Remote Control to listen to Bluetooth source.

(A)

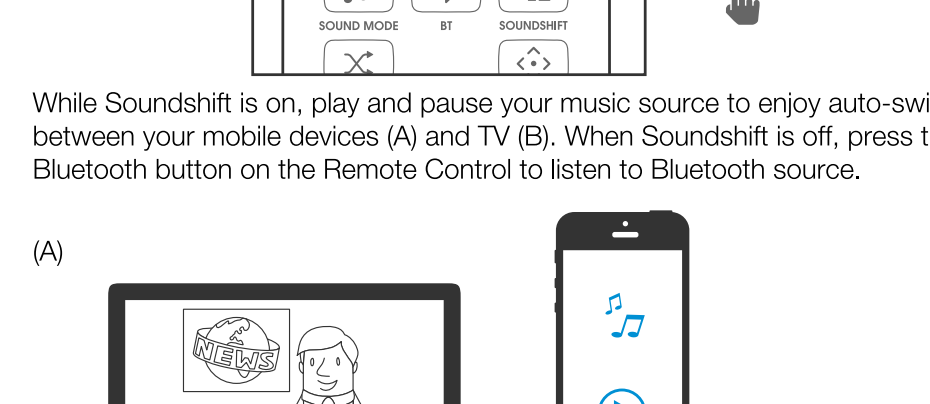

(B)

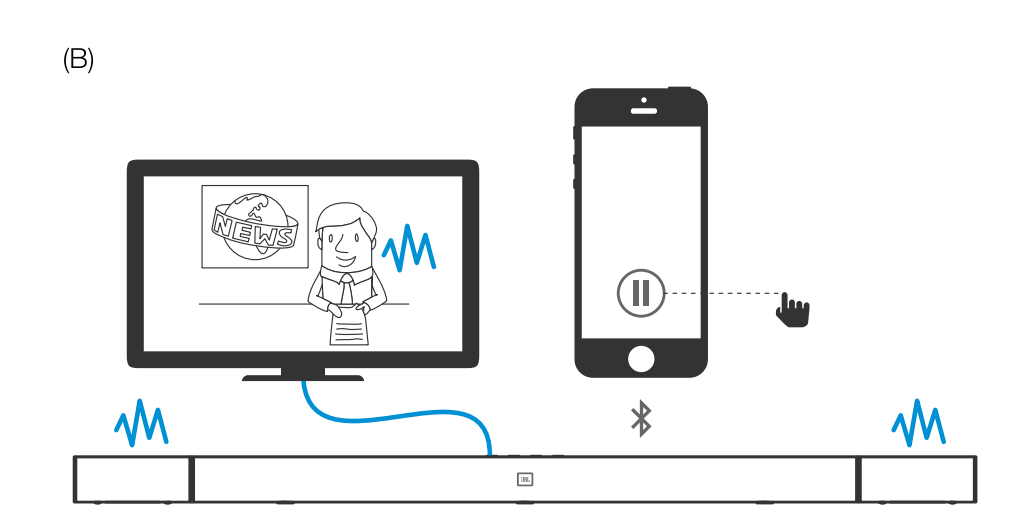

9 Respond to Your TV Remote Control

Use your own TV remote control to control your soundbar

9a. For most Samsung, LG, Sony and Vizio TVs

The soundbar responds to your TV remote control automatically.
Press and hold soundbar remote control SHUFFLE button if you want to disable this function.

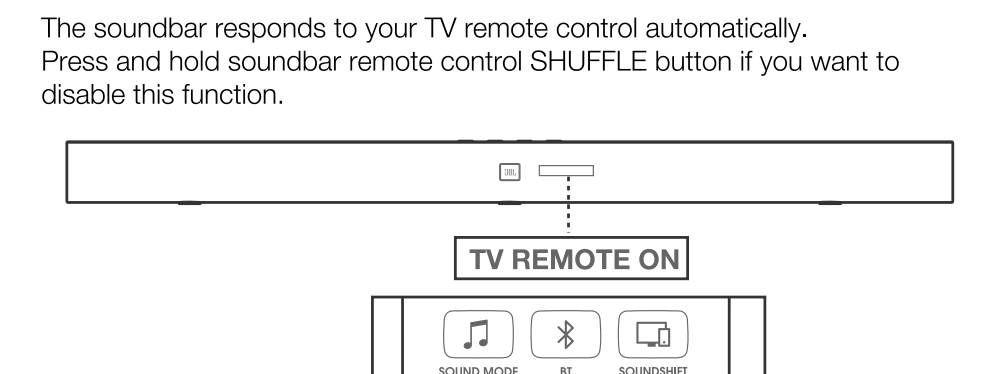

TV REMOTE ON
SOUND MODE
BT
SOUNDSHIFT
SHUFFLE
CALIBRATION
>3 s

9b. For other TVs

Please manually program the soundbar to respond to your TV remote control step by step. First, press and hold VOLUME+ and SOURCE button to enter learning mode.

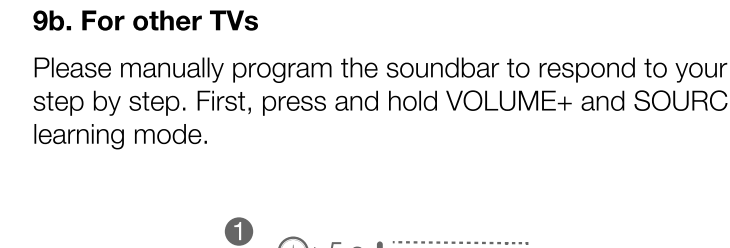

1
>5 s
LEARNING

Then, press POWER button on the soundbar and press POWER button on the TV remote control.

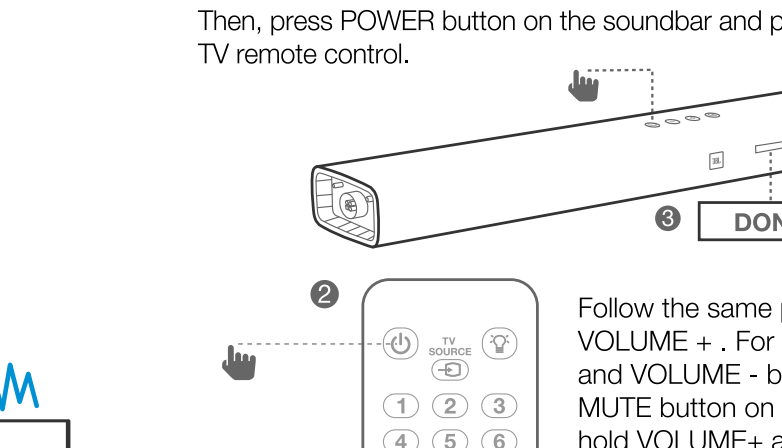

Follow the same procedure for VOLUME - and VOLUME + . For mute, press both VOLUME + and VOLUME - button on soundbar and press MUTE button on TV remote control. Press and hold VOLUME+ and SOURCE button on soundbar again and now your soundbar responds to your TV remote control.

10 Product Specifications

Total Maximun Power	510W
Soundbar Maximum Power	150W
Subwoofer Maximum Power	300W
Surround Speaker Maximum Power	2 x 30W
Surround Speaker Play Time	10 hours
Battery charge time	< 3 hours
Soundbar Transducer Size	6 x 2.25" racetrack drivers 3 x 1.25" tweeter
Subwoofer Transducer Size	10"
Max SPL	104db
Frequency Response	35Hz to 20KHz
Operating Temperature	0°C - 45°C
Audio Inputs	1 Analog, 1 Optical, Bluetooth, USB
HDMI Video Inputs	3
HDMI Video Output (with Audio Return Channel)	1
HDMI HDCP Version	2.2
Bluetooth Version	4.2
Bluetooth Profile	A2DP V1.3/ AVRCP V1.6
Bluetooth Frequency Range	2402MHz-2480MHz
Bluetooth Max Transmitting power	9dBm (EIRP)
Bluetooth Transmitter modulation	GFSK, π/4 DQPSK, 8DPSK
5.8G Wireless Frequency Range	5725MHz- 5875MHz
5.8G Max Transmitting power	9dBm (EIRP)
Soundbar Dimensions (W x H x D)	1148 x 58 x 93 (mm) \ 45" x 2.3" x 3.7"
Soundbar Weight	3.9kg \ 8.6 lbs
Subwoofer Dimensions (W x H x D)	440 x 305 x 305 (mm) \ 16" x 12" x 12"
Subwoofer Weight	13kg \ 28.7 lbs
Surround Speaker Dimensions (W x H x D)	165 x 59 x 93 (mm) \ 6.5" x 2.3" x 3.7"
Surround Speaker Weight	0.6kg \ 1.3 lbs
Packaging Dimensions (W x H x D)	1008 x 379 x 455 (mm) \ 39.7" x 14.9" x 17.9"
Packaging Weight (Gross)	20.95kg \ 46.1 lbs

CAUTION:
This equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.

There are no restrictions in use in EU.

Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primario"
Este produto está homologado pela ANATEL, de acordo com os procedimentos regulamentados pela Resolução 242/2000, e atende aos requisitos técnicos aplicados.
Para maiores informações, consulte o site da ANATEL - www.anatel.gov.br

Торговая марка: JBL
Назначение товара: Активная акустическая система
Изготовитель: Харман Интернешнл Индастриз Инкорпорейтед, США, 06901 Коннектикут, г.Стэмфорд, Атлантик Стрит 400, офис 1500
Страна происхождения: Китай
Импортер в Россию: ООО "ХАРМАН РУС СиАйЭс", Россия, 127018, г.Москва, ул. Двинцев, д.12, к 1
Гарантийный период: 1 год
Информация о сервисных центрах: www.harman.com/ru тел. +7-800-700-0467
Срок службы: 5 лет
Товар сертифицирован
Дата производства: Дата изготовления устройства определяется по двум буквенным обозначениям из второй группы символов серийного номера изделия, следующих после разделительного знака «-». Кодировка соответствует порядку букв латинского алфавита, начиная с января 2010 года: 000000-MY0000000, где «M» - месяц производства (А - январь, B - февраль, C - март и т.д.) и «Y» - год производства (A - 2010, B - 2011, C - 2012 и т.д.).

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HARMAN International Industries, Incorporated is under license. Other trademarks and trade names are those of their respective owners.

Manufactured under license from Dolby Laboratories. Dolby,Dolby Audio,Pro Logic and the double-D symbol are trademarks of Dolby Laboratories.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

For DTS patents, see http://patents.dts.com. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Digital Surround is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.

FR Guide de démarrage rapide

ES Guía de inicio rápido

PT Guia de Início Rápido

DE Kurzanleitung

IT Guida di avvio rapido

NL Snelstartgids

NO Hurtigstartveiledning

FI Pikaopas

RU Краткое руководство

SV Snabbstartsguide

DA Hurtigstartsguide

JP クイックスタートガイド

PL Przewodnik szybkiego startu

KO 빠른시작가이드

CHS 快速入门指南

CHT 快速入門指南

ID Panduan Memulai Cepat

AR دليل التشغيل السريع

TR04116_F