


Nice to Meet **You**

In the days to come,
oneisall pet feeder would help you feed your lovely
pets well. Just set it and forget it.

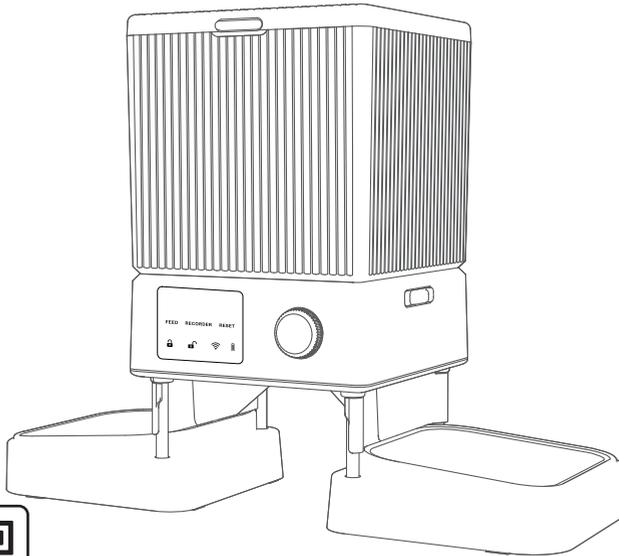


Model: PFD-002 PRO
ON-D101

LED Display Introduction

FEED: Manual feed

RECORDE: Record a message

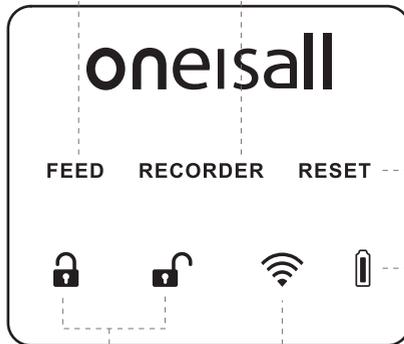

FEED

RECORDER

RESET

RESET: Clean all settings



Battery icon

Locked/Unlock

WIFI indicator

1. The feeder would lock itself if you don't operate it and wait for 30 seconds.
2. Press and hold the dial for 3 seconds to unlock the feeder.
3. The battery icon only show if you use batteries as the power supply.

Connect to APP

The feeder supports 2.4GHz and 5GHz WiFi

Note:

When powered by batteries only, the feeder can dispense food on time according to the set schedule even during a power outage, but you won't be able to use the app unless it is plugged in.



Smart Life



Scan to Download APP



System requirements

iPhone on iOS 10.0 or later. Smartphone on Android 5.0 or later.

1. Download and install the Smart Life app.

Note:

To proceed with the installation and sign-up process, please grant the necessary authorization. Upon entering your email address, you will receive a verification code. It is essential to enter this code before proceeding to set your account password.

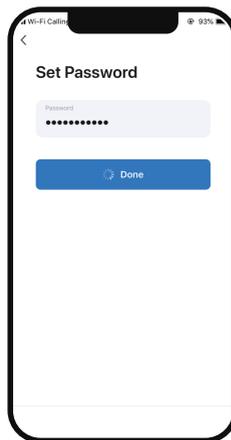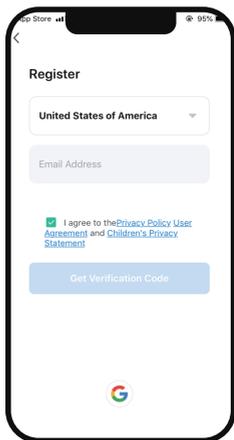

2. Turn on the Bluetooth feature on your mobile phone is turned on. Next, connect your phone to a Wi-Fi network and enable GPS location services.




3. To activate the feeder, first, turn it on. Press and hold the dial button for approximately 3 seconds to unlock it. Then, rotate the dial to the RESET icon and hold it for 5 seconds. You will notice that the WIFI icon will turn red and start flashing.



Note:


If you are using batteries as the sole power supply for the feeder, a battery icon will be displayed on the device.

4. On the app, locate the "+" symbol on the right side and click on it to add a new feeder to your account.

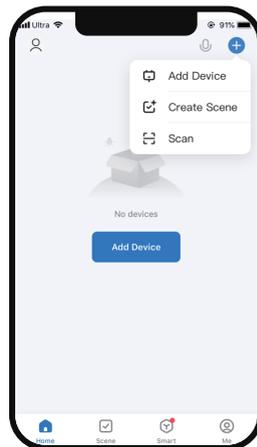


5. Within the app, utilize the "Add Device" feature to detect the device as depicted in the provided image.


The model name of the device should be PFD-002 PRO. Once the device is identified, click on the "Add" button to proceed.

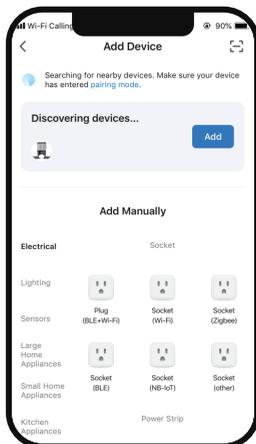

6. When connecting the feeder for the first time or switching to a new Wi-Fi network, you will be prompted to enter the Wi-Fi password. Please enter the password in the provided field and click on the "Next" button to continue.

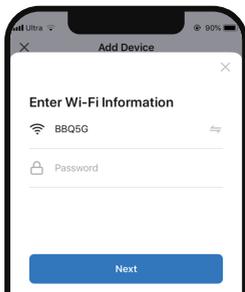

7. Please wait patiently for the connection to be established and succeed. This may take a few moments.

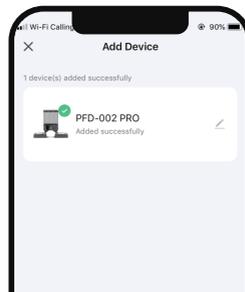

8. Once the connection is successfully established, click on the "Done" button to finalize the setup. You will notice that the WIFI icon on the device will turn white and stop blinking.




Note:


- When connecting the feeder to the power outlet, please note that the middle menu bar on the device will disappear automatically after 5 seconds of no user interaction.
- When using batteries as the sole power supply, it's important to be aware that the entire screen will turn black after 30 seconds of inactivity. To reactivate the screen, simply turn the dial as desired, and it will light up again.

Manual Feeding Setting

1. Once the connection process is completed, the mobile phone will automatically open the settings menu.

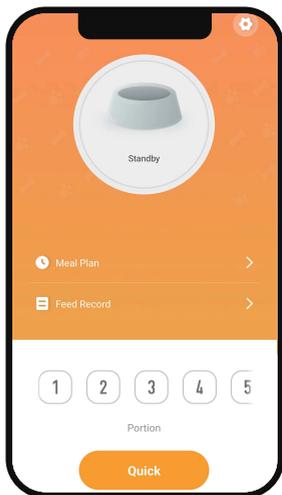


2. Choose the desired number of portions by selecting the appropriate value, and then click on the "Manual" option. In accordance with the provided image, the feeder will dispense 5 portions.

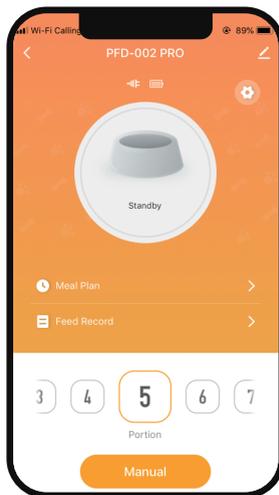


Feeding Schedule Settings


1. Click on the "Meal Plan" option to access the feeding plan setting interface. Tap on "Add" option to set feeding schedule.

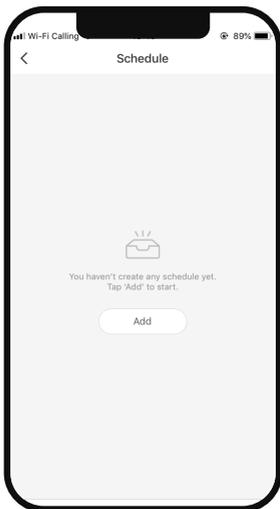

2. Select the desired number of days of the week for feeding. Then, choose the feeding time and specify the number of portions for each feeding.

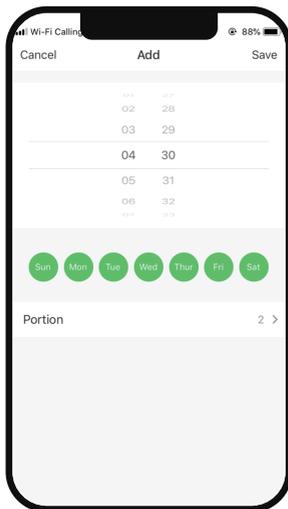


Once the settings are properly configured, you will obtain a schedule as illustrated below:

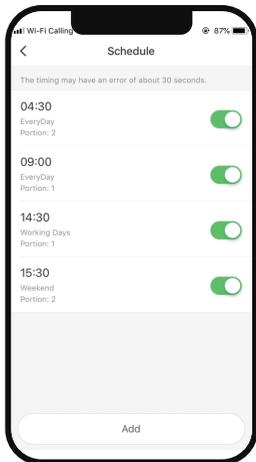

You have the flexibility to set up to 10 meals in total, with a maximum of 60 portions per meal.

Food Shortage Notification

When the food level is low, the feeder will send a food shortage reminder to your mobile device every hour until refilled. You can also disable this feature in the settings.

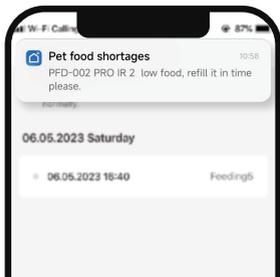

Pet food shortages

10:58

PFD-002 PRO IR 2 low food, refill it in time please.

Daily Feeding Recommendation

The amount of every portion is not adjustable. Pet owners should adjust the number of portions based on their pet's daily meals and appropriate amount per meal.

Daily Food Amount	1/16 cup	1/8 cup	1/4 cup	1/3 cup	1/2 cup	1 cup
Recommended Portions	1	2	3	4	6	12
Grams	10	20	30	40	60	120
oz	0.35	0.7	1.05	1.4	2.1	4.2
ml	10	20	30	40	60	120

We recommend feeding your pet 3-6 meals per day.

For example, DaMeng needs 1/2 cup a day. The daily amount should be 6 portions in total. We feed him 3 meals a day, the portion should be 2 per meal.

Note:

The PORTION number means the amount for each bowl.
It Does Not support to deliver different portions to each bowl.