

OUTDOOR STREAMING SOUND SYSTEM POWERED BY SONOS SONANCE MAG6.1

Overview

An elegant, weather resistant streaming music system that blends in with the natural landscape of outdoor spaces. Six satellite speakers and one in-ground subwoofer provide precision performance and even, balanced coverage, allowing for optimal music enjoyment that seemingly emanates from the surrounding landscape. The MAG6.1 system is offered exclusively at Best Buy and BestBuy.com.

Key Features

Sonance MAG6.1 Speakers

- (6X) 3 1/2" weather resistant satellites in a sealed non-corroding ABS enclosure designed to resemble landscape lighting
- (1X) 8" in-ground dual voice-coil subwoofer that is easily hidden under foliage
- (6X) ground stakes make satellite installation quick & easy

Sonos Amp

- Amp brings music streaming to your Sonance MAG6.1 outdoor speakers
- The built-in class D amplifier delivers 125W/Ch at 8 ohms
- WiFi, not Bluetooth connects to your home WiFi network with any 802.11b/g, 2.4 GHz broadcast-capable router for uninterrupted wireless streaming



(1X) SONOS AMP
Wireless Amplifier



SONANCE MAG6.1
(6X) SATELLITES & (1X) SUBWOOFER
Outdoor Speakers


SONANCE MAG6.1
Streaming Sound System Powered by Sonos
BBY SKU 6440405
TYLER SKU MAG6.1

SONANCE

Dimensions


SONOS AMP

Width: 8.54" (217mm)
Height: 2.52" (64mm)
Depth: 8.54" (217mm)




MAG6.1 SATELLITE

Length: 6.75" (184mm)
Diameter: 4.53" (115mm)



MAG6.1 SUBWOOFER

Length: 21.4" (544mm)
Diameter: 12.4" (315mm)

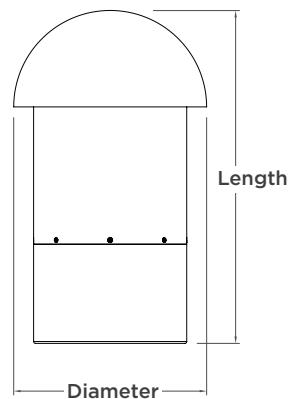

Specifications

SONOS AMP

Amplifier: Class-D
Rated Output: 125W into 8 ohms
Speaker Output Connections: Banana plugs (2X) capable of stereo or dual mono sound
Subwoofer Output: Auto-detecting RCA type, user-adjustable 50-110 Hz crossover
Line-In Sources Supported: Audio device with analog RCA output or optical output (optical adaptor required)
TV device with HDMI ARC or optical output (optical adaptor required)
Power Supply: AC 100-120/220-240 V, 50-60 Hz
Controls: Touch interface with volume up/down, previous/next track and play/pause
Ethernet Ports: Dual Ethernet ports can connect Amp to a wired home network and allow for connection of additional Sonos players
Dimensions (HxWxD): 2.52" x 8.54" x 8.54" (64 x 217 x 217mm)
Weight: 4.6 lbs. (2.1 kg) ea
Operating Temperature: 32° to 104° F (0° to 40° C)
Storage Temperature: 4° to 122° F (-20° to 50° C)
Product Finish: Black

SONANCE MAG6.1

Woofers: 8" (203mm) dual voice coil, polypropylene cone & Santoprene™ surround
Satellite: 3 1/2" (89mm) anodized aluminum cone & Santoprene™ surround
Frequency Response: 40Hz - 20kHz +/-3dB
Impedance: 5 ohms per channel nominal
Dispersion: 60° dispersion with an optimum listening area 8'-20' (2.4-6.1 meters) from the satellites
Power Handling: 50 watts minimum; 150 watts system
Sensitivity: 85dB and 89dB SPL, satellite and subwoofer respectively, 2.83V / 1 meter
Enclosure Material: Satellites and Woofer - Non-corroding, high-heat ABS enclosures
Crossover: 100Hz
Shipping Weight: 43.3 lbs (19.6kg) each
Satellite Dimensions: 6.75" L x 4.53" Dia. (184mm x 115mm)
Subwoofer Dimensions: 21.4" L x 12.4" Dia. (544mm x 315mm)
Included Accessories: Six ground stakes, 16 silicone filled wire nuts

What's In The Box

SONOS AMP

- Amp
- Sonos banana plugs (2X)
- AC Power Cord
- Warranty and regulatory booklet
- Quickstart Guide

SONANCE MAG6.1

- Satellite speakers (6X)
- Removeable speaker stakes with 1/2" NPS threading (6X)
- In-Ground Subwoofer
- MAG6.1 manual

SONANCE

©2020 Sonance. All rights reserved.

Sonos® is a registered trademark of Sonos, Inc.

Due to continuous product improvement, all features and specifications are subject to change without notice.

For the latest Sonance product specification information visit our website: www.sonance.com

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA

(949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (949) 492-7777

www.sonance.com