

QUICK SETUP GUIDE RF-G1502, 4K HDMI Splitter

PACKAGE CONTENTS

- · HDMI splitter
- · AC power adapter
- · Quick Setup Guide

You will need:

 High-speed HDMI cables, such as Rocketfish, available in multiple lengths.

Note: Using this product with 4K video will require the use of 18 Gbps bandwidth cables for best performance.

FEATURES

- Supports 3D video
- Supports up to 4K UHD
- Supports 18 Gbps bandwidth
- Compatible with most TV's, projectors and video displays with HDMI inputs.
- Gold-plated connectors for maximum signal transfer and corrosion resistance
- Supports HDMI CEC commands for remote control functionality
- Wall-mountable with integrated key-hole slots (hardware not included).


HDMI SPLITTER BASICS

This Rocketfish two-way HDMI splitter will send HDMI audio and video signals from a single source, such as a Blu-ray/DVD player or cable/satellite box, to two destinations, such as a TV and an AV receiver. It is ideal for sending the audio signal from a 4K source to an AV receiver (one that does not support 4K video pass-through), and video signal to a 4K UHD TV.

Front




Back

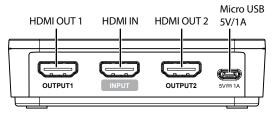


SETTING UP YOUR HDMI SPLITTER

1 Connect one end of a high-speed HDMI cable (not included) to your video source and the other end to the **INPUT** port on the HDMI splitter.

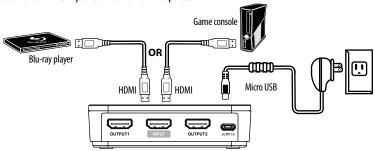

- 2 Connect one end of another high-speed HDMI cable to your HDMI splitter's **OUTPUT1** port, then connect the other end of the HDMI cable to the **IN** port of a destination component, such as an AV receiver, projector, or HDTV.
- 3 Connect one end of another high-speed HDMI cable to your HDMI splitter's **OUTPUT2** port, then connect the other end of the HDMI cable to the **IN** port of another destination component, such as an AV receiver, projector, or HDTV.
- **4** Connect the included AC adapter to the Micro USB jack on the HDMI splitter and a standard 110/120V AC outlet. The LED indicator lights white. Turn on all connected devices and operate. It is not necessary to unplug the unit. You can leave it plugged in.

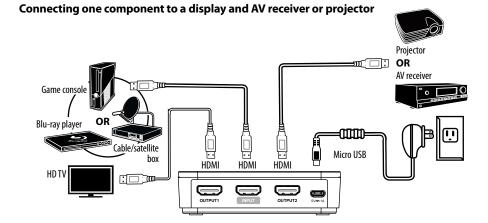

TROUBLESHOOTING

Symptom	Possible solution
LED is not on	Make sure that the HDMI splitter's power adapter is plugged in.
No video and/or audio	 Make sure that the audio and video formats of the content being used (such as Blu-ray disc) are supported by all connected devices. Make sure that your destination components (such as TV and AV receiver) are set to the HDMI inputs with which the splitter's HDMI outputs are connected. Make sure that you are using high-speed HDMI cables for all connections. Very long lengths of cables (over 20') may cause a loss of video signal. Use a shorter cable, if possible. Unplug the HDMI splitter's AC power adapter, then plug it back in again.
Video has interference	 Make sure that you are using high-speed HDMI cables for all connections. Make sure that the TV's video resolution supports the video source's output resolution.
Device powers on/off or switches input unexpectedly	This device passes CEC* commands sent by your components. If you don't want it to do this, it can be disabled in the devices' menu. See the user guide or contact the manufacturer for more information.

*CEC (Consumer Electronics Control) is a feature of HDMI designed to allow users to command and control multiple devices connected via HDMI using a single remote control. CEC also lets individual CEC-enabled devices command and control each other without user input.

SPECIFICATIONS

HDMI version	2.0b
Video amplifier bandwidth	18 Gbps
Resolutions supported	480i to 2160p (4K UHD) / 60Hz from source device
HDMI HDCP	Compliant with HDCP 2.2
Power	5 VDC / 1000 mA (5 W max) Micro USB
Dimensions	3.94 × 3.41 × 1.06 in. (100 × 87 × 27 mm)

ONE-YEAR LIMITED WARRANTY

Visit www.rocketfishproducts.com for details.

CONTACT ROCKETFISH:

For customer service call 1-800-620-2790 <u>www.rocketfishproducts.com</u>

ROCKETFISH is a trademark of Best Buy and its affiliated companies Distributed by Best Buy Purchasing, LLC 7601 Penn Ave South, Richfield, MN 55423 U.S.A. ©2016 Best Buy. All rights reserved. **Made in China**