



RAZER AETHER MONITOR LIGHT BAR

MASTER GUIDE

Make your gamer room truly shine with Razer Aether Lights. Powered by Razer Chroma™ RGB, customize and control them all from one convenient app to create the perfect setting for any scenario.

CONTENTS

1. WHAT'S INSIDE 3

2. WHAT'S NEEDED 4

3. LET'S GET YOU COVERED 4

4. TECHNICAL SPECIFICATIONS..... 5

5. SETTING IT UP..... 6

6. CUSTOMIZING THE LIGHTING 7

7. USING THE LIGHT BAR 10


8. CONFIGURING YOUR RAZER AETHER MONITOR LIGHT BAR VIA RAZER SYNAPSE 13

9. SAFETY AND MAINTENANCE24

10. LEGALESE.....25

1. WHAT'S INSIDE

- Razer Aether Monitor Light Bar

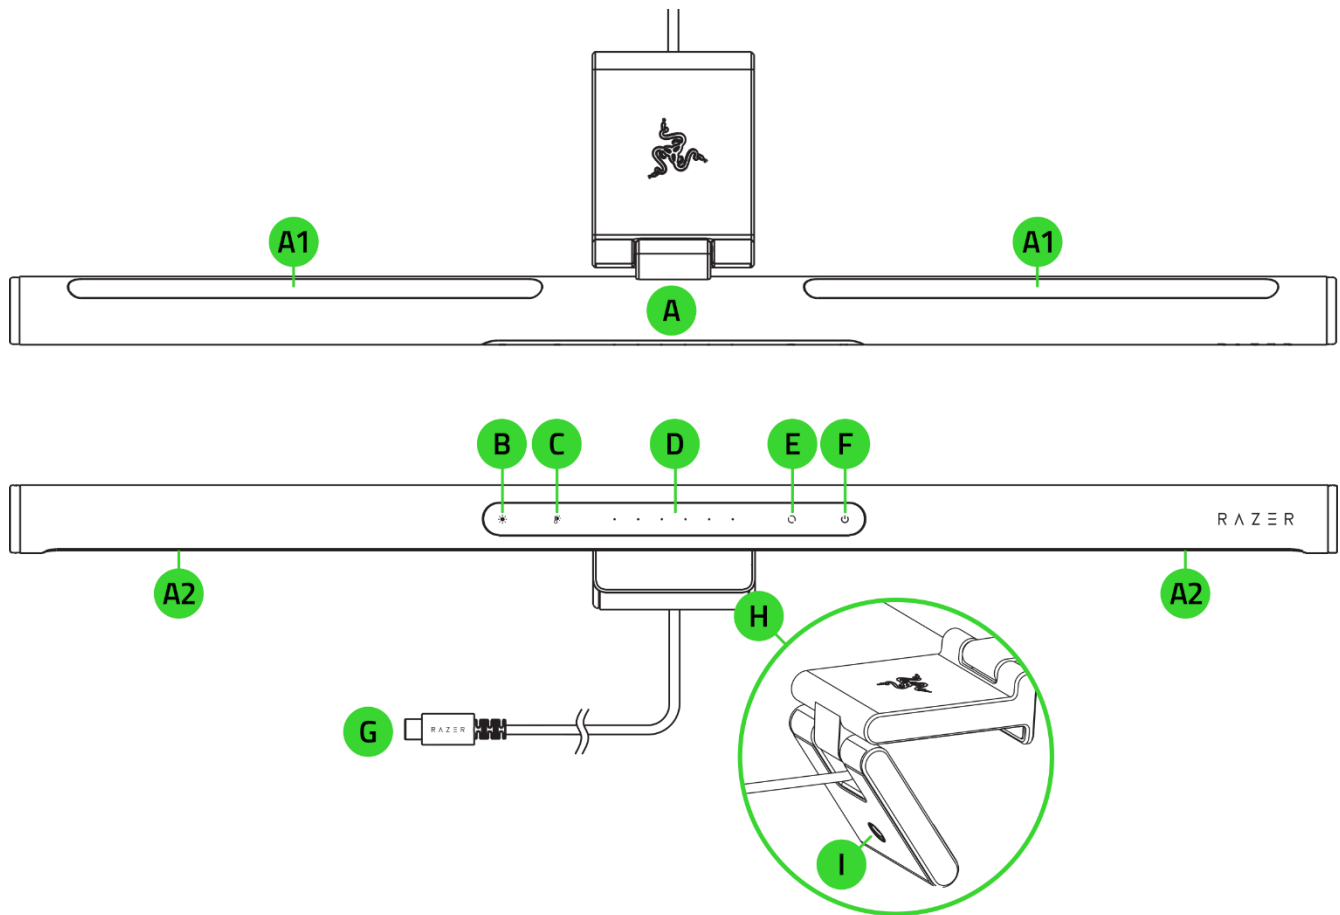

- A. Angle-adjustable dual lighting
 - A1. Backlight powered by Razer Chroma™ RGB
 - A2. Ultra-wide white lighting
- B. White light brightness button
- C. White light temperature button
- D. Setting adjustment slider
- E. RGB button
- F. Power button
- G. USB Type C connector
- H. Adjustable monitor clip
- I. Light bar thread mount

- Important Product Information Guide

2. WHAT'S NEEDED

PRODUCT REQUIREMENTS

- USB Type C port
- 2.4 GHz WiFi network (WPA / WPA2 encryption)
- WiFi-enabled PC / Laptop (Windows® 10 64-bit or higher)*

RAZER GAMER ROOM APP REQUIREMENTS

- iOS 16.4 / Android 9 (or higher) device with Bluetooth connectivity*
- Internet connection for app installation

RAZER SYNAPSE REQUIREMENTS

- Windows® 10 64-bit (or higher)
- Internet connection for software installation


**Bluetooth connectivity required for initial setup only.*

3. LET'S GET YOU COVERED



Register your product and score exclusive benefits

razerid.razer.com/warranty




*Your product's
serial number can
be found here.*

4. TECHNICAL SPECIFICATIONS

- Monitor Compatibility: 5 mm – 45 mm
- Luminous Flux: 320 lumen
- White color temperature: 2700 – 6500K
- Illuminance: 900 Lux
- Lighting Coverage (>500 Lux): 60 x 30 cm
- RGB Lighting: Razer Chroma™ RGB
- LED lifetime: 25000 hours
- CRI: 95
- Rated Power: 10W
- Power Input: 5V 2A
- Connection Protocol: 802.11b/g/n 2.4 GHz
- Voice Assistant: Amazon Alexa, Google Assistant
- Works with Matter™
- Controls: Capacitive touch buttons and slider


5. SETTING IT UP

1.

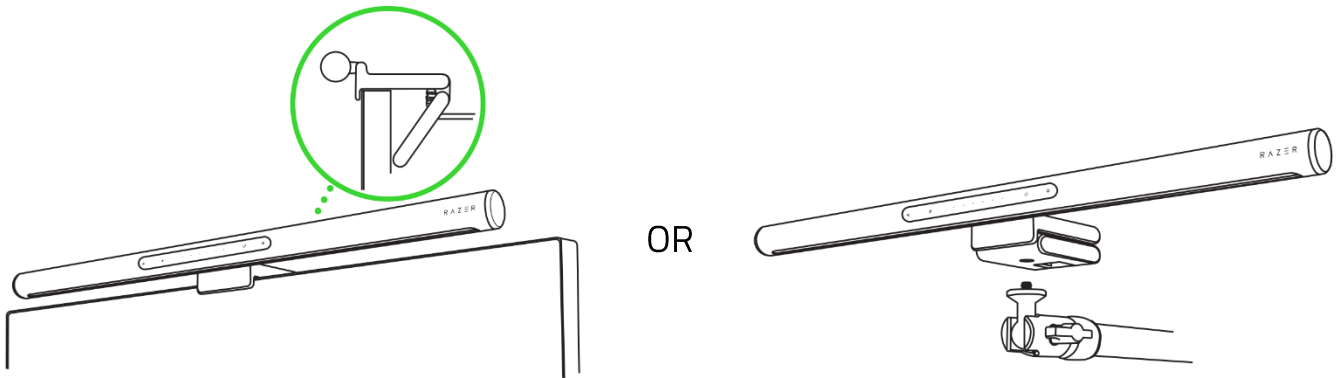


i The recommended screen-frame thickness is 0.5 to 4.5 cm / 0.2 to 1.8 in. The light bar is compatible with various monitor sizes and curvature types.

2.

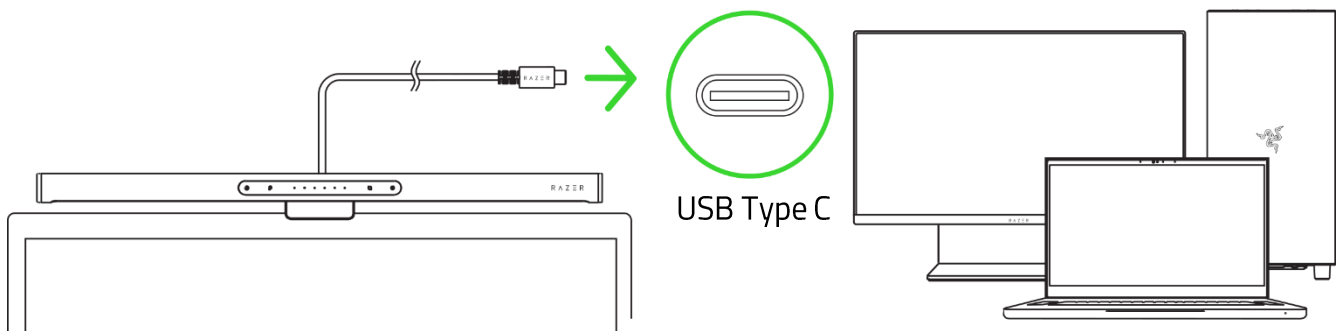

i For optimal performance, make sure to connect the light bar to the USB Type C port of your PC directly. Alternatively, the light bar is compatible with a 5V USB Type C power source with a minimum current rating of 3A and above.

3.

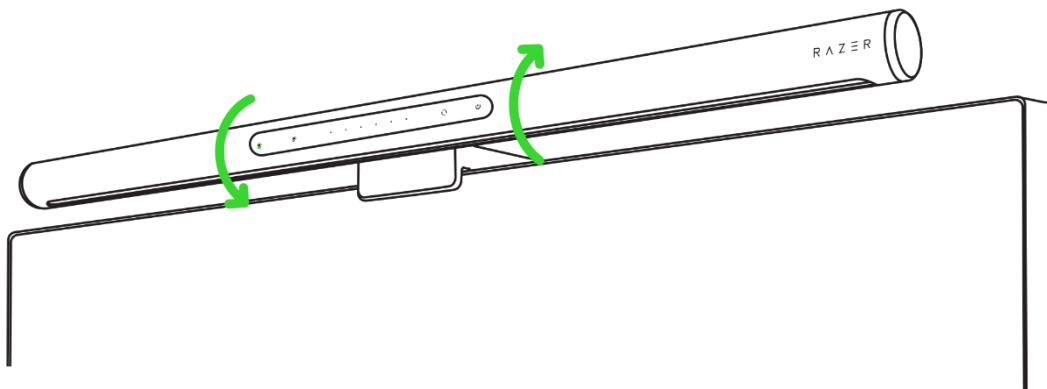


6. CUSTOMIZING THE LIGHTING

A. VIA MOBILE DEVICE USING THE RAZER GAMER ROOM APP (REQUIRED)

1.



2.

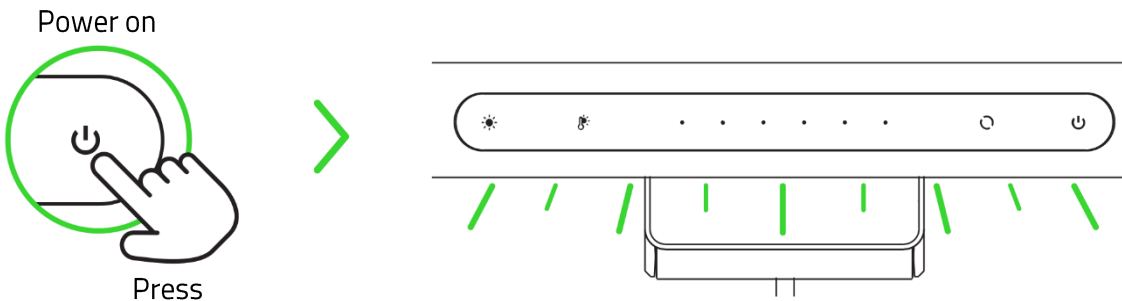

3.




Launch the app, follow the onscreen instructions and scan the Matter QR code on the light bar. Please make sure that your mobile device is on your preferred 2.4 GHz network.

You can now customize the Razer Aether Monitor Light Bar using the Razer Gamer Room app.

B. VIA PC / LAPTOP USING THE RAZER SYNAPSE APP


- i** Before proceeding, make sure the light bar is already set up on your network (via the Razer Gamer Room app) and your PC is on the same network.

1.

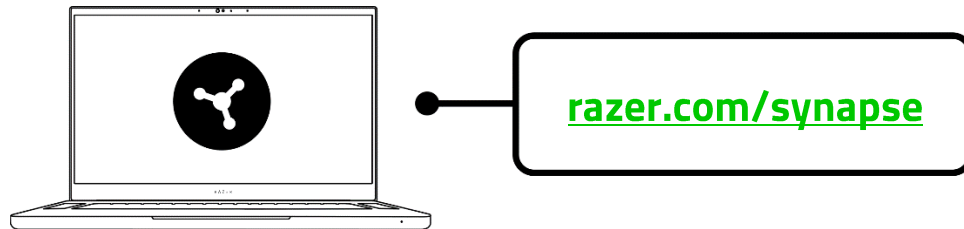


- !** Update Razer Synapse to its latest version or download its installer from razer.com/synapse. Registering for a Razer ID account is recommended but optional. You may continue as a guest; however, you won't be able to store any of your settings on the cloud.

2.

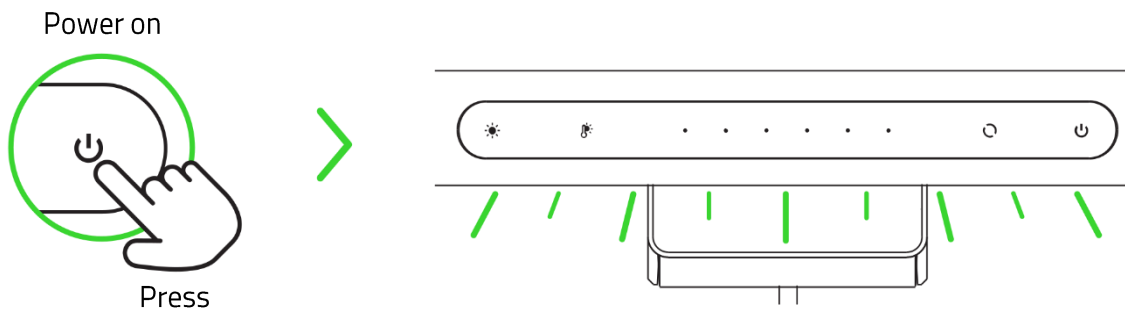

3.

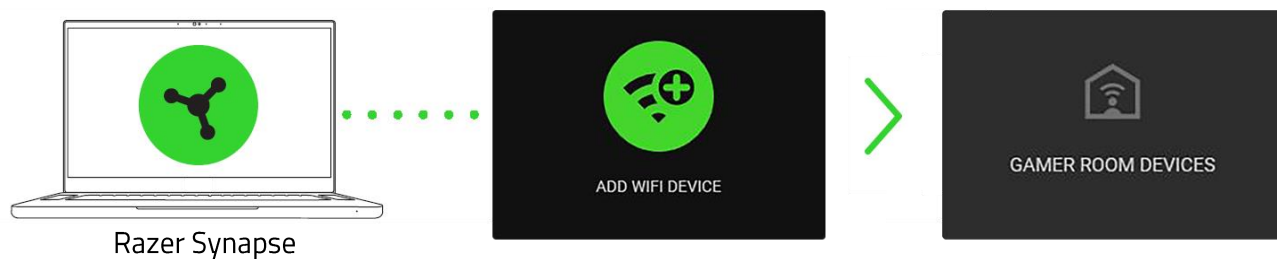

- i** Update Razer Synapse when prompted, and wait for Razer Synapse to set up the light bar.

You can now customize the Razer Aether Monitor Light Bar using Razer Synapse.


UNDERSTANDING PAIRING MODE

Pairing mode is required when setting up the light bar from the Razer Gamer Room app. It activates when you power on the light bar and deactivates after 5 minutes if the light bar remains unpaired. To reactivate pairing mode, power off and on the light bar.

7. USING THE LIGHT BAR

POWER ON/OFF

Power on / off

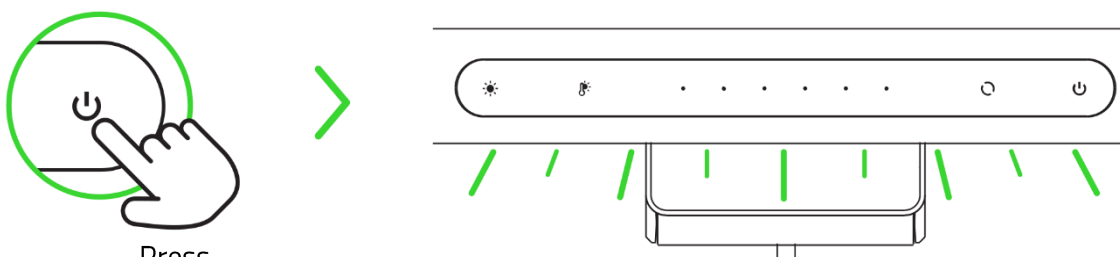


Press

PERSONALIZING THE LIGHTING

Enabling / disabling lightings


To disable or enable the white light:

Disable white light



Press and hold


Enable white light



Press


To disable or enable the backlight:

Disable backlight



Press and hold

Enable backlight




Press



When both lights are disabled, the light bar is considered 'powered off.' Simply press the power button to power it on, and the light bar will use the last disabled lighting.

Adjusting the white light temperature

Enable temperature adjustment




Adjust slider




Customizing the backlight effect

Enable backlight



Cycle between backlight effects




WHITE > RED > ORANGE > YELLOW > RAZER GREEN > BLUE > INDIGO > PURPLE > SPECTRUM CYCLING > WAVE (LEFT) > WAVE (RIGHT) > WAVE (DIVERGING) > WAVE (CONVERGING)

***Repeat until the desired lighting effect is active.*

Adjusting the brightness of each lighting

To adjust the backlight brightness:


Enable backlight



Adjust slider




To adjust the white light brightness:

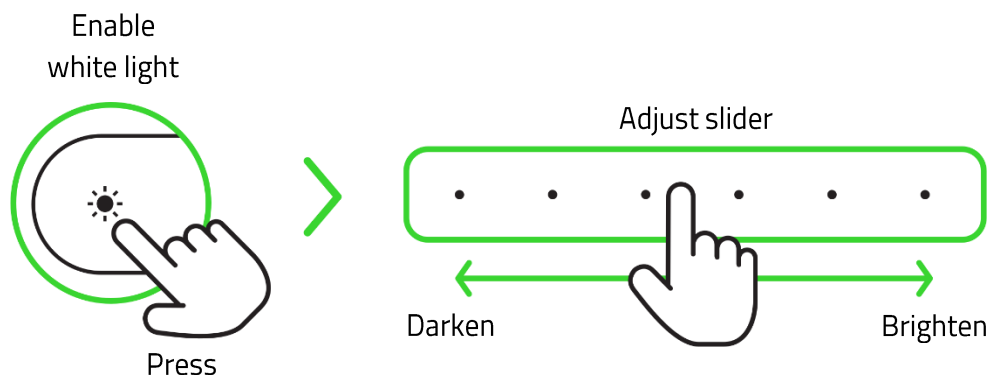

RESETTING TO FACTORY SETTINGS

Once connected, a reset is required to connect the light bar to a new device.

1. While powered on, press and hold the White light brightness and Power buttons simultaneously for 4 seconds.

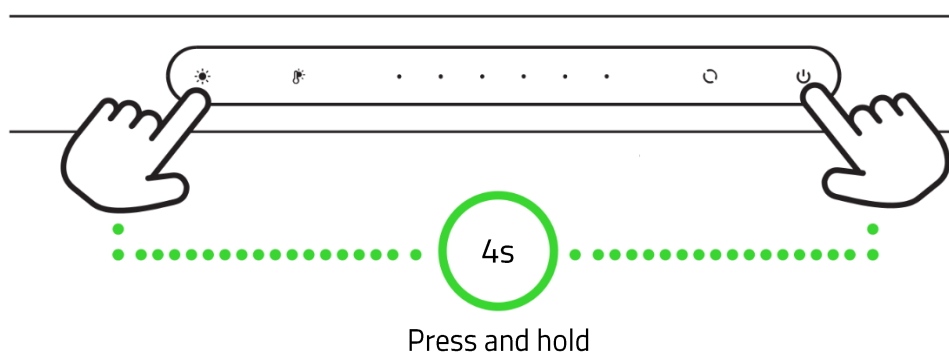

2. Wait for the backlight to briefly shift between colors before displaying a wave (diverging) effect. This indicates that the light bar has been reset and is now in pairing mode.

8. CONFIGURING YOUR RAZER AETHER MONITOR LIGHT BAR VIA RAZER SYNAPSE


i *Internet connection is required for installation, updates, and cloud-based features. Registering for a Razer ID account is recommended but optional. All listed features are subject to change based on the current software version, the connected device(s), and supported apps and software.*

SYNAPSE TAB


The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, hardware recommendations, modules, and online services.

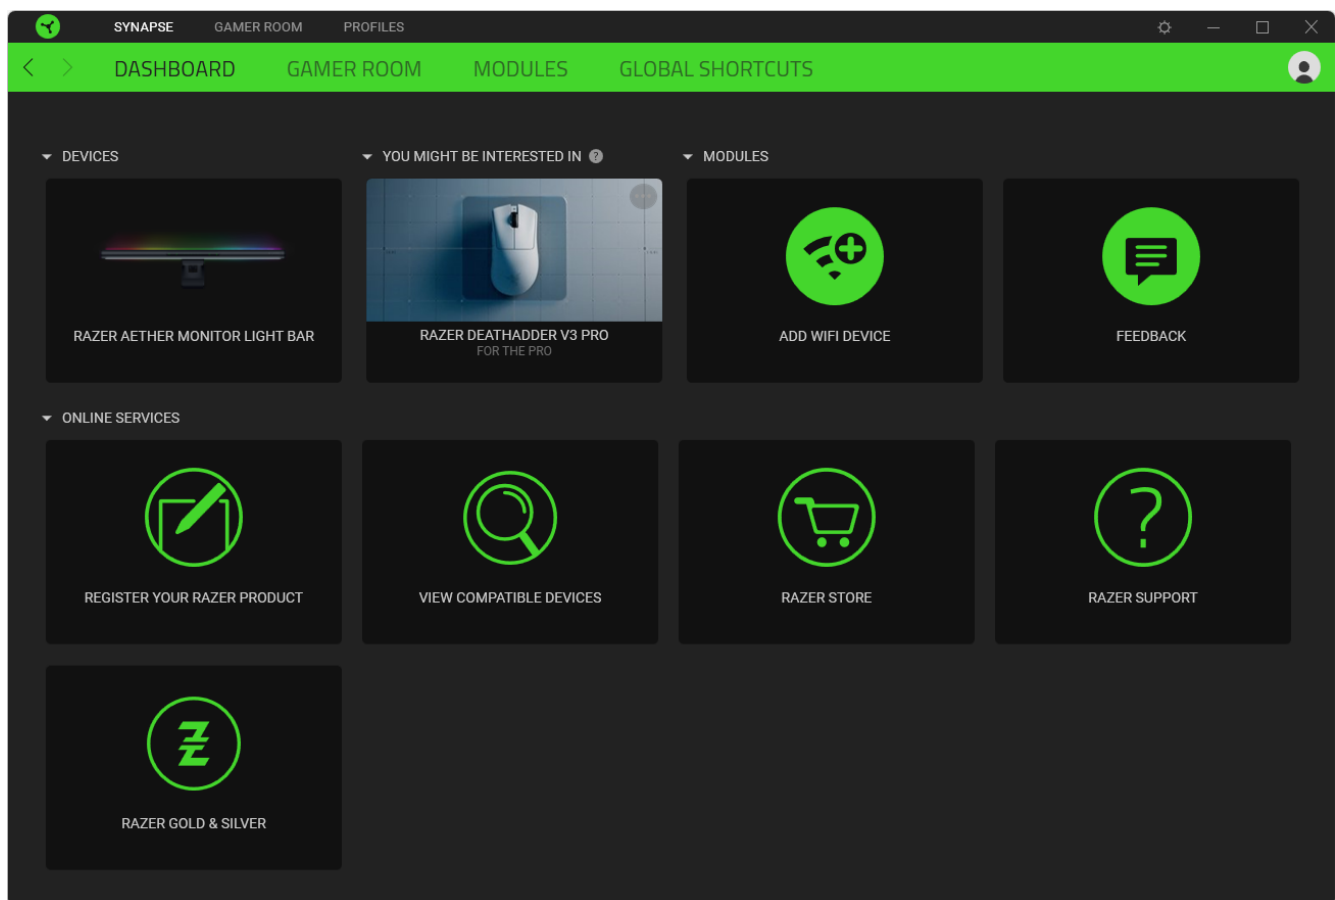


Gamer Room

Use the Gamer Room subtab to manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app. You can power on or off any Razer Gamer Room device using the Power on/off button () or switch app control by clicking on any device and toggling Synapse Override.

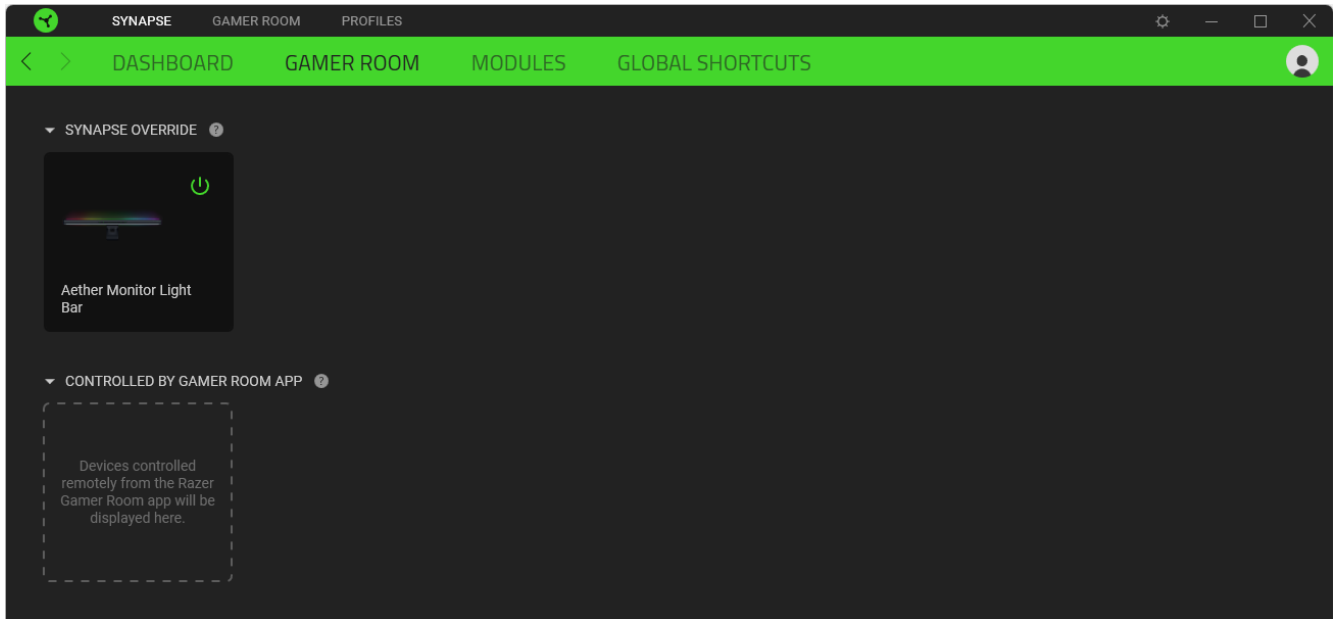

Modules


The Modules subtab displays all installed and available modules for installation.

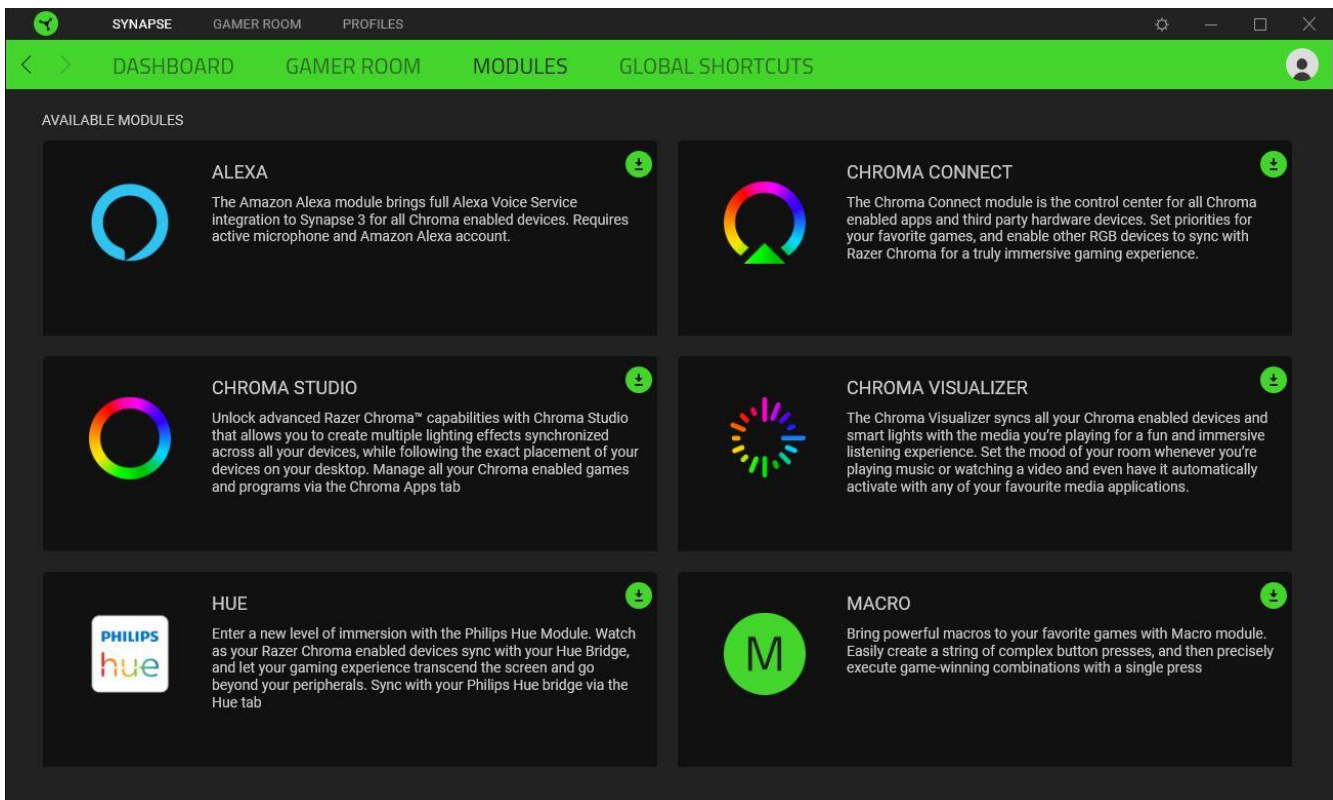

Global Shortcuts

Bind operations or Razer Synapse functions to custom key combinations from Razer Synapse-enabled device inputs that apply across all device profiles. [Learn more about Profiles](#)

 *Only Razer Synapse-enabled device inputs will be recognized.*

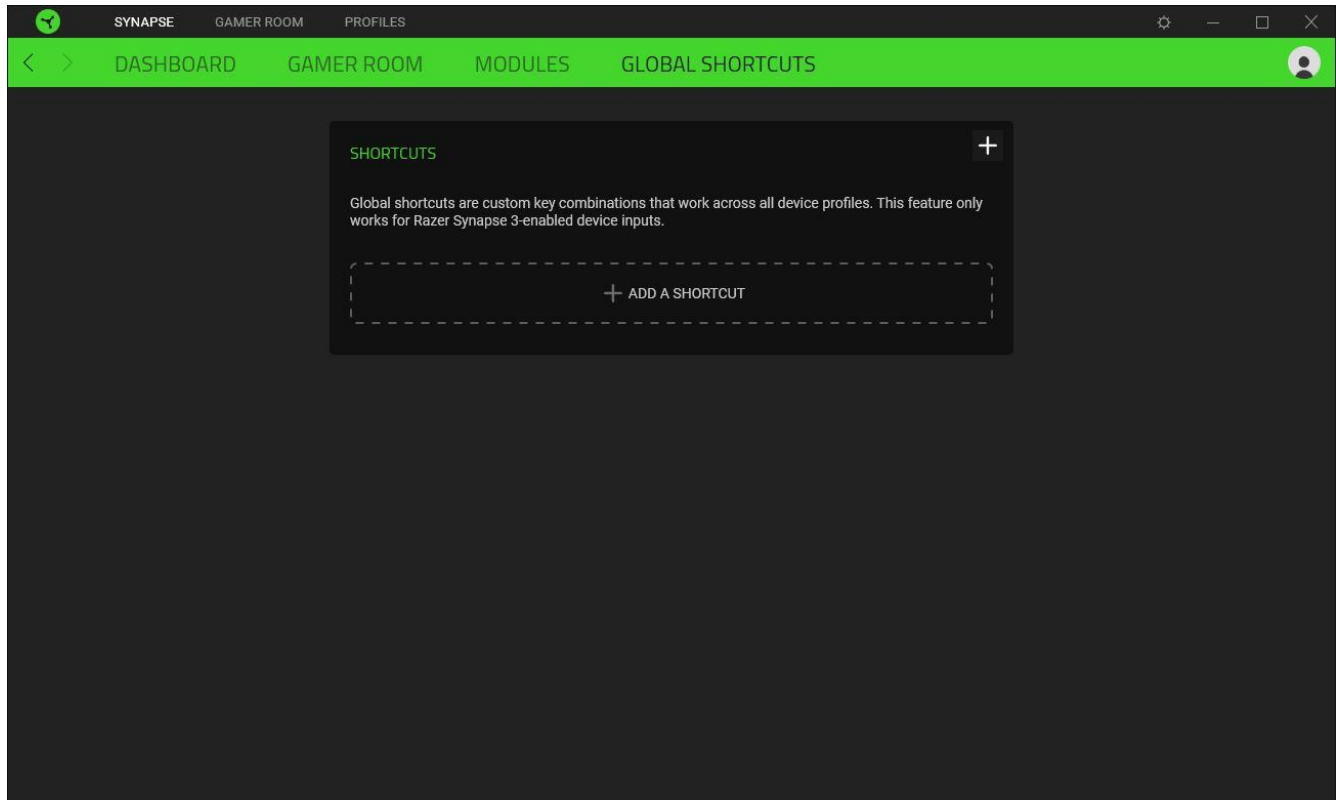


GAMER ROOM TAB

The Gamer Room tab is the main tab for your Razer Aether Monitor Light Bar. From here, you can customize your device's settings to unleash its full potential. Changes under this tab are automatically saved to your system and cloud storage.

Lighting

The Lighting subtab allows you to customize your device's Chroma lighting effect and other power-saving options, adjust the white light and Chroma brightness, and manage how Razer Synapse will take control of your device's lighting.

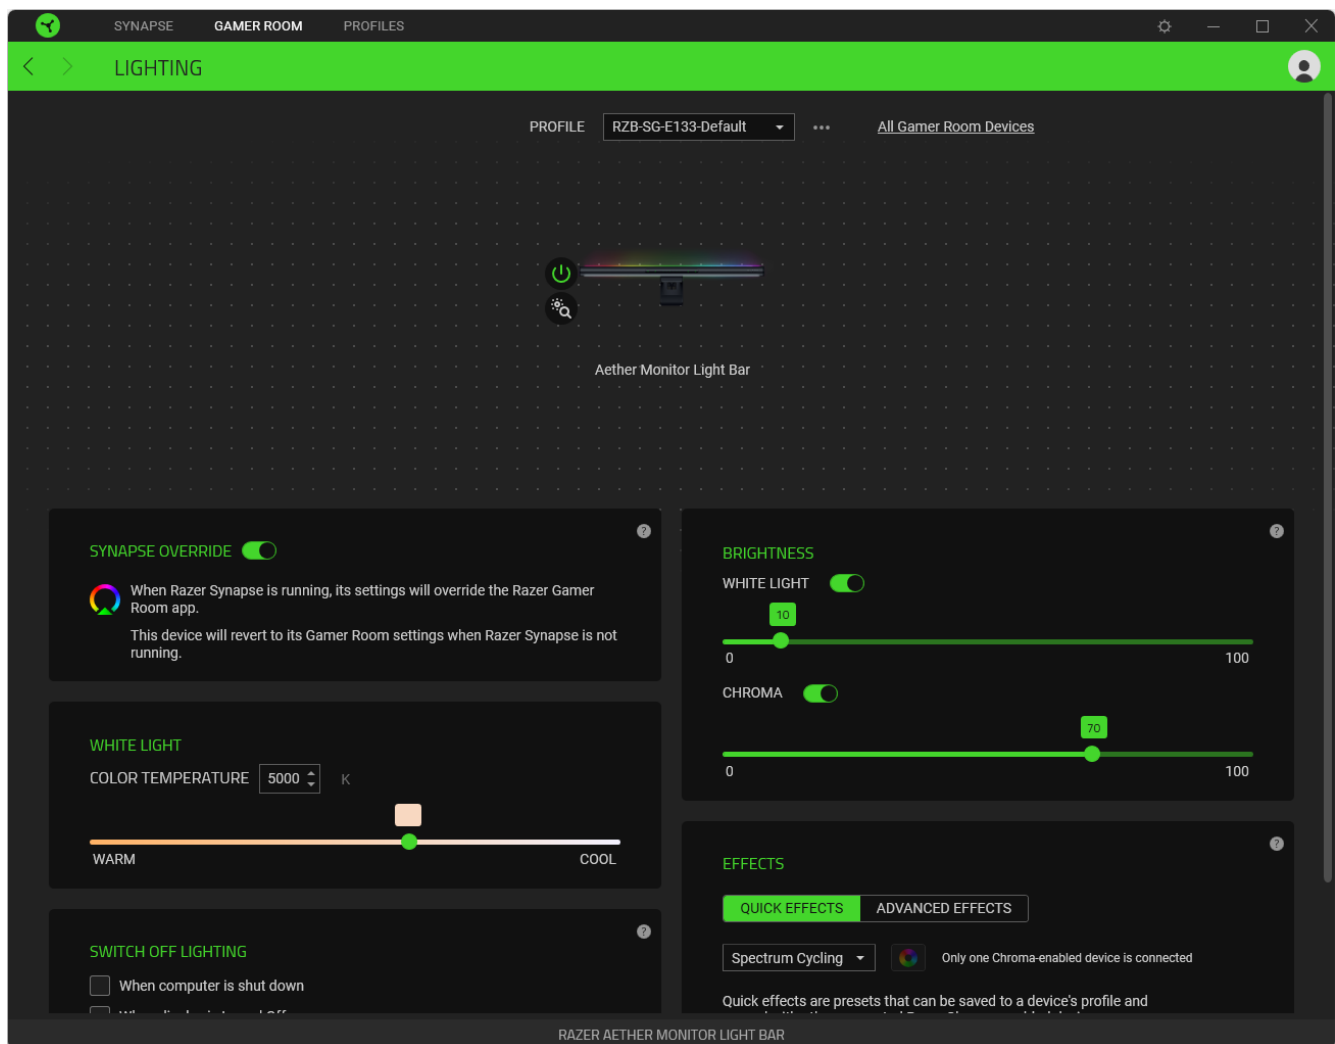

Profile

A Profile is a data storage for keeping all your Razer device's settings. By default, the profile name is based on your system's name. To add, import, rename, duplicate, export, reset or delete a profile, press the Miscellaneous button (●●●).


All Gamer Room Devices

Redirects you to the Synapse > Gamer Room subtab, where you can manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app.


Power on/off a device

You can turn your Razer device on or off by clicking the Power on/off button ().


Identifying a device

Click the Identify button () to show where your Razer device is in your physical setup.

Renaming a device

Assign your preferred name to your Razer device by clicking on the device name with the Rename cursor ().

Removing a device

Remove a Razer device from your setup by hovering the cursor on its image and clicking the Remove button ().

 *Once removed, you must add the device again on Razer Synapse.*

Synapse Override

Enable this setting to automatically take over and override Razer Gamer Room app settings whenever Razer Synapse is running.

Brightness

Adjust the luminance of your Razer device's white light or Chroma using the corresponding sliders, or turn them off entirely by toggling each option.

White light






Adjust how warm or cool the device's lighting is.


Switch off lighting

This power-saving tool allows you to disable your device's lighting in response to your system shutting down or its display turning off and/or automatically power down when your device has been idle for a set time.

Quick Effects


Several effects can be selected and applied to the device's Chroma lighting, as listed here:

	Name	Backlight behavior	How to set up
	Ambient awareness	The lighting will reflect the averaged color on the selected screen region	Select or customize a screen region
	Audio meter	The backlight will light up according to the audio level with a default spectrum of colors	Select a Color Boost level
	Breathing	The lighting will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors
	Fire	The backlight will light up in warm colors to mimic the motion of flames	No further customization required
	Spectrum cycling	The lighting will cycle between 16.8 million colors indefinitely	No further customization required
	Starlight	The lighting will fade in and out using a random time and duration	Select up to 2 colors or randomize colors and select a duration
	Static	The lighting will remain lit in the selected color	Select a color
	Wave	The lighting will scroll in the direction selected	Select a wave direction

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button (). You can also exclude this device from Chroma Connect Apps & Games by enabling the option provided.

 Only devices that support the selected lighting effect will synchronize.

Advanced Effects


The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled device. To start making your own Chroma Effect, press the Chroma Studio button ().




PROFILES TAB

The Profiles tab is a convenient way to manage all your profiles and link them to your games and applications.

Devices


View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.

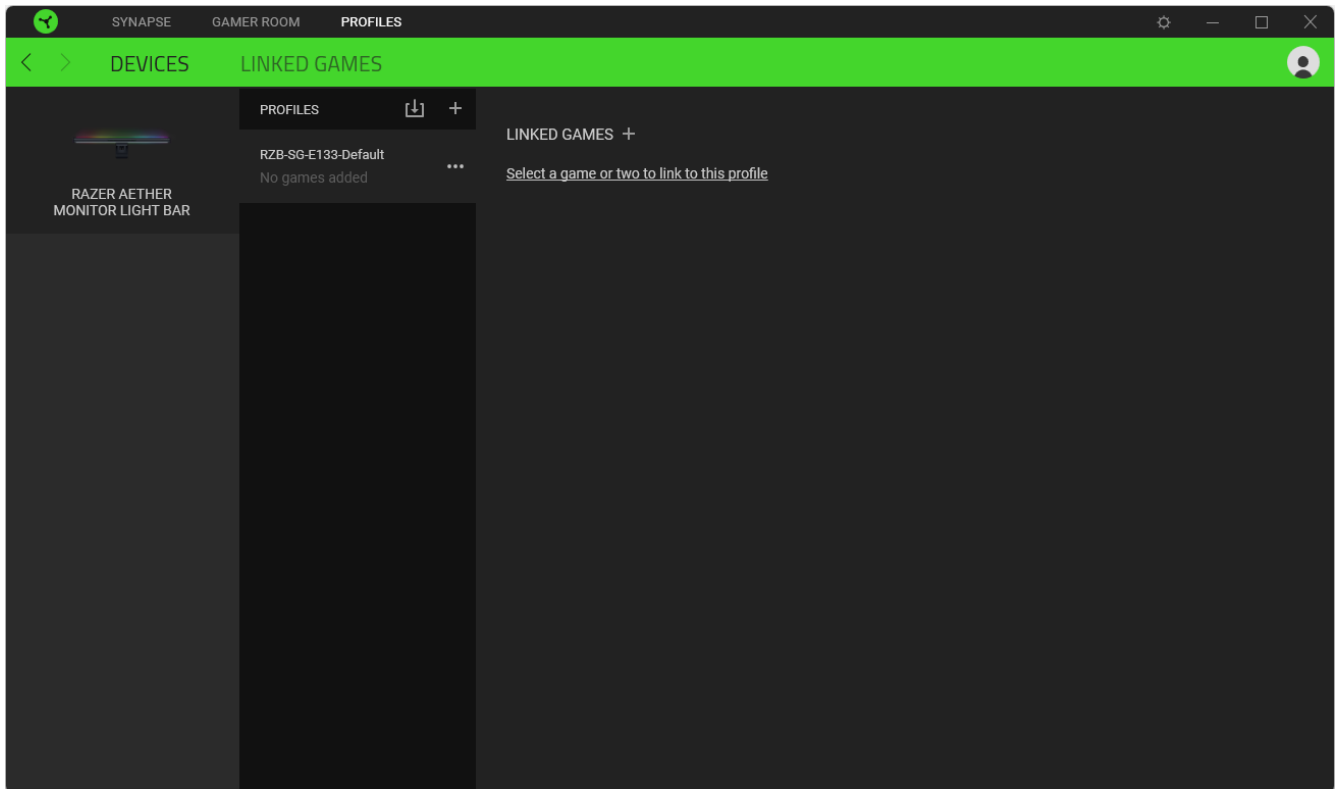

You can import Profiles from your computer or the cloud through the import button () or create new profiles within the selected device using the add button (). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (). Each profile can be set to activate when you run an application using the Linked Games option.

Linked Games


The Linked Games subtab allows you to add games, view devices linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here, even if not linked to a Razer device.

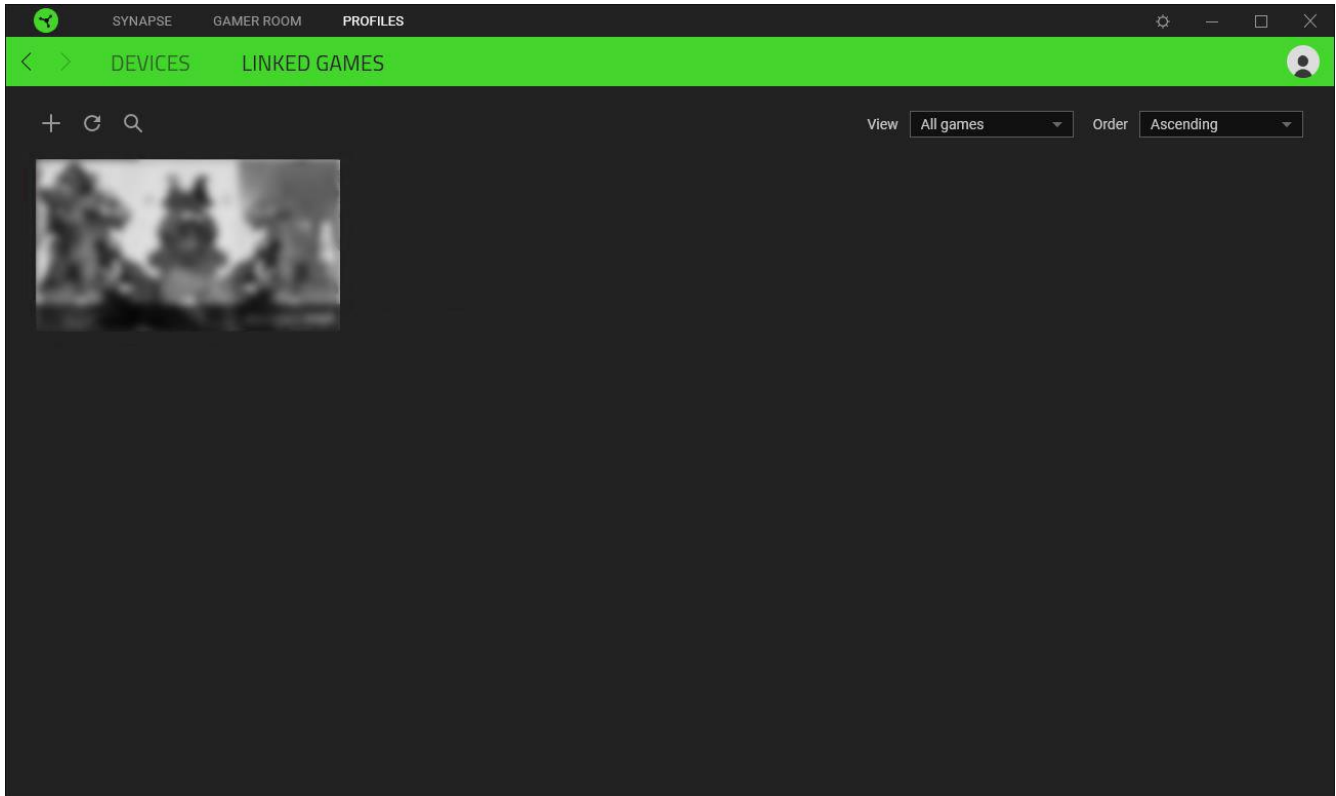

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once connected, you may click the Miscellaneous button (●●●) of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

SETTINGS WINDOW

The Settings window, accessible by clicking the (⚙️) button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, control the recommendations you see on the Dashboard, check the firmware version and master guide of each Razer device, or perform a factory reset on any connected Razer device.

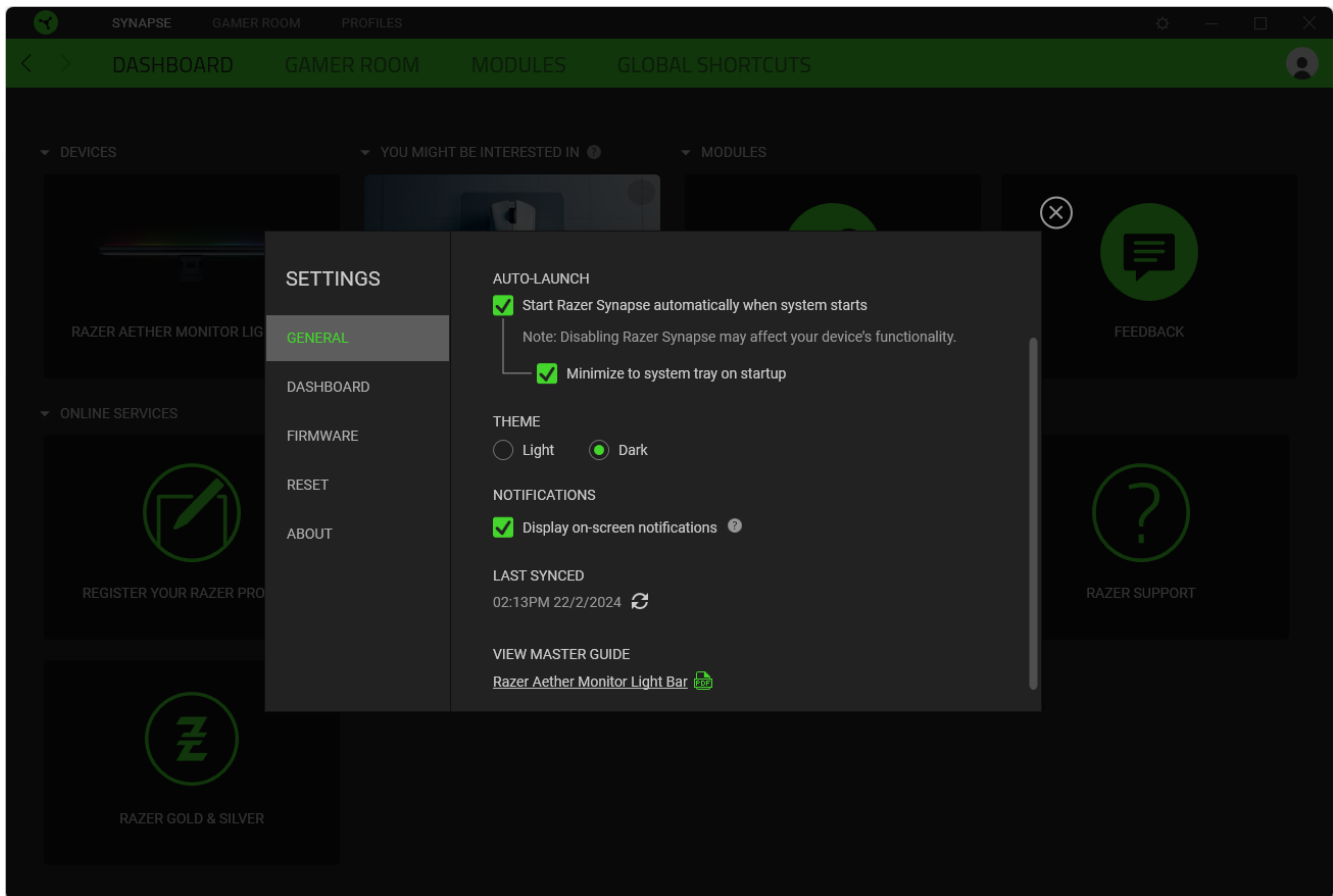

General tab

The General tab lets you change the software's display language, startup behavior, theme, and onscreen notifications. You may also manually sync your profiles to the cloud (↻) or view the master guide of all connected Razer devices and installed modules.

Dashboard tab

Use the Dashboard tab to customize which Razer device recommendations based on your setup, and the games you play will appear on the Dashboard.

Firmware tab

Access the Firmware tab to view the current firmware version of your Razer device(s), and/or visit the Software and Firmware Update page to see whether a firmware update is available for your device(s).

Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.



All profiles stored on the selected device's on-board memory will be erased when you reset a Razer device.

About tab

The About tab displays brief software information and copyright statement, and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as quick access to Razer's social communities.

9. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

To achieve maximum safety while using your Razer Aether Monitor Light Bar, we suggest that you adopt the following guidelines:

- Don't replace the light source of this device. This should only be replaced by the manufacturer, service agent, or a similarly qualified person.
- Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for assistance.
- Don't take apart the device, and don't attempt to operate it under abnormal current loads. Doing so will void your warranty.
- Only use the light bar indoors.
- Organize the light bar's cable to ensure that objects don't tug, pinch, or damage it.
- If the screen bar will not be used for an extended period, please power it off or unplug it.
- Keep the light bar away from liquid, humidity, or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the light bar to stabilize the temperature to an optimal level.

MAINTENANCE AND USE

The Razer Aether Monitor Light Bar requires minimum maintenance to keep it in optimum condition. Once a month, we recommend you unplug the light bar from the computer and clean it using a soft cloth or cotton swab to prevent dirt buildup. Don't use soap or harsh cleaning agents.

10. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2024 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers.", and "Powered by Razer Chroma" logo are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States or other countries. All other trademarks are the property of their respective owners.

Android, Google, Google Logo, Google Play, and the Google Play logo are trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Aether Monitor Light Bar (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in

so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.