

SM 12

USER MANUAL

5-IN-1


Bluetooth Speaker | Sleeping Machine | Mood Light & Wake Up Light
FM Radio | Alarm Clock With Snooze



BASIC FEATURES

Item Size: 115*63*155mm	Battery: 2200mAh
Input: 5V/1A	Charging Time: 3-4h
Working Time: 3-4h	
◆Speaker:	
Bluetooth: V5.3	Speaker: 66mm,10W
◆Led Night Light:	
Led Qty: 18pcs	Led Type: Warm

PRODUCT DESCRIPTION

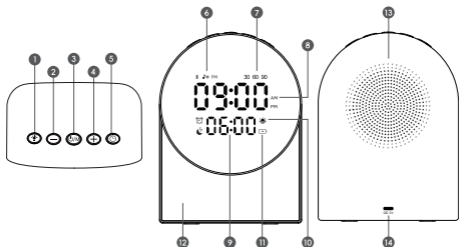

① Led Light Control Button	⑧ Time Display Area
② Previous Track Or Volume Down Button	⑨ Alarm Clock Display Area
③ Power ON/OFF, or Mode/pause Control Button	⑩ Wake Up Light ON/OFF Display Area
④ Next Track Or Volume Up Button	⑪ Charging Indicator Display Area
⑤ Timer/time/alarm Clock Setting Button	⑫ Led Light Area
⑥ Modes Display Area	⑬ Loudspeaker Area
⑦ Timer Display Area	⑭ Type C Power Input Slot

HOW TO OPERATE LED LIGHT?

Mood light

Long press 2 seconds the light button [🔆] to turn on/off the led light, Short press it to choose the brightness which fit you best, There are total five brightness levels for choice.

Wake up light

It will be activated and lighting on slowly from 0% to 100% within 15 minutes before alarm clock setting,

1st way: follow the Alarm Clock setting, Choose the "L ON" then Wake up light icon on;

2nd Way: Press button [⊕] twice to activate the Wake up light icon on;

HOW TO CONNECT BLUETOOTH?

Long press 2 seconds button [🔆] to turn on the device, The default is Bluetooth mode, And led light on time area will display "BLUE" then go back to time display in 2 seconds, [🔆] at the mode area will flicker fast at the same time. Start pairing automatically once Bluetooth on, Follow the operating instruction of your Bluetooth device such as phone or pad etc, And allow it to search Bluetooth state, After a few seconds your Bluetooth device will discover the Bluetooth speaker under "SM12", Select this and your device will confirm this pairing. You can start play music through the speaker.

Short press [🔆] to pause the Bluetooth playing;

Press once [⊖] to go previous track, or long press to get volume down.

Press once [⊕] to go next track, or long press to get volume up.

The led icon [🔆] on mode display area will get fast flicker while waiting for pairing;

And will get constant when paired and playing;


HOW TO PLAY SLEEPING SOUNDS?

Short press twice the button [🔆] to switch to the sleeping sound mode, The led light on time area will display "SL EP" then go back to time display in 2 seconds, [🔆] at the mode area will be constant display at the same time. There are total 20 optional sleeping sounds and you can choose the best sound you like:

Group 1-Soft Piano Sounds: Ode To Joy, Castle In The Sky, Moonlight Sea Of Clouds, Kiss The Rain, Fur Elise;

Group 2-Nature Sounds:Water Channel, Babbling Brook, Small Rain,Rain&Thunder,Sea Wave, Cracking Fire,Cricket,Birds,Sea Gull, Frogs, Dogs;**Group 3-Baby Sounds:**Little-Star, Brahms Lullaby;

Long press [] to get volume down,Or press once to go previous sleeping sound.

Long press [] to get volume up,Or press once to go next sleeping sound.

Short press the button [] to pause the playing song;

Timer Settings via Short Press of []


1st Press → 30-minute countdown (display shows "30")


2nd Press → 60-minute countdown (display shows "60")

3rd Press → 90-minute countdown (display shows "90")

4th Press → Turn off the timer.

HOW TO OPERATE FM RADIO?

Short press twice the button [] again to switch to the FM radio mode,The led light on time area will display "CH01" then go back to time display in 2 seconds,[FM] at the mode area will be constant display at the same time.

Short press once the button [] to searching FM channels by frequency range from 87.8 to 108.0 Mhz,press once again to stop it during searching the channel.





Short press the button [] to pause the FM radio play;





Long press [] to get volume down,or press once to go previous channel.





Long press [] to get volume up,or press once to go next channel.





◆ P.S:In order to search as more as possible channels,Please release the radio antenna to max length.




HOW TO SET CLOCK/ALARM?

Long press 2 seconds the button [] to enter the clock setting mode..At this point the number of hours [] will flicker,Adjust the hour by pressing [] or [] .




Short press the button [] again to switch to the minute [] setting area,The minutes will flicker,Adjust the minute by pressing [] or [] .




Short press the button [] again to enter the alarm clock setting mode.At this point the number of hours [] will flicker,Adjust the hour by pressing [] or [].

Short press the button [] again to switch to the alarm minute setting area,The minutes [] will flicker adjust the minute by pressing [] or [] .

Short press the button  again to switch to choose the alarm sound setting, Then choose the alarm song by pressing  or . There are total 7 optional alarms (6 melody songs + FM Radio) you will see the clock LED light display optional numbers: 01/02/03/04/05/06/07







◆ P.S: If you choose "07" as alarm song, FM Radio will be activated and play the last channel you played when the clock arrives at the alarm setting time.



Short press the button  again to go through the alarm volume setting, Then choose the alarm song volume by pressing  or  from 10/20/30/40/50/60/70/80/90/100%.




Short press the button  again to switch to the alarm ONE/ALL setting, Choose ONE/ALL by pressing  or .





One: the alarm clock will just ring once at the time set.

All: the alarm clock will ring every day at the time set.


Short press the button  again to go through alarm ON/OFF setting, Choose ON/OFF by pressing  or . Once you choose alarm "ON", The alarm icon  will display on, The alarm will ring against the alarm setting time. Snooze function will be activated via pressing button  once while alarm ringing, the snooze icon  will display on, The Alarm ringing will last 2 minutes each time, and alarm again in each 5 Minutes, total five times as a snooze cycle each day.

Press any button except  to end the snooze and ring while alarm ringing, the snooze icon  will display off.

◆ P.S: If you choose "07" -FM Radio, Above snooze setting is not available, Instead, The FM radio will activated and play the last channel constantly as alarm in any play mode. The alarm icon  will flicker slowly, Press any button except  to end the snooze and the alarm icon  will get off constantly.

Short press the button  again to switch to set wake up light, Then choose ON/OFF by pressing  or . "L ON" means wake up light on, the icon  will display on, The wake up light will be activated and lighting on slowly from 0% to 100% within 15 minutes before alarm clock ringing.

"L OF" means wake up light not be activated, The icon  will not display on.

After above steps are done in sequence, Short press the button  again or do not press any button for 5 seconds, The device setting will be completed and go back to main screen display.

Remark:

1-Fast Press 2 times the button [⊖] to turn down Alarm clock display to 75% Brightness, Fast Press 2 times again the button [⊖] to turn down Alarm clock display to 50% Brightness, Fast Press 2 times again the button [⊖] to turn on/off Clock/Alarm display;

2-Fast press 3 times this button [⊙] to switch the time between 12h and 24h system.

3-Long press 10 seconds this button [⊙] to go through factory restart, You will see the default clock display is 12:00 pm, And default alarm clock display is 08:00 and alarm clock off.

4-In order to save the battery power and prolong working time, The time screen display will turn down to 25% brightness in 2 Minutes. Moreover, If the RGB light is off, but also Bluetooth not paired or Sleeping Machine paused, The time screen display will turn off in 10 minutes automatically and goes to low power consumption mode, press any button to activate the time display again in this mode.

5-Press twice [⊖] to turn On/Off Alarm clock directly.

6-Press twice [⊕] to turn on/off Wake up light

BUILT-IN BATTERY

Battery capacity is 2200mAh, Please charge this device by the type-c charging cable provided. It will last 3-4h for full charge;

Low battery: If the power voltage is lower than 3.2V, The charging icon [⊞] will flicker fast in 5 minutes, And then power off automatically to protect the battery, Please charge the unit using the type-c charging cable provided. The charging icon [⊞] will be constant while charging, And then turns off once it is fully charged;

Notice

- Do not let children play the product.
- Do not hit or beat the product.
- Do not use in very humid and high temperature environments
- Do not throw the product into fire.
- Do not block speaker's net above the body
- Please send to repair when the product is broken. Do not disassemble it by yourself.
- It's not covered under warranty when the product has metal of rust, surface spalling and other natural oxidation.

Battery removal/disposal

Your product contains batteries which cannot be disposed with normal household waste. Doing so may harm the environment. Please inform yourself about the local rules on separate collection of batteries because correct disposal helps to prevent negative consequences for the environmental and human health. Should your product develop a fault and your battery needs replacing.

Please do not remove the battery!