

SCAPADE

AirPro




Dual Bluetooth transmitter Share Audio with 2 Devices

User manual | Manuel d'utilisation |
Manual de usuario | Manuale d'uso | Manual do usuário |
Bedienungsanleitung | Gebruikershandleiding

Technical specification

- Bluetooth Version: V5.3
- Frequency Range: 2.4GHz – 2.48GHz
- Output Power Category: Class 2
- Bluetooth Modes: HFP / HSP / A2DP / AVRCP
- Range: Up to 33 ft (10 m)
- Battery Capacity: 230 mAh
- Working Current: 20–25 mA
- Charge Voltage: DC 5.0V
- Charge Current: 150 mA

Product diagram

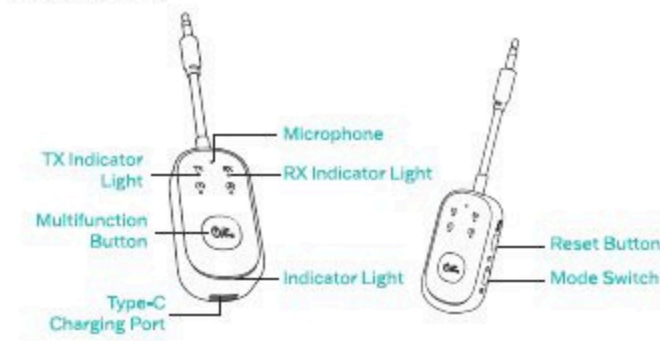

Charge the Device

1. Before first use, fully charge the product. The indicator light will remain red while charging and turn off when charging is complete.
2. When the device is in low-power mode, the indicator light will flash red. Please charge it promptly using a DC 5V power source only (do not use a power source higher than 5V).

Note:

If the device is not used for a long period of time, charge it at least once every three months.

Transmitter and Receiver Mode



Transmitter Mode (TX):

Used to transmit audio from a wired headphone jack—such as on an airplane, TV, or treadmill at the gym—to your headphones or Bluetooth earphones. In transmitter mode, it can only be paired with your Bluetooth earphones and is not compatible with phones, MP3 players, tablets, etc.

Receiver Mode (RX):


Used to receive Bluetooth audio from devices such as smartphones or tablets and transmit it to the connected audio system (e.g., car, boat) via the AUX-IN port. In receiver mode, it can only be paired with your Bluetooth-enabled phone, MP3 player, tablet, etc., and is not compatible with Bluetooth earphones or Bluetooth speakers.

-4-

EN

Transmitter Mode: Pair with Bluetooth Headphones or Bluetooth Speakers

1. Slide the switch to the "TX" side. The indicator light will flash blue and red, indicating the device is in pairing mode.

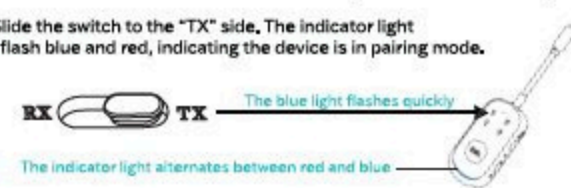


2. Turn on your Bluetooth earphones or Bluetooth speaker and ensure they are in pairing mode.



3. The product will pair with your Bluetooth earphones. When the indicator light flashes blue three times and then turns off, pairing is successful. The TX indicator light will continue to flash once every 5 seconds to show the device is in transmitter mode.




4. You can now enjoy your music from a non-Bluetooth media device through your Bluetooth speaker or Bluetooth earphones.



-2-

Pair with Second Bluetooth Headphones or Bluetooth Speakers

1. After pairing with the first Bluetooth earphone, long-press the Reset Button for 3 seconds. The indicator light will flash blue and red, indicating it is in pairing mode.

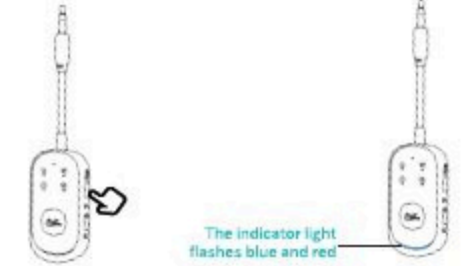

2. Turn on your Bluetooth earphones or Bluetooth speaker and ensure they are in pairing mode.



3. The product will pair with your second Bluetooth earphones. When the indicator light flashes blue three times and then turns off, pairing is successful. The TX indicator light will continue to flash once every 5 seconds to show the device is in transmitter mode.




4. Now you can pair two earphones simultaneously with the product, allowing you to enjoy music together with a friend.



-3-

Receiver Mode: Pairing with Your Bluetooth-Enabled Smartphone, Tablet, etc.


1. Slide the switch to the "RX" side. The indicator light will rapidly flash red and blue, indicating it is in pairing mode.

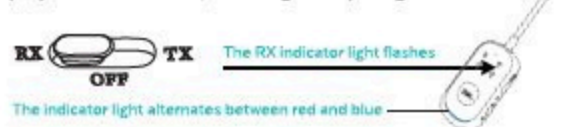

2. Enable the Bluetooth function on your smartphone and search for "AirPro" to connect.



3. Connect the product to your input port, such as headphones, home speakers, or car stereo system, using the provided 3.5mm audio cable.

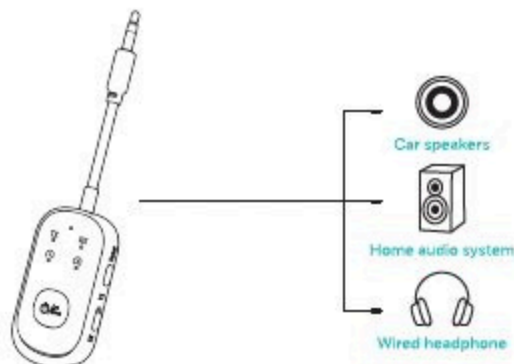

4. You can now wirelessly enjoy music or answer hands-free calls.

-4-

Pair with Second Smartphones, Tablets, etc.

1. After successfully pairing with the first smartphone, turn off the Bluetooth function of the first smartphone. The product will then re-enter pairing mode.

2. Turn on the Bluetooth function of the second smartphone and search for "AirPro" to connect.



3. Turn on the Bluetooth function of the first smartphone and select "AirPro" from your pairing history.

4. Now, two smartphones are connected to the receiver at the same time.

Operations

Power On	Long press the MFB for 2 seconds
Power Off	Long press the MFB for 5 seconds
Play / Pause / Answer / Hang up	Press the MFB once
Redial last number / Reject a call	Press the MFB twice
Activate Siri (mobile phone)	Triple press the MFB
Toggle call audio between car speakers and phone handset (in RX mode)	Long press the MFB for 2 seconds
Clear pairing information	Triple-click the Reset Button while connected in RX/TX mode

Note: MFB = Multifunction Button

Auto Connect

The product will automatically pair with the last connected device when turned on again. (Before turning on the Bluetooth receiver, enable Bluetooth on your smart device.)

Auto Power Off

The product will automatically power off if not paired with any device within 5 minutes.

-5-

EN

Troubleshooting

Q1: The product cannot pair with your Bluetooth-enabled phone, MP3, etc.
Make sure the switch is set to "RX" mode. Clear the Bluetooth list on your phone, MP3 player, etc., and try again.

Q2: The product cannot pair with Bluetooth speakers or Bluetooth earphones.
Make sure the switch is set to "TX" mode. Ensure only one Bluetooth speaker or earphone is turned on nearby.

Q3: The Bluetooth range or sound quality is not good.
The Bluetooth signal may be blocked by surrounding objects and reduce audio quality. Ensure there is no barrier between the adapter and your phone (or other device).

Q4: Why is there a delay?
There is a data transmission process between the two devices, which may sometimes cause a perceived delay. This is a common issue with all Bluetooth devices, including Bluetooth 5.3.

Q5: Why does the indicator light not turn on after selecting a mode?
Please make sure the product is fully charged before use.

Included in the pack

- Bluetooth Transmitter and Receiver x1
- Type-C Charging Cable x1
- Dual 3.5mm In-flight entertainment adapter x1
- User Manual x1

FCC Compliance Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, under Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy. If not installed and used according to the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception (determined by turning the equipment off and on), the user is encouraged to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that of the receiver.

-6-

RF Exposure Compliance Statement

This equipment complies with FCC radiation exposure limits set for an uncontrolled environment. This transmitter must not be placed or operated in conjunction with any other antenna or transmitter.

Correct Disposal of This Product



This marking on the product or its literature indicates that it must not be disposed of with other household waste at the end of its working life. To reduce potential harm to the environment or human health from uncontrolled waste disposal, separate this product from other types of waste and recycle it responsibly.

Household users: contact your retailer or local government office for recycling details. Business users: contact your supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial waste for disposal.

Safety Warnings

- Do not use a power source higher than 5V to avoid damage or fire risk.
- Disconnect the product once fully charged to prevent overheating.
- Do not leave the product charging unattended for long periods.
- Stop using immediately if the device emits heat, smoke, unusual odor, or noise.
- Do not use the product while it is wet or if the casing is damaged.
- Dispose of the product properly according to local electronic waste regulations (do not throw into household trash).

EU Safety Representative

SCAPADE LTD
Neofytou Nikolaidi & Theod. Kolokotroni, Onisiforou Center,
2nd floor, Agios Theodoros, 8011, Paphos, Cyprus
www.scapade.net | safety@scapade.net

EU Declaration of Conformity

The full text of the EU declaration of conformity is available at the following internet address:
www.scapade.net/certifications

Made in PRC | Scapade Ltd · Neofytou Nikolaidi & Theod. Kolokotroni,
Onisiforou Center, 2nd floor, Theodoros, 8011, Paphos, Cyprus

All brands or products names are or may be trademarks of their respective owners. Pictures and specifications are not contractual. 2 years warranty.

Reference: S-HBTT | Batch : SCAP0525



FR Pour le mode d'emploi en français, veuillez scanner le code QR vers notre site web.
ES Para el manual de usuario en español, escanee el código QR a nuestro sitio web.
IT Per il manuale utente in italiano, scansiona il codice QR sul nostro sito web.
PT Para o manual do usuário em português, escaneie o código QR para o nosso site.
DE Für die Bedienungsanleitung auf Deutsch scannen Sie bitte den QR-Code zu unserer Website.
NL Voor de handleiding in het Nederlands scant u de QR-code naar onze website.

-7-