


Item # : BU48JAR

Assembly Instructions

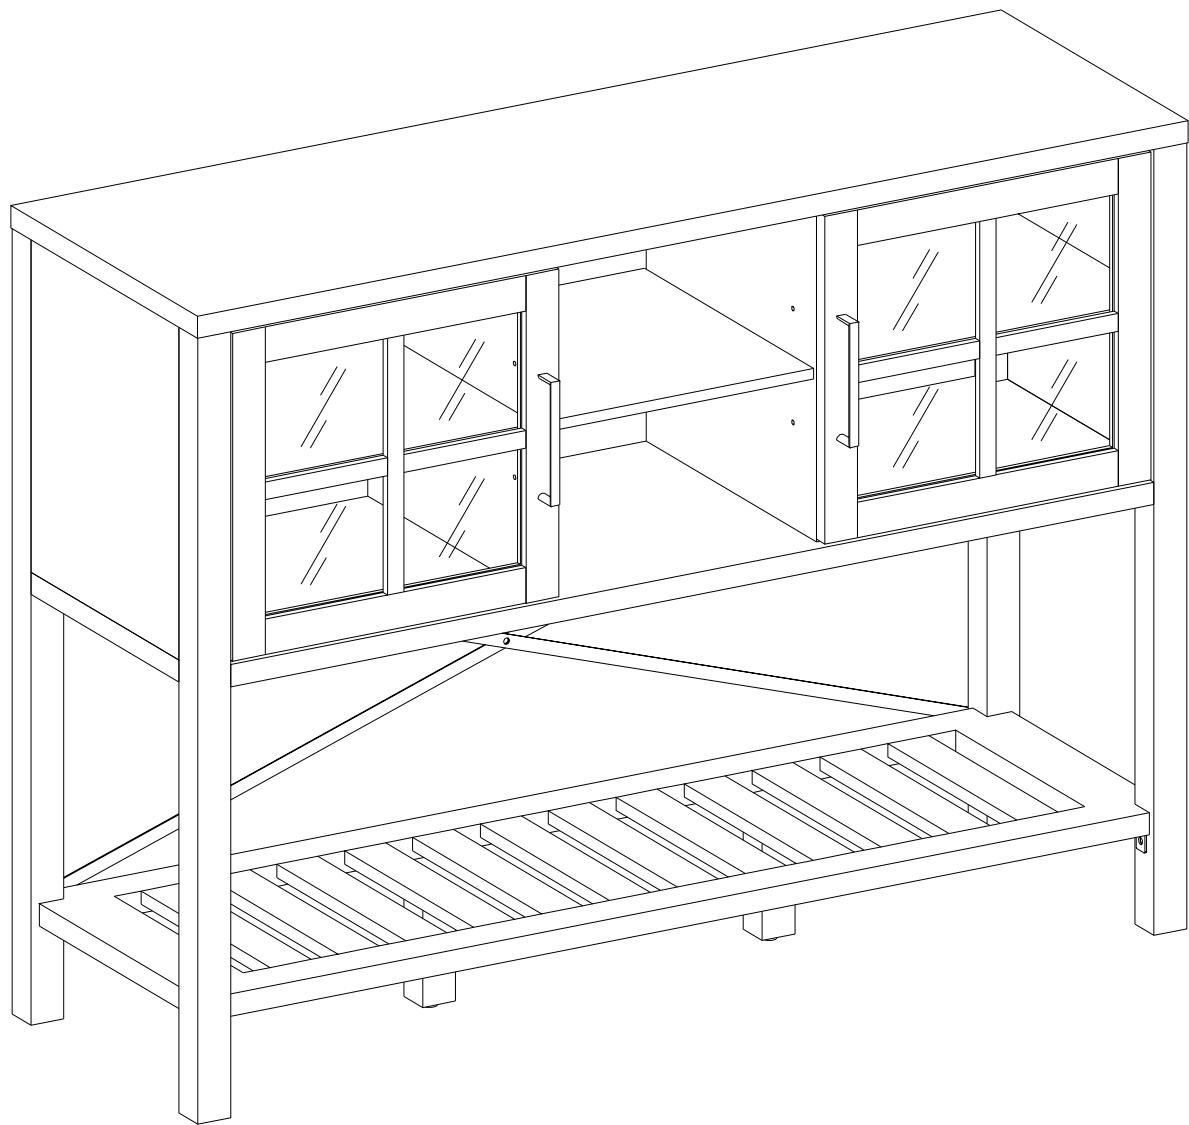


Walker Edison®

Please visit our website for the most current instructions, assembly tips, report damage, or request parts. www.walkeredison.com


Revised 01/08/2019(L)

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.

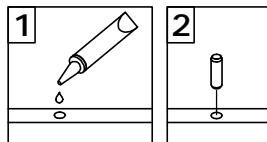


In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.



- VI. A Phillips head screwdriver is required for the assembly of this product .




- VII. Power tools should not be used to assemble this product.





- VIII. Drill may be needed for securing product to wall.

Parts List

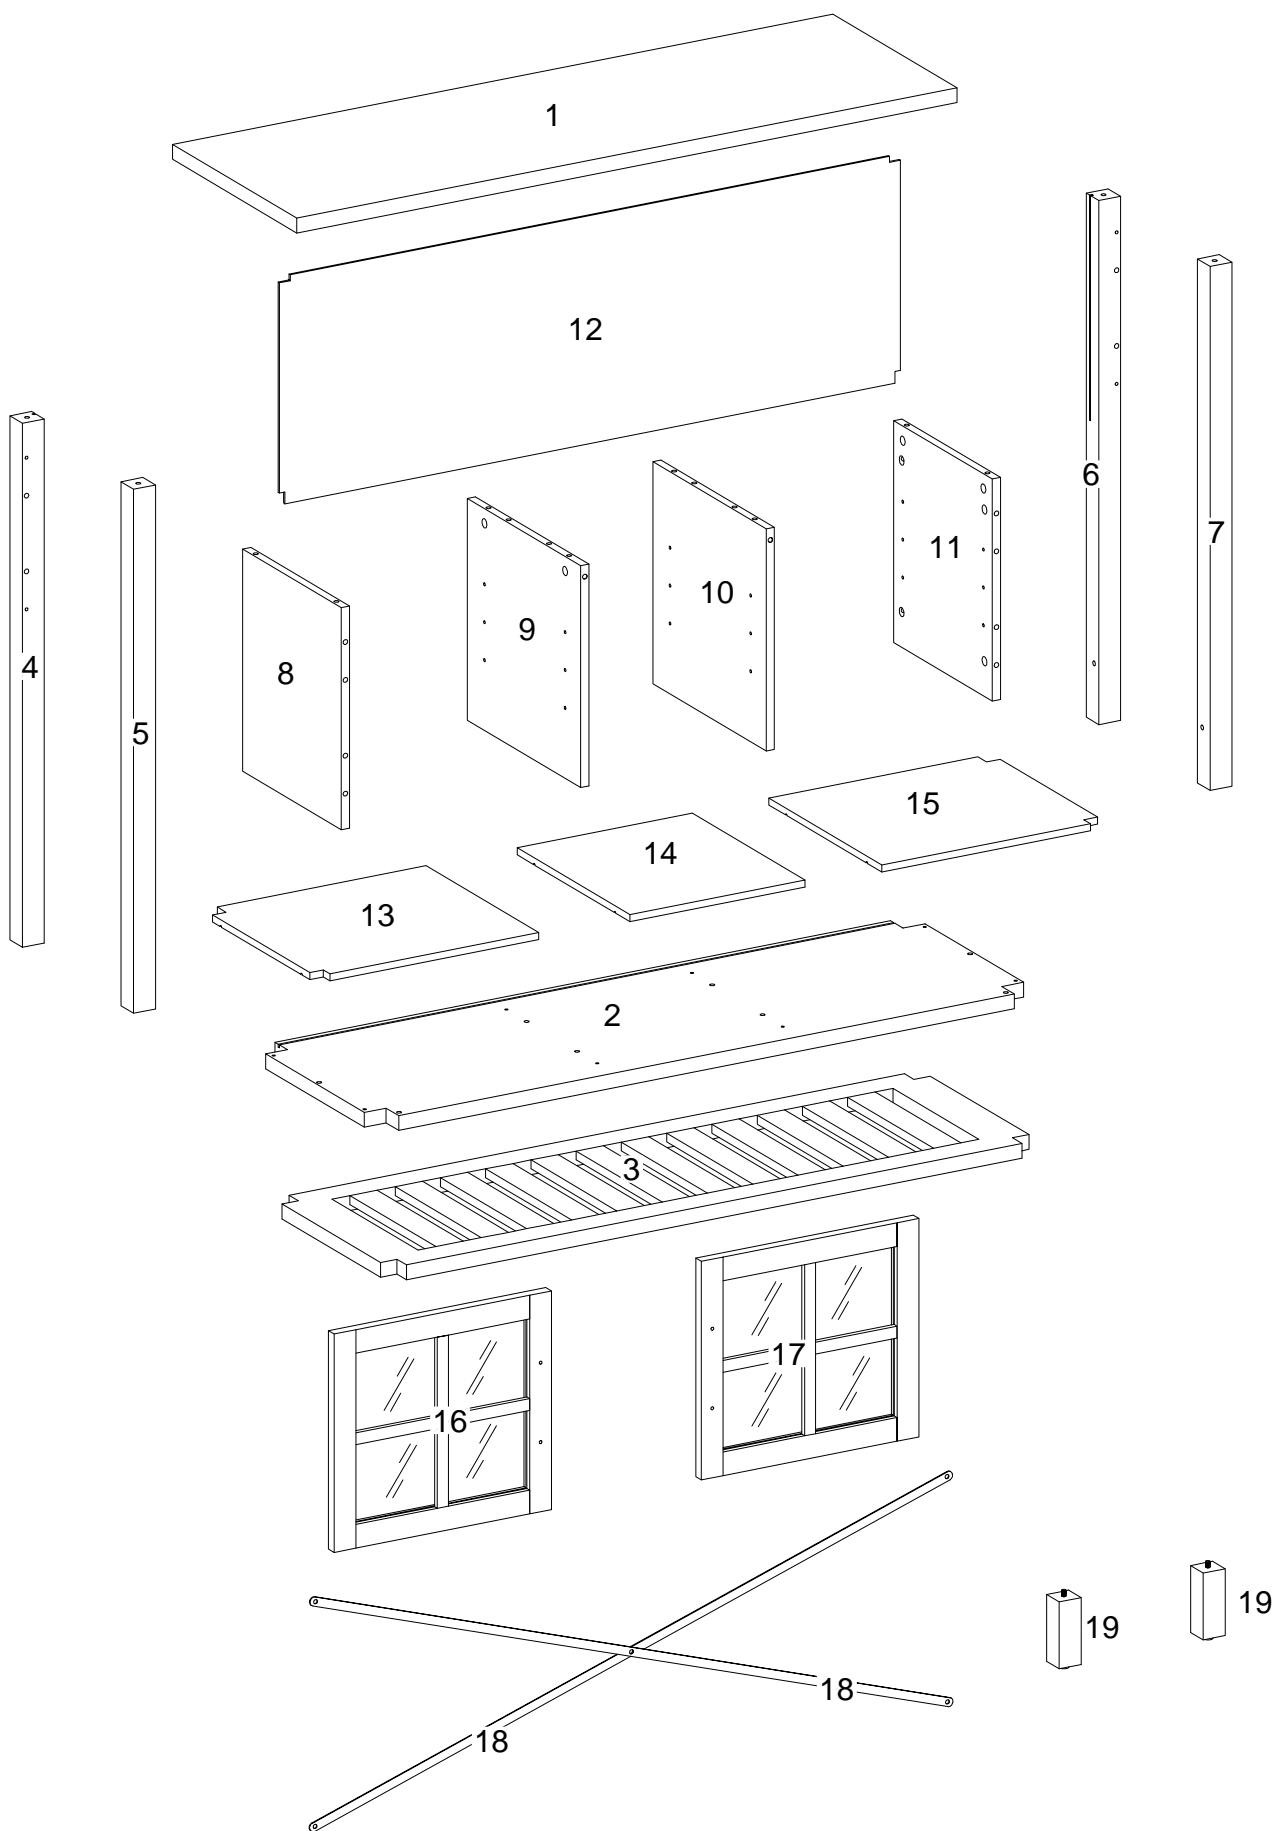

Hardware List


A		Ø8x30mm	Wooden dowel	22	pcs
B		Ø6x35mm	Cam bolt	16	pcs
C		Ø15x11mm	Cam lock	16	pcs
D			Sticker	16	pcs
E		Ø6x50mm	Bolt	8	pcs
F		M 4	Hex Key	1	pc
G			Wrench	1	pc
H			L shape bracket	4	pcs
J			Nut	1	pc
K		Ø6x12mm	Bolt	13	pcs
L			Handle	2	pc
M		Ø4x22mm	Handle Bolt	4	pcs
N			Plastic wedge	6	pcs
P		Ø3x17mm	Screw	6	pcs
Q			Shelf support pin	12	pcs
R		Ø3x14mm	Screw	8	pcs
S			Door Hinge	2	pcs
T			Door Hinge	2	pcs
U			Bolt	2	pcs
V			Plastic pivot	4	pcs
W			Velcro strap	2	pcs
X		Ø4x30mm	Screw	2	pcs
Y			Plug	2	pcs
Z		Ø4*15mm	Screw	2	pcs
Z-Z			Glue tube	1	pc



Philips head screwdriver required for assembly
(not included)


The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.

Step 1

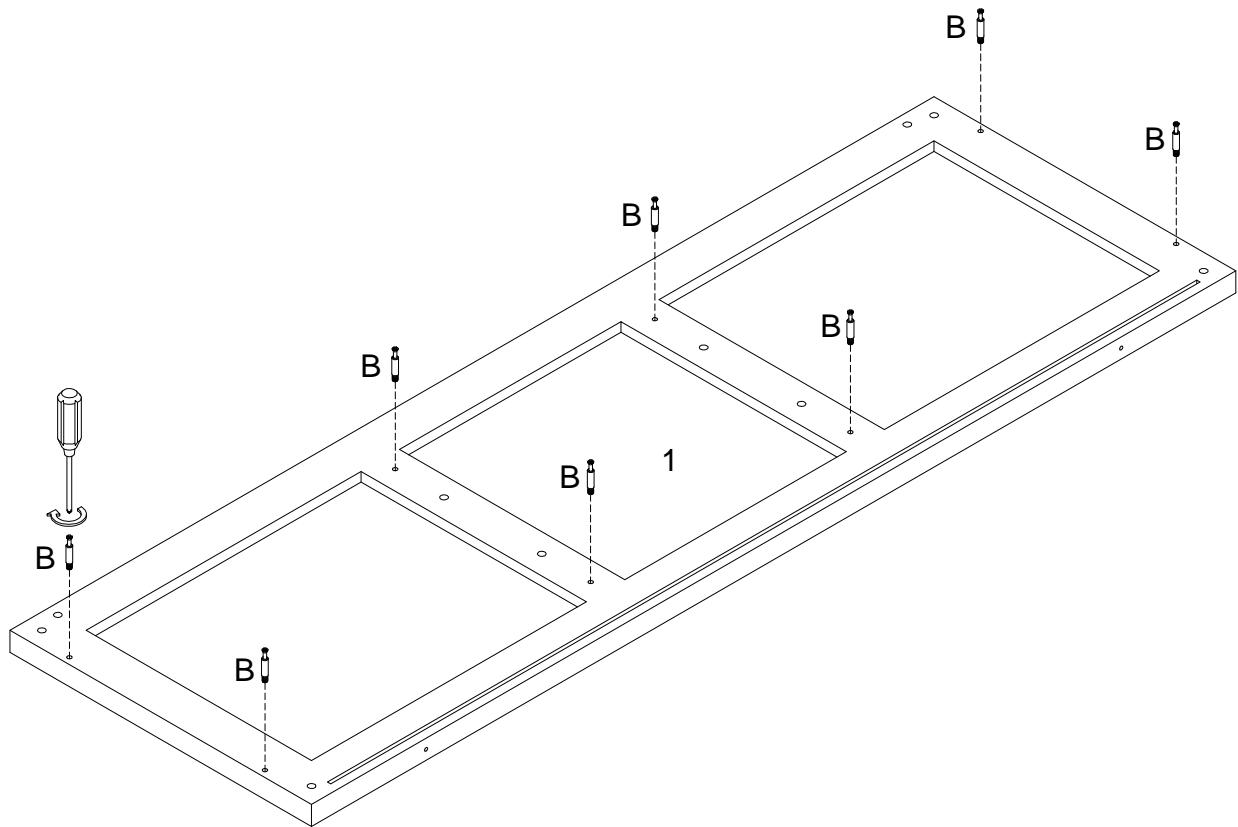


Secure cam lock(B) to part (1) with Phillips head screwdriver as per diagram.

Step 2

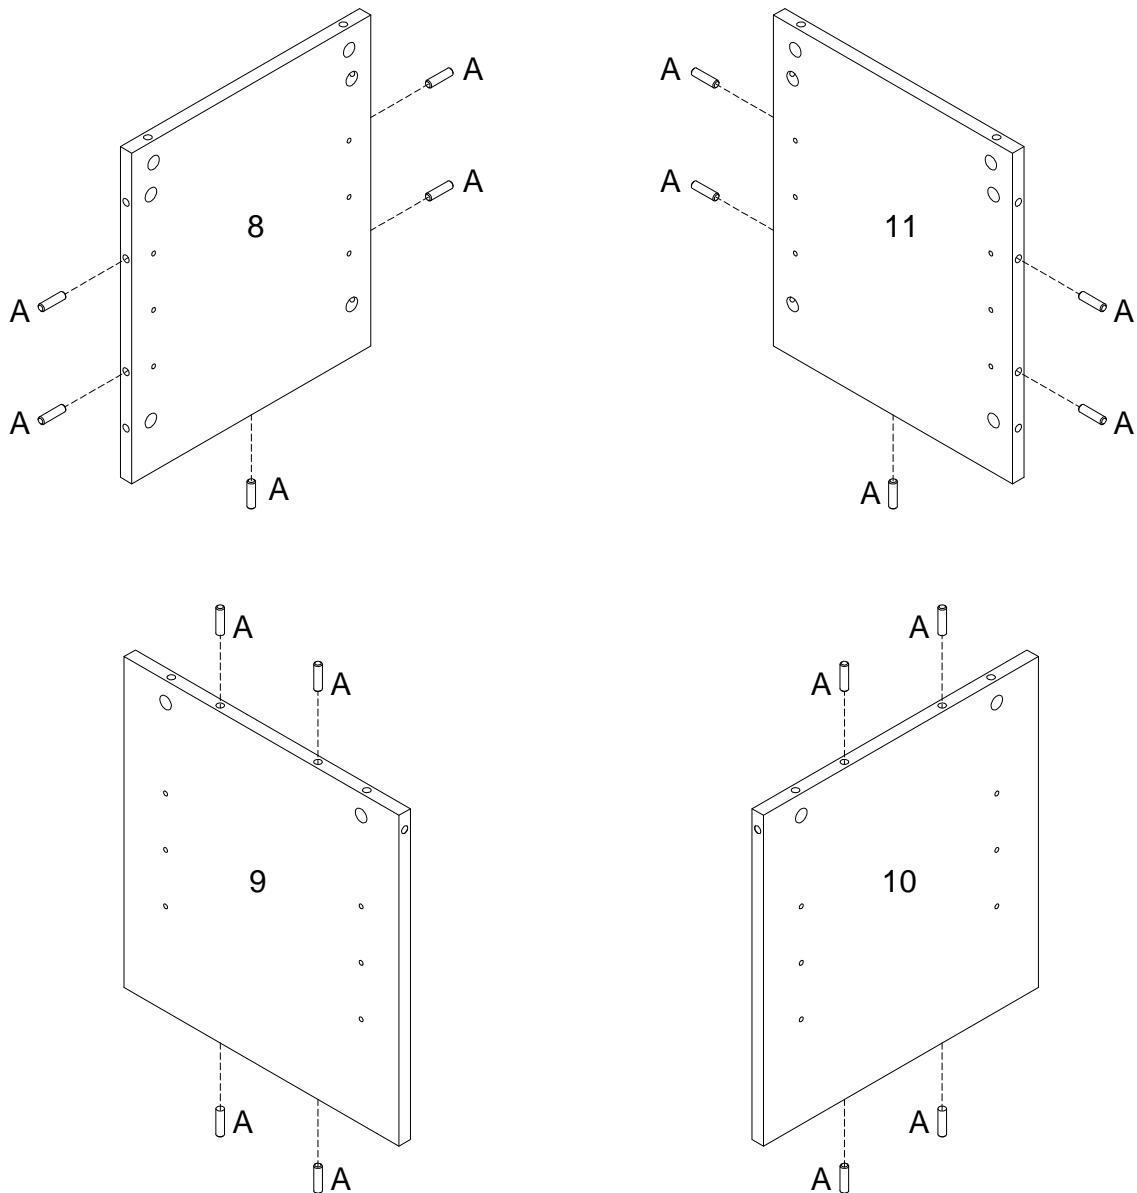



Insert wooden dowel (A) into parts (8,9,10,11) as per diagram.

Step 3

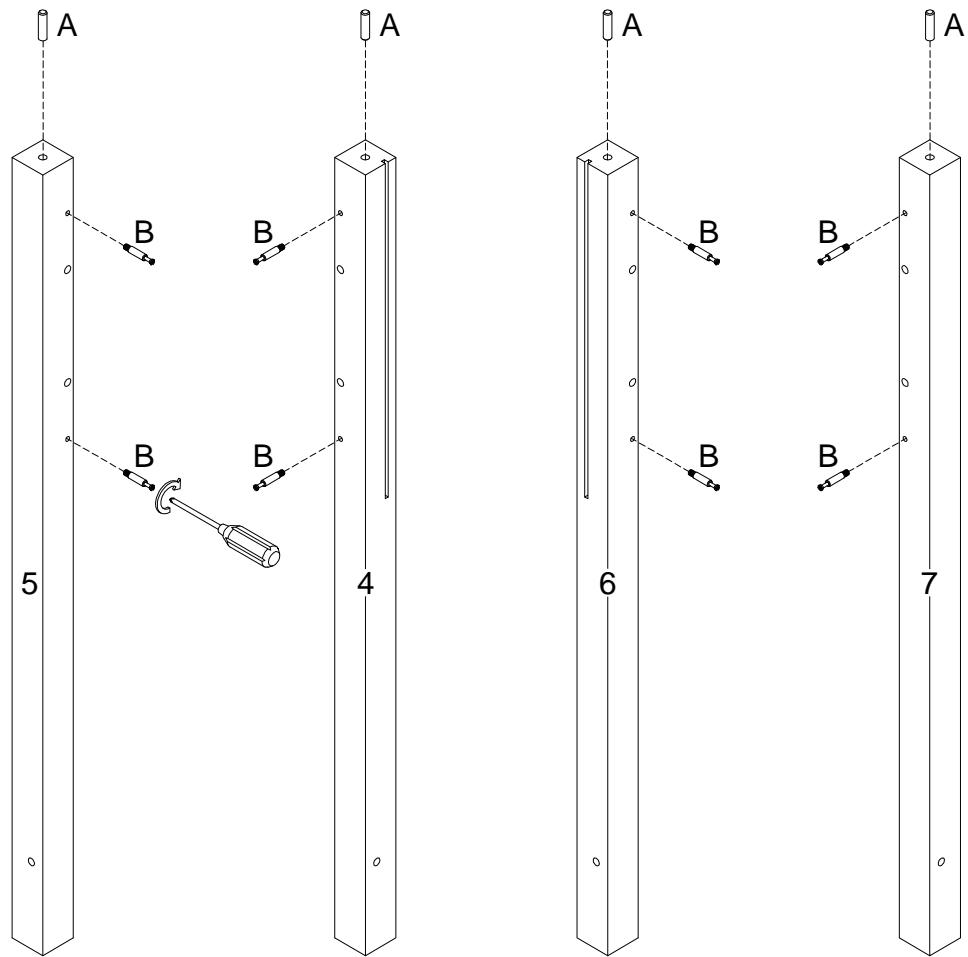


Insert wooden dowel (A) into parts (4,5,6,7) ,then secure cam lock (B) to parts (4,5,6,7) with Philips head screwdriver as per diagram .

Step 4

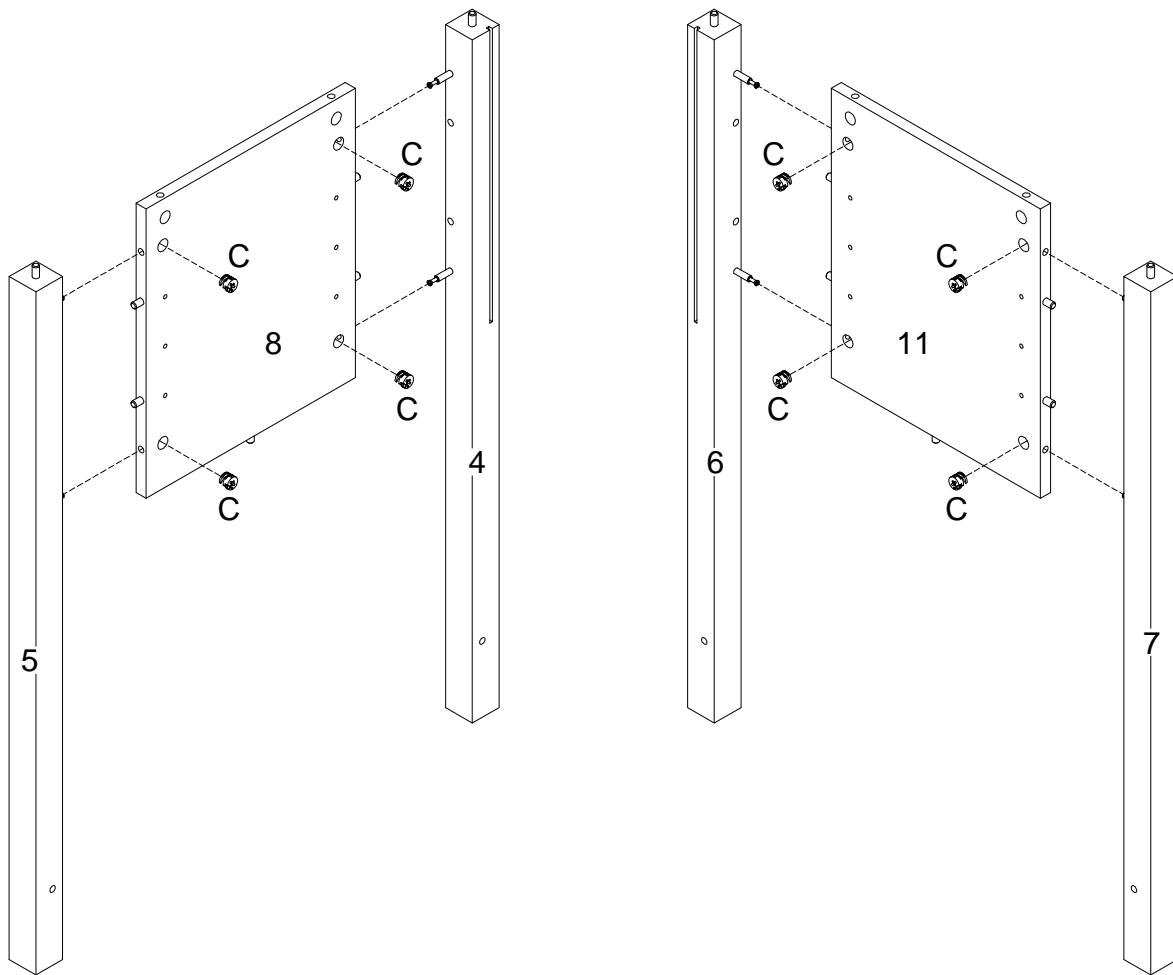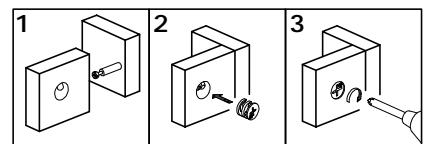


Using cam lock (C)secure parts (4,5) to part (8) ,parts (6,7) to part (11) with Philips head screwdriver as per diagram.

Step 5

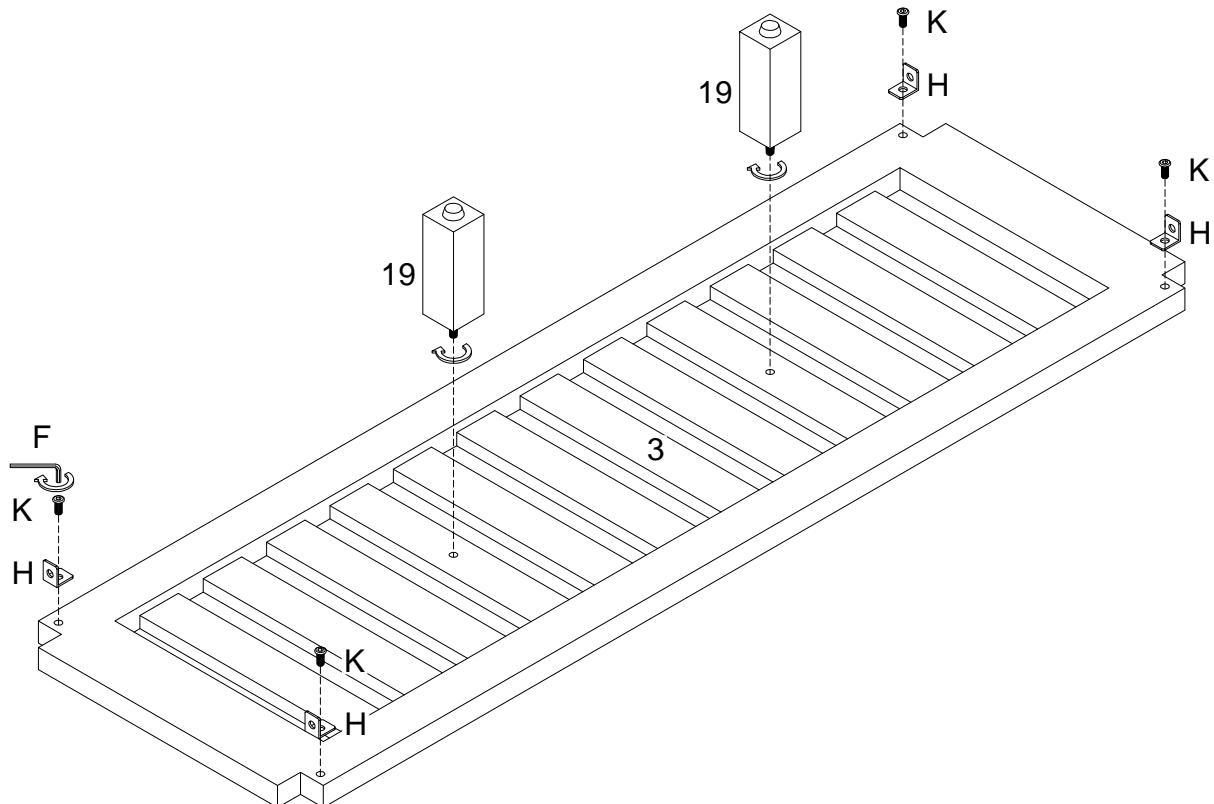


Using bolt (K) attach L shape bracket (H) into part (3) with hex key (F) ,then secure part (19) as per diagram.

Step 6

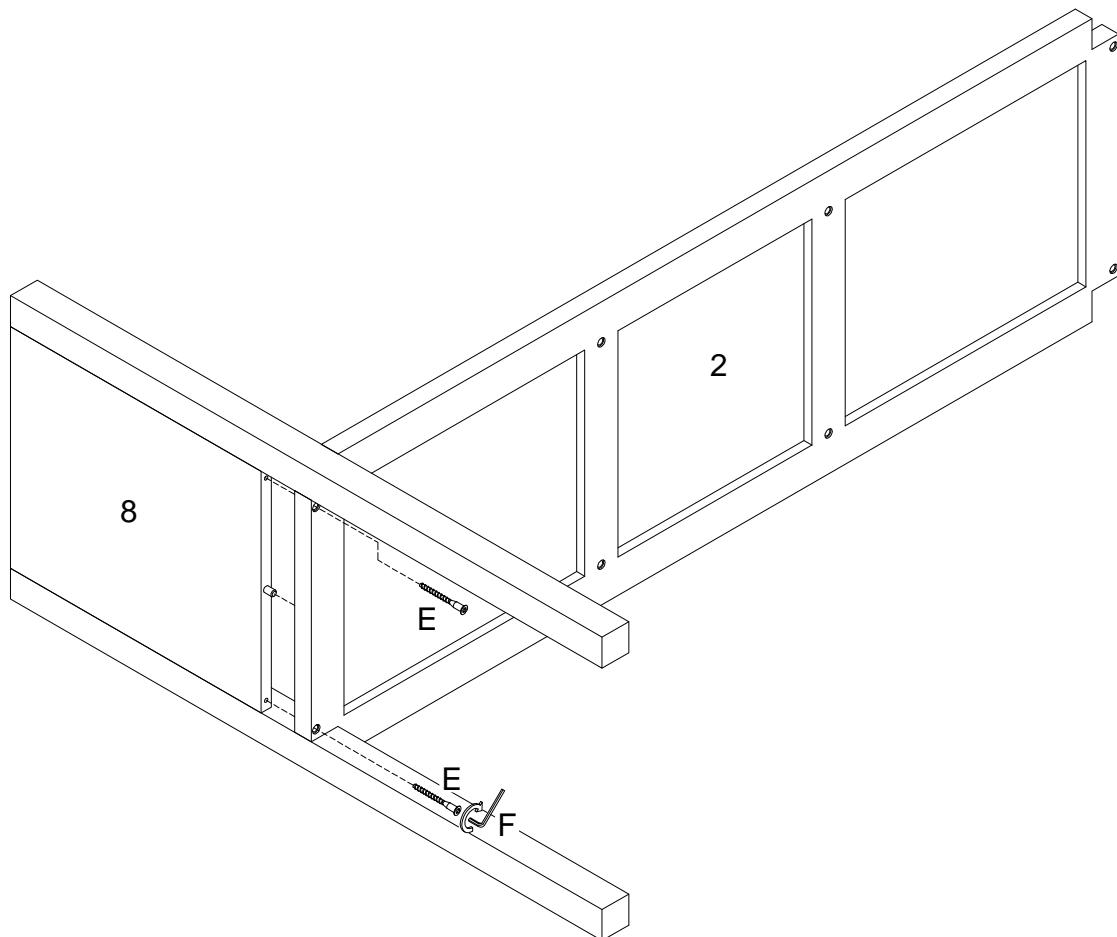


Using bolt (E) attach part (2) into part (8) with hex key (F) as per diagram.

Step 7

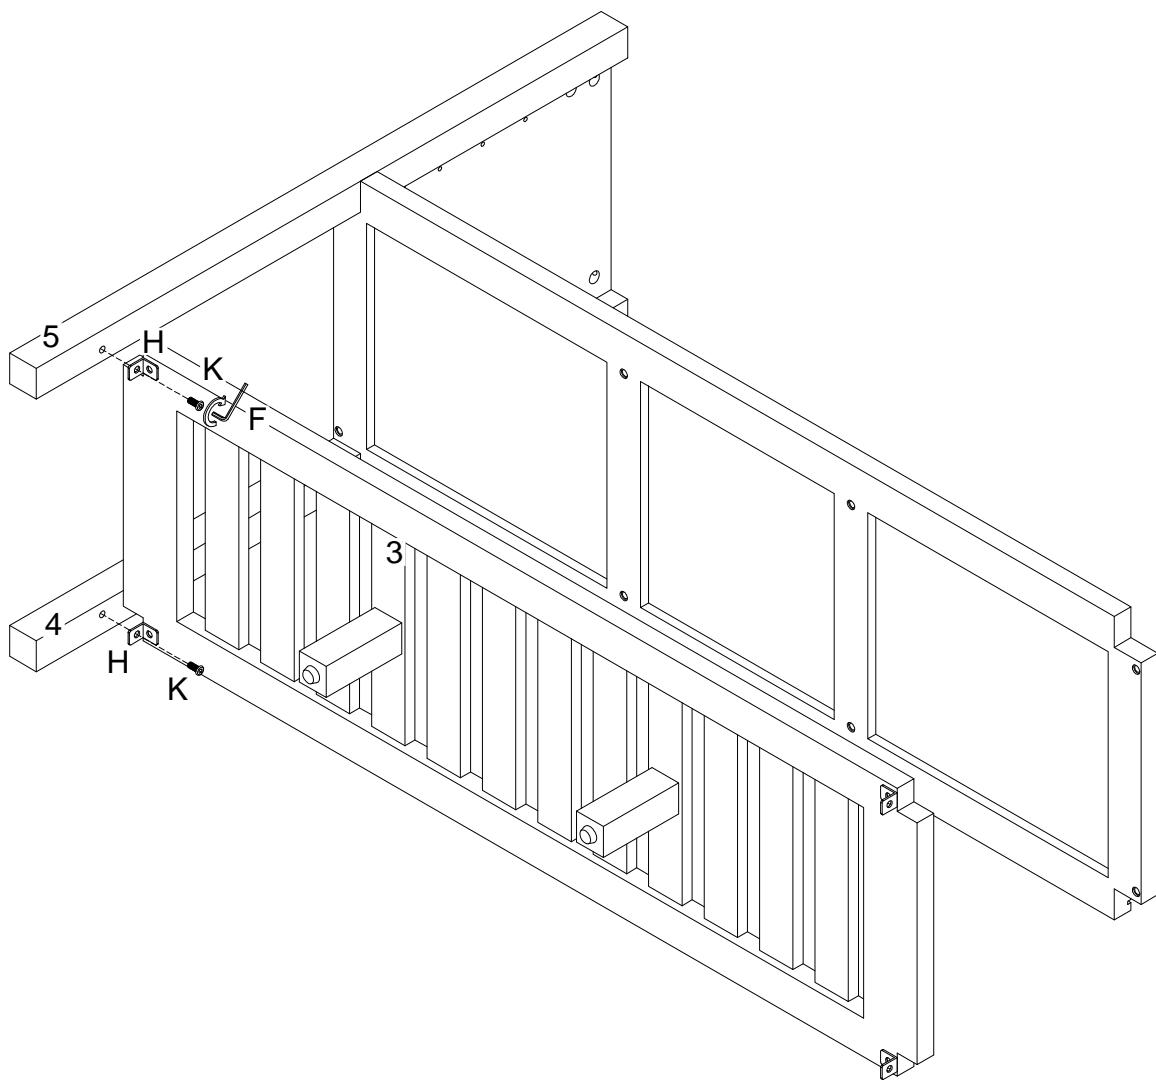


Using bolt (K) attach L shape bracket (H) into part (3) to parts (4,5) with hex key (F) as per diagram.

Step 8

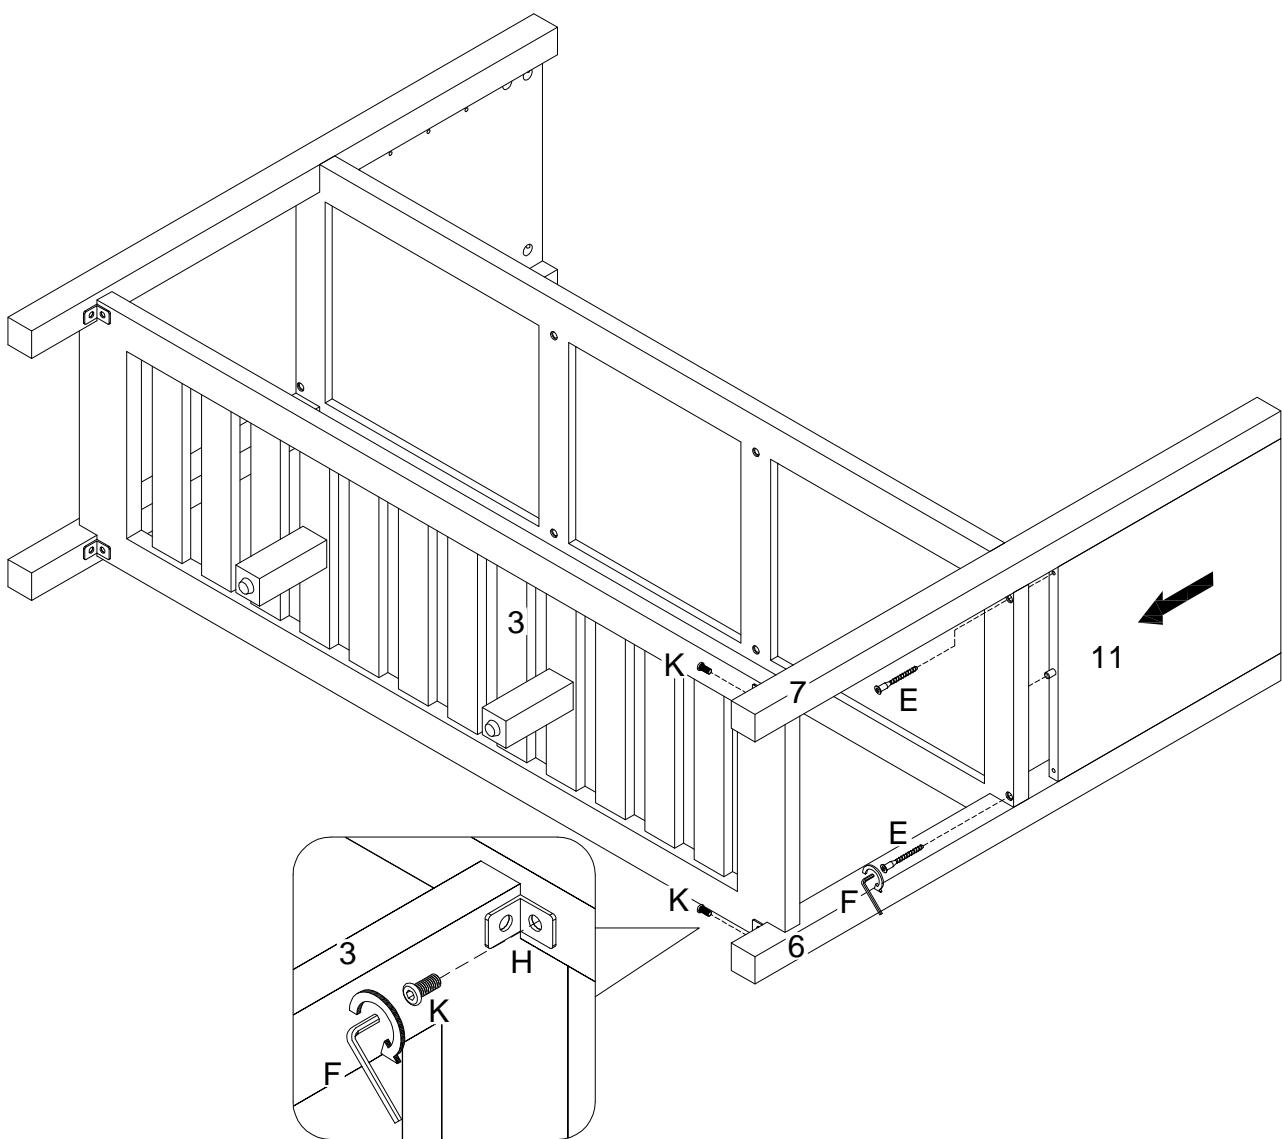


Use bolt (E) attach part (2) into part (11), then using bolt (K) attach L shape bracket (H) to parts (6,7) with hex key (F) as per diagram.

Step 9

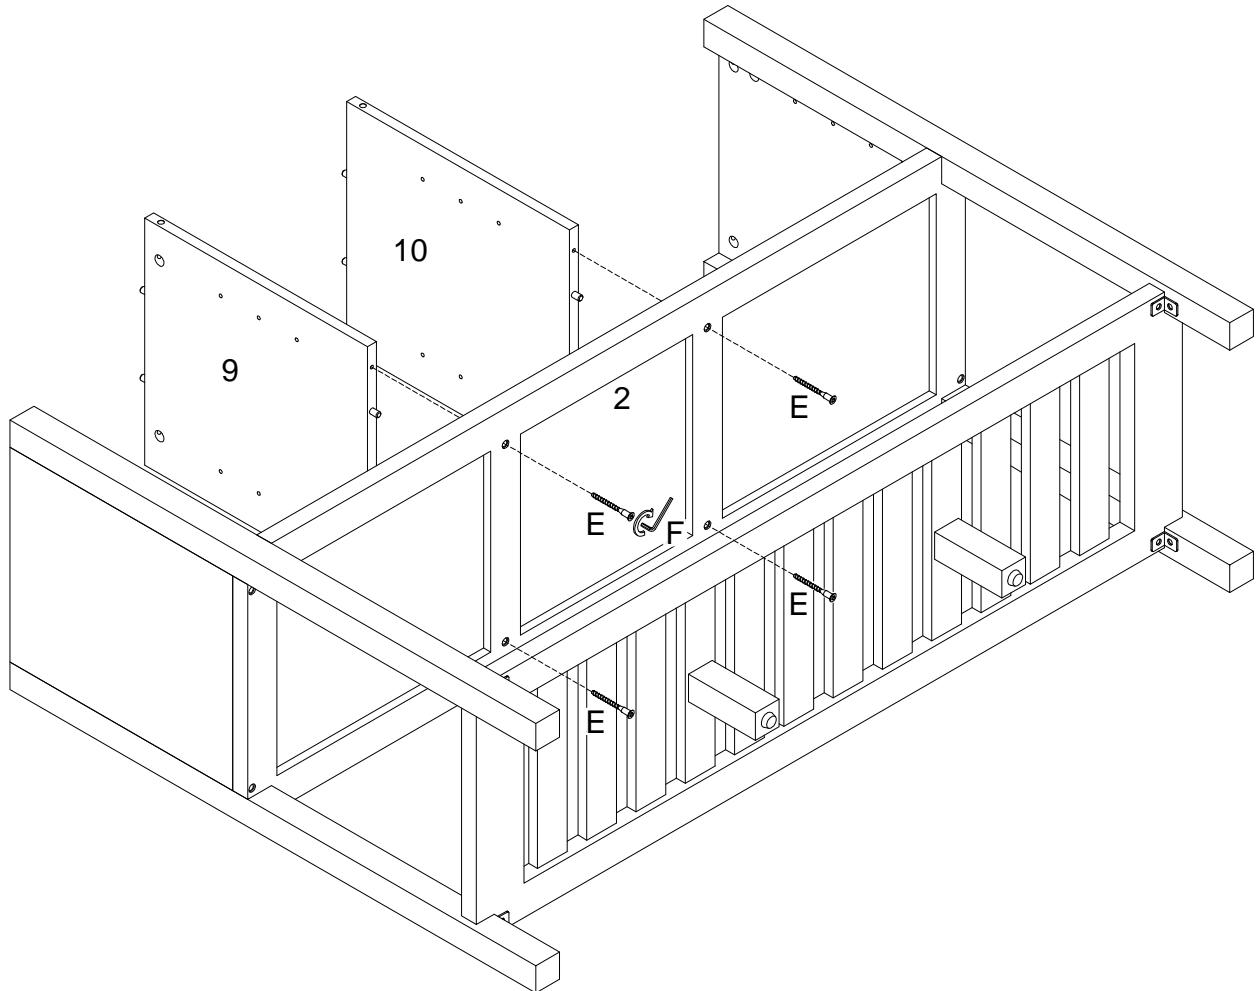


Using bolt (E) attach part (2) into parts (9,10) with hex key (F) as per diagram.

Step 10

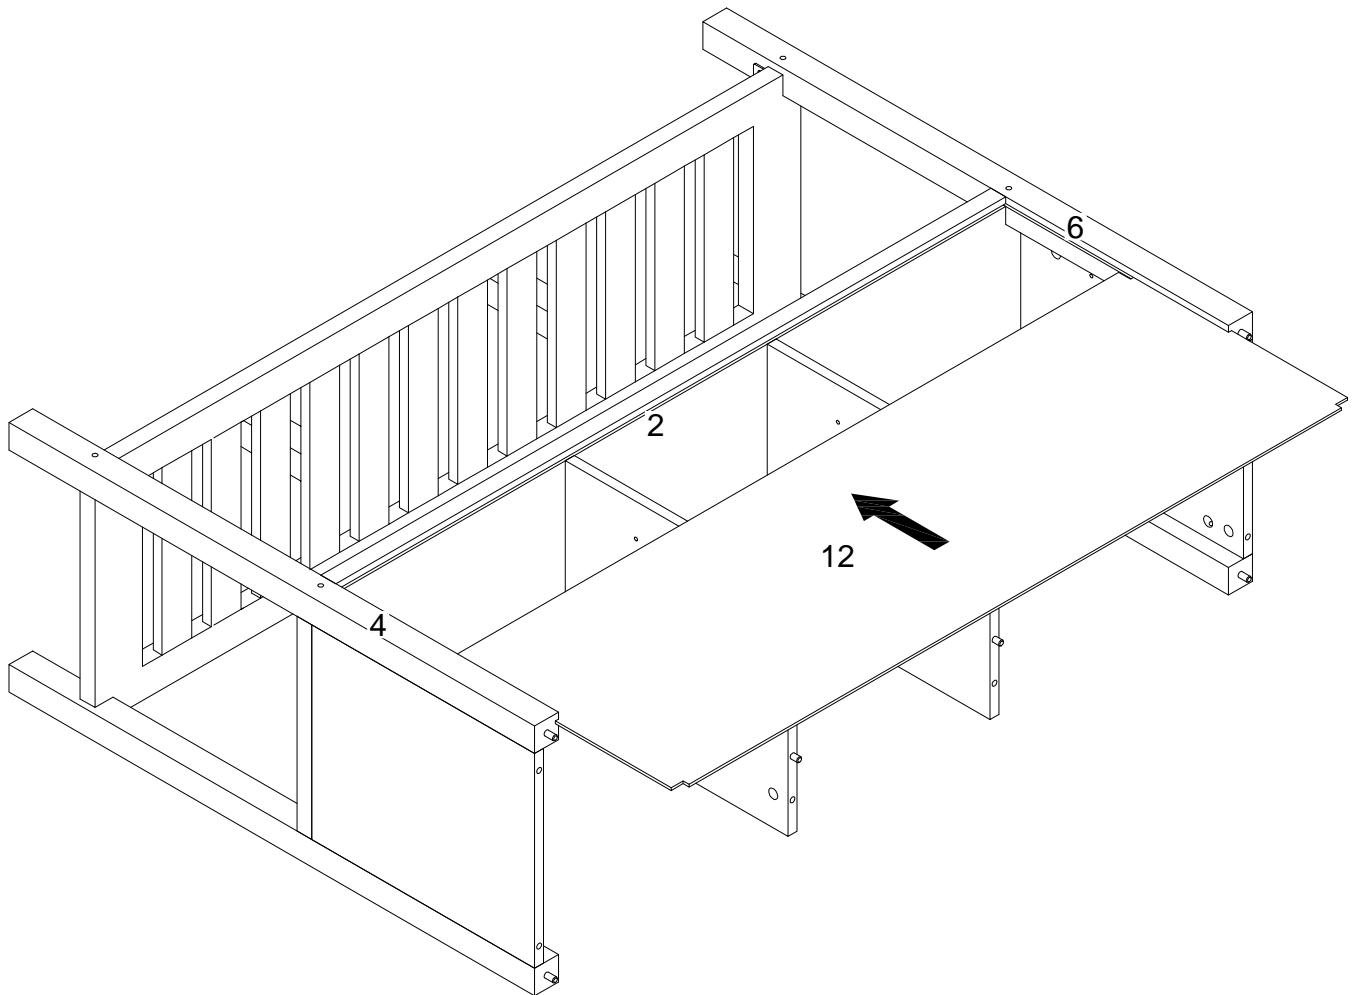


Put part (12) into parts (2,4,6) as per diagram.

Step 11

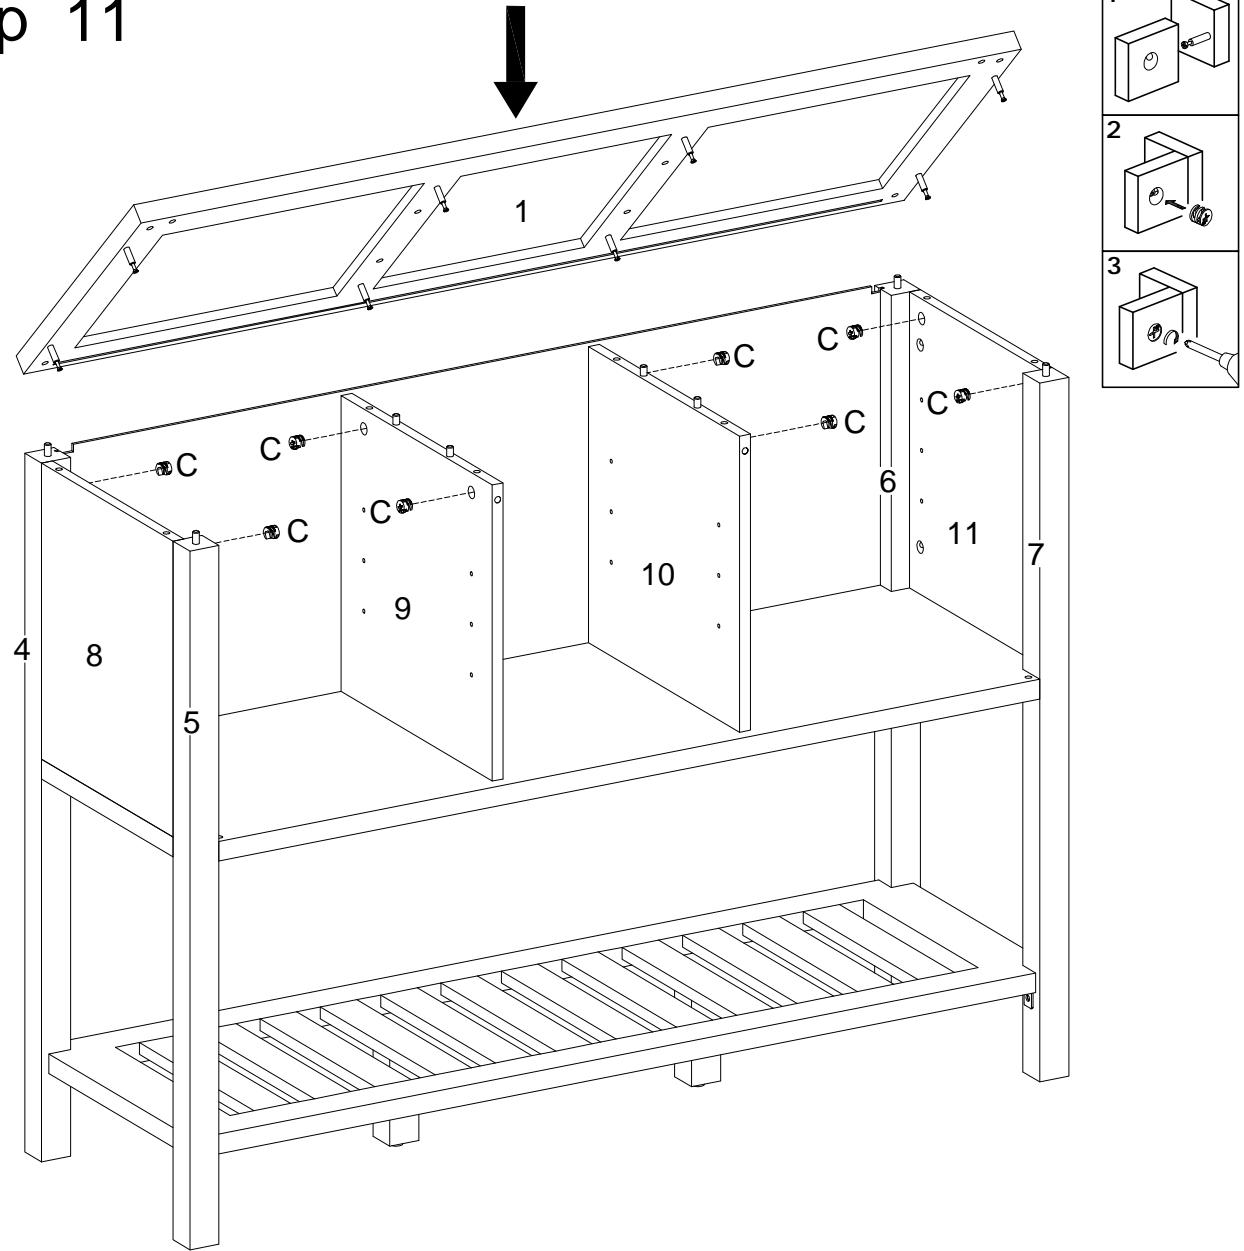


Using cam lock(C) secure part (1) to parts (8,9,10,11) with Philips head screwdriver as per diagram.

Step 12

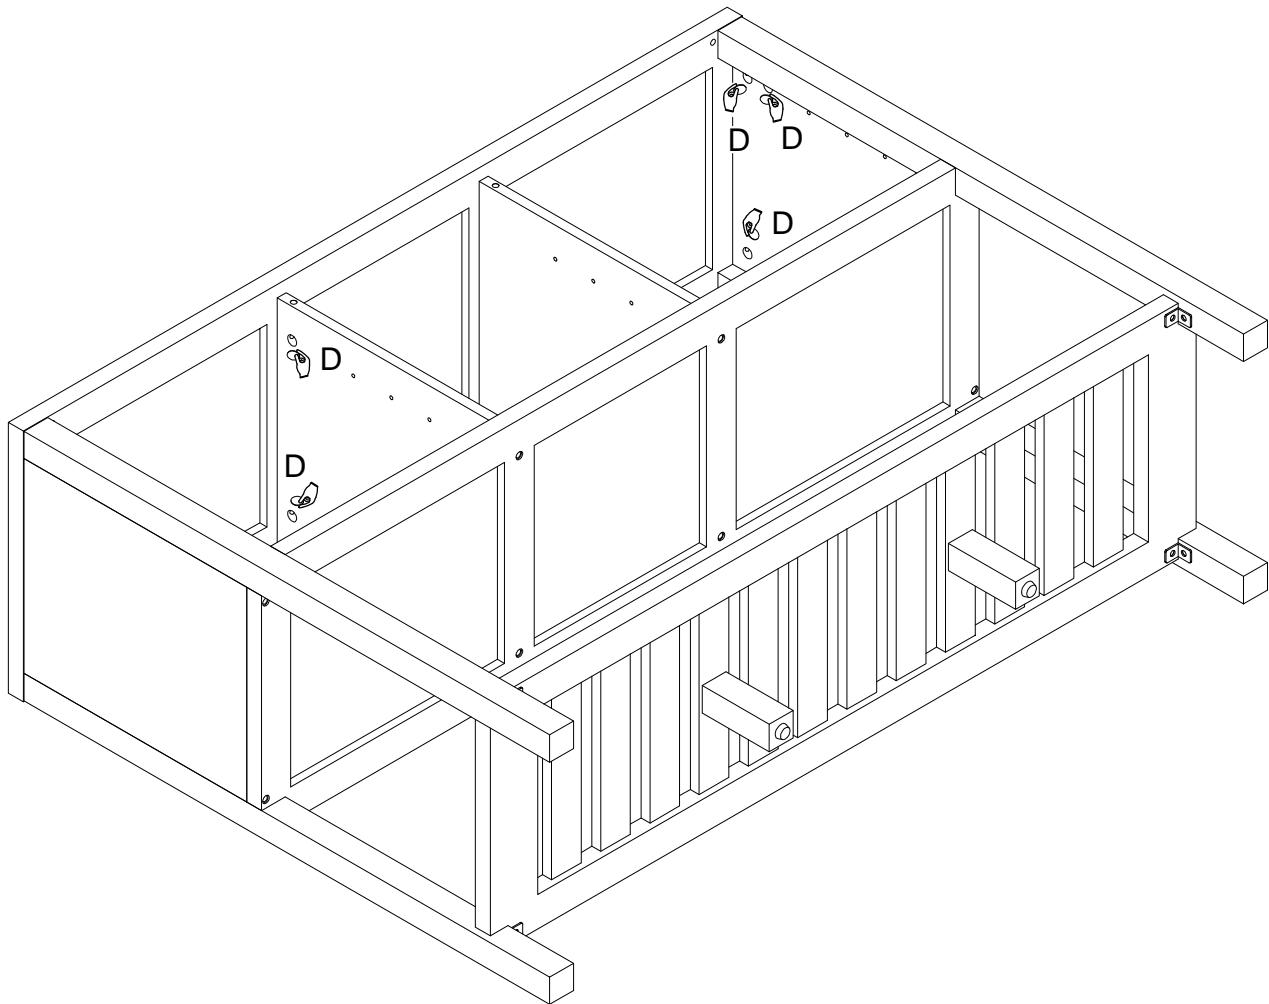

Place sticker (D) cover the holes as per diagram .


Step 13

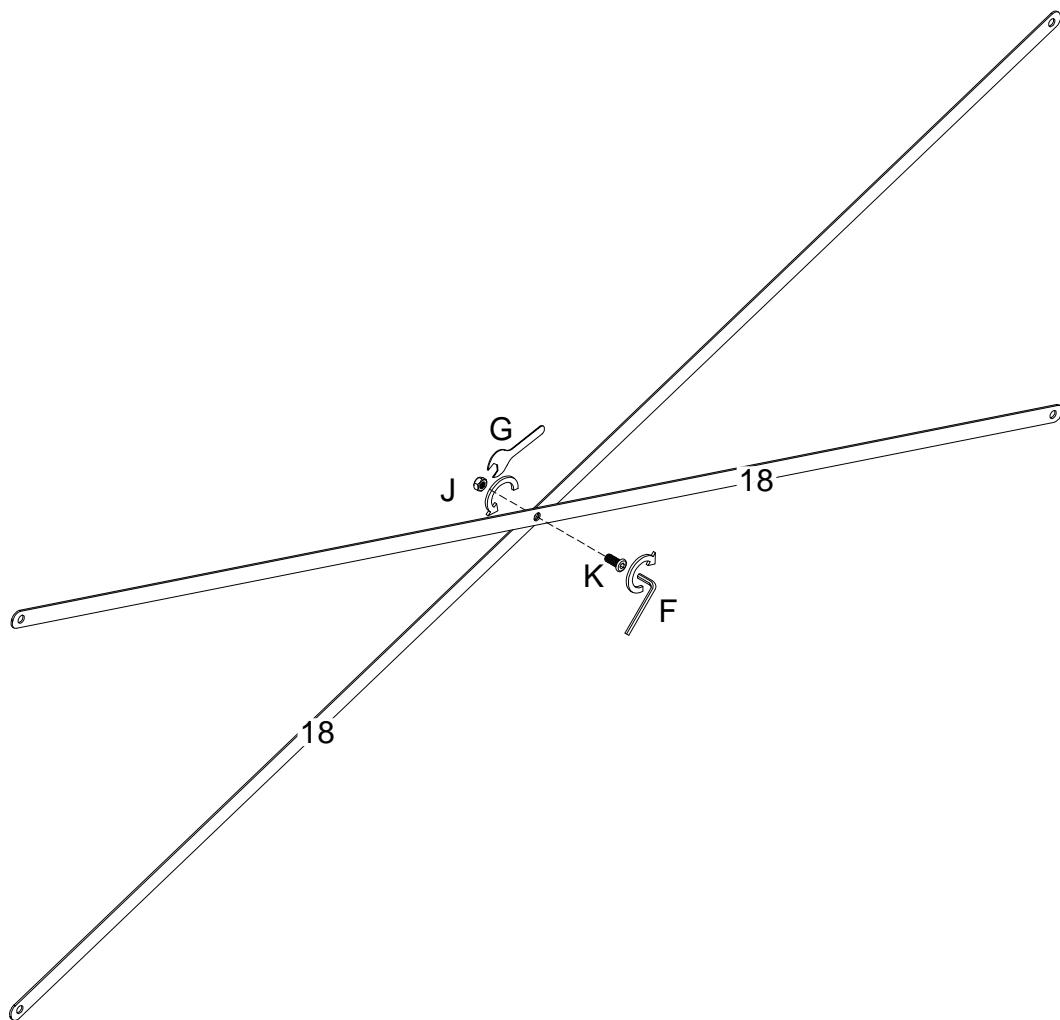

Using bolt (K) and nut (J) attach part (18) together ,then using wrench(G) and hex key (F) secure bolt (K) and nut (J) as per diagram.


Note: Do not fully tighten the bolt.

Step 14

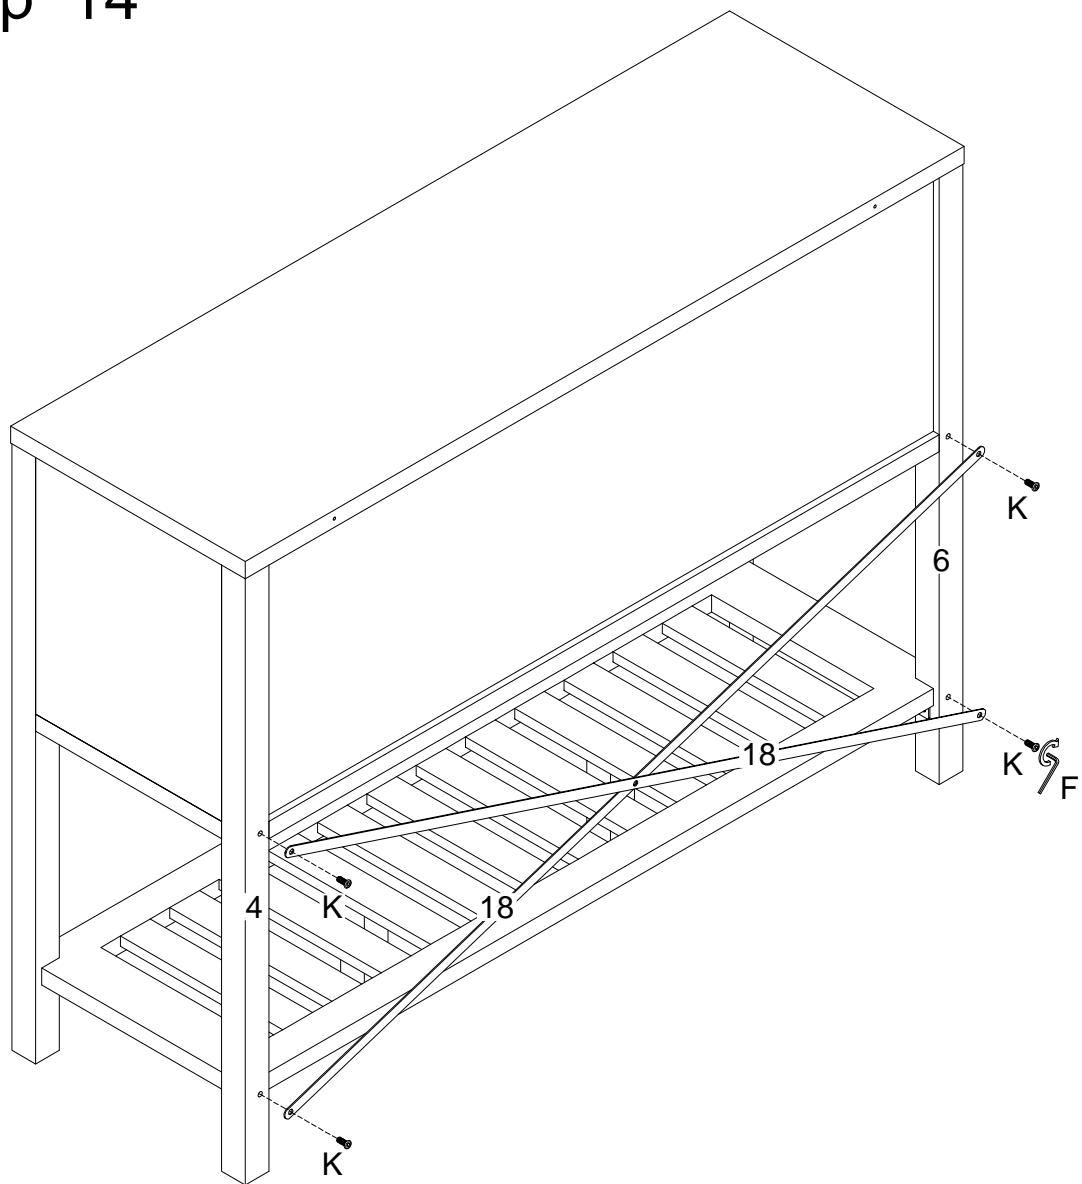


Using bolt (K) attach part (18) into parts (4,6) with hex key (F) as per diagram. Then tighten all the bolts.

Step 15

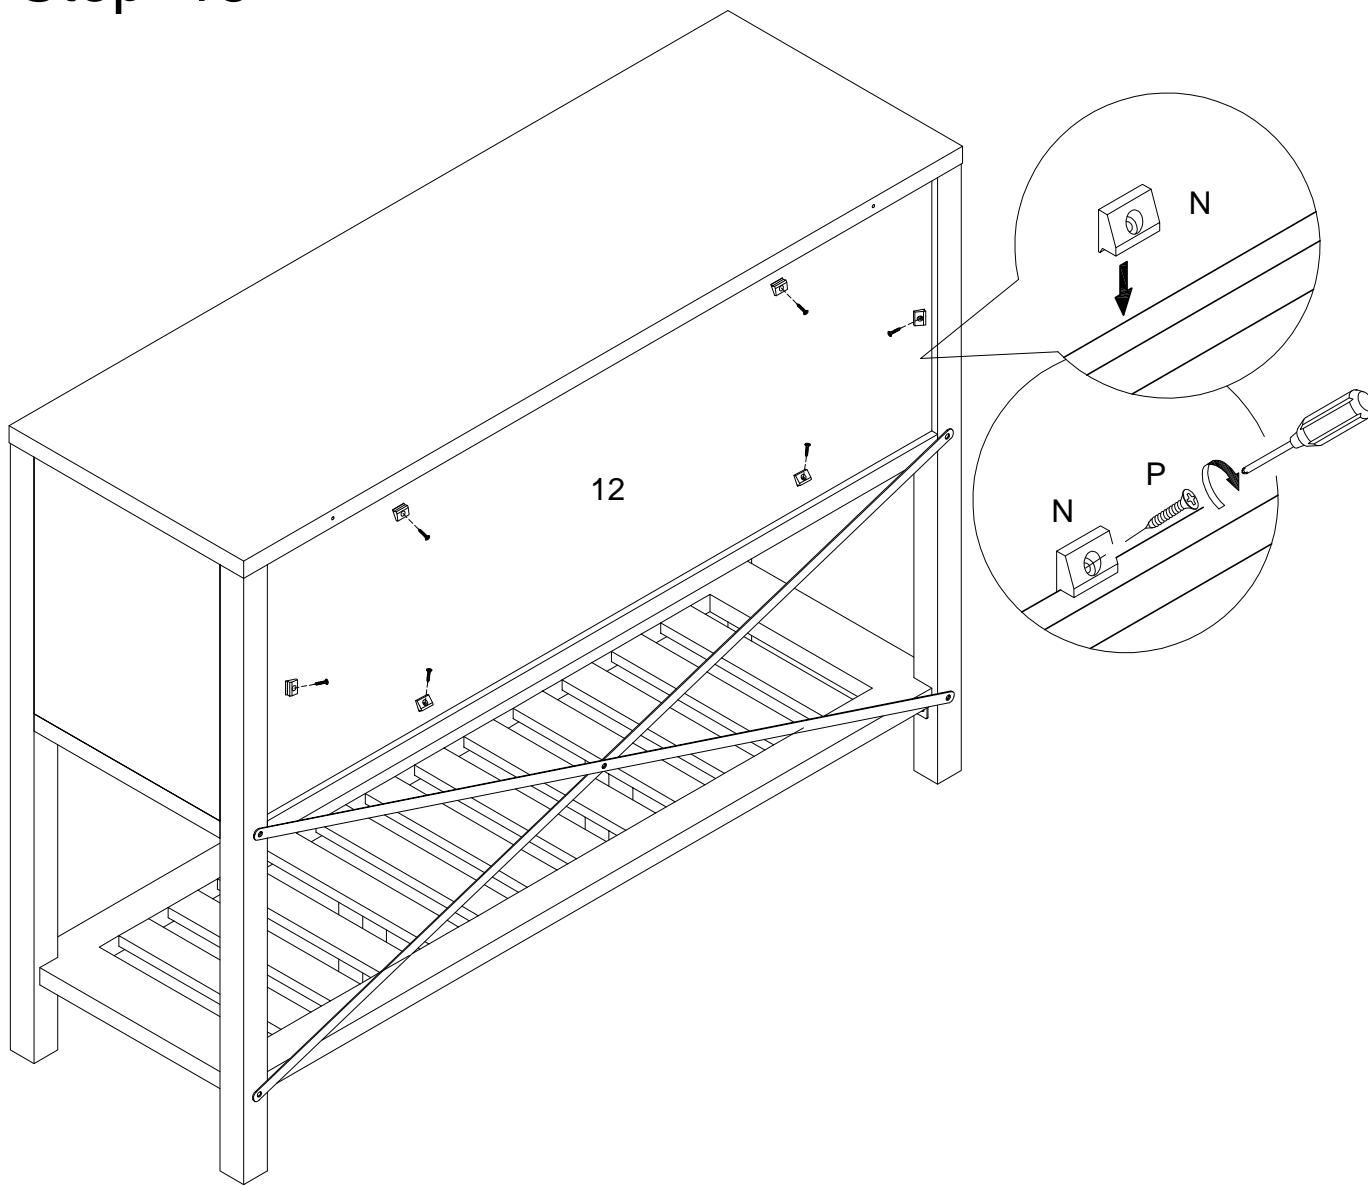


Using screw (P) secure plastic wedge (N) to part (12) with Philips head screwdriver as per diagram.

Step 16

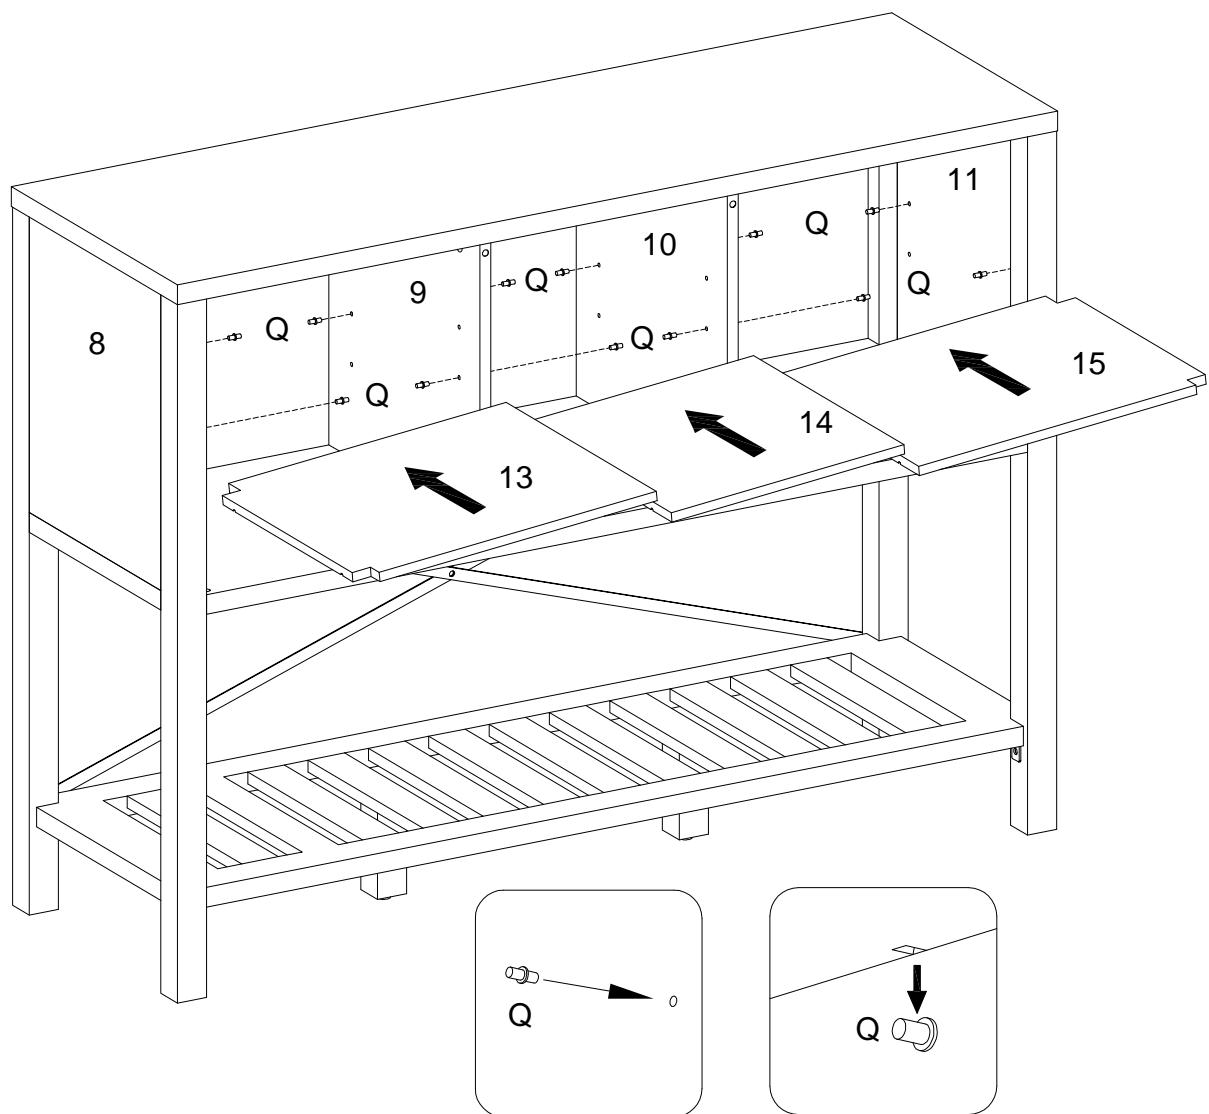


Insert shelf support pin (Q) into parts (8,9,10,11) as per diagram. Make sure you place the four shelf support pins (Q) in the same level. So the shelf is not titled .Put parts (13,14,15) to into unit as per diagram. Tilt and rest the adjustable shelf(13,14,15) into the shelf support pins .

Step 17

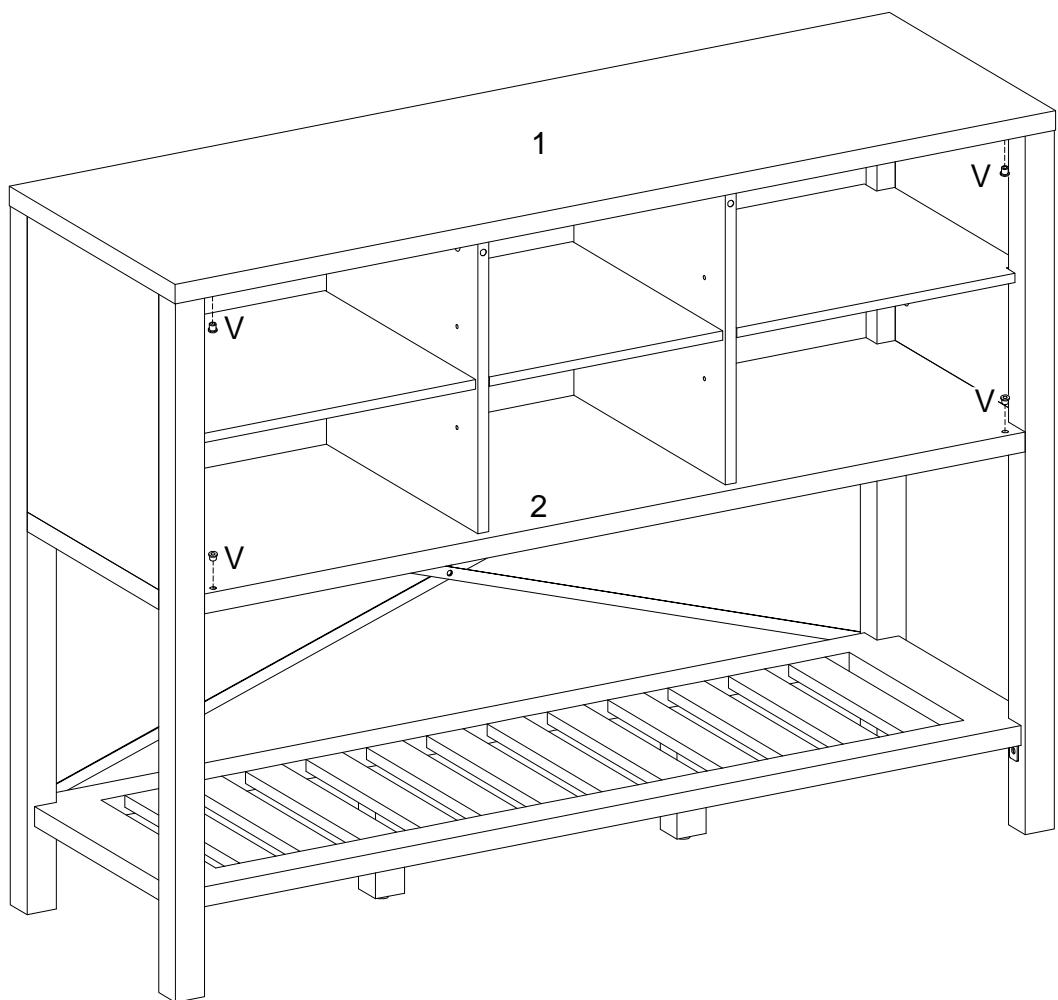


Place plastic pivot (V) into parts (1,2) as per diagram.

Step 18

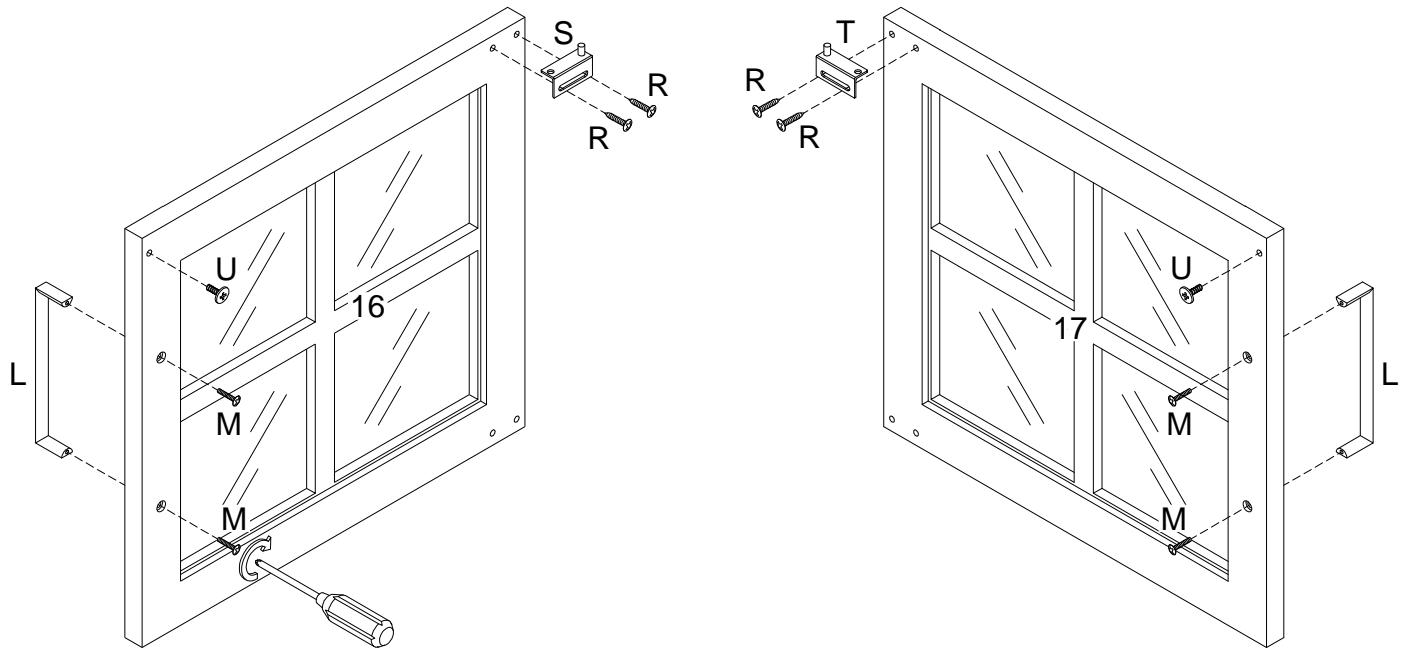


Using handle bolt (M) attach handle (L) into parts (16,17) ,and secure bolt (U) into parts (16,17) ,
Using screw (R) attach door hinge (S) to part (16) , door hinge (T) to part (17) with Philips head screwdriver as per diagram.

Step 19

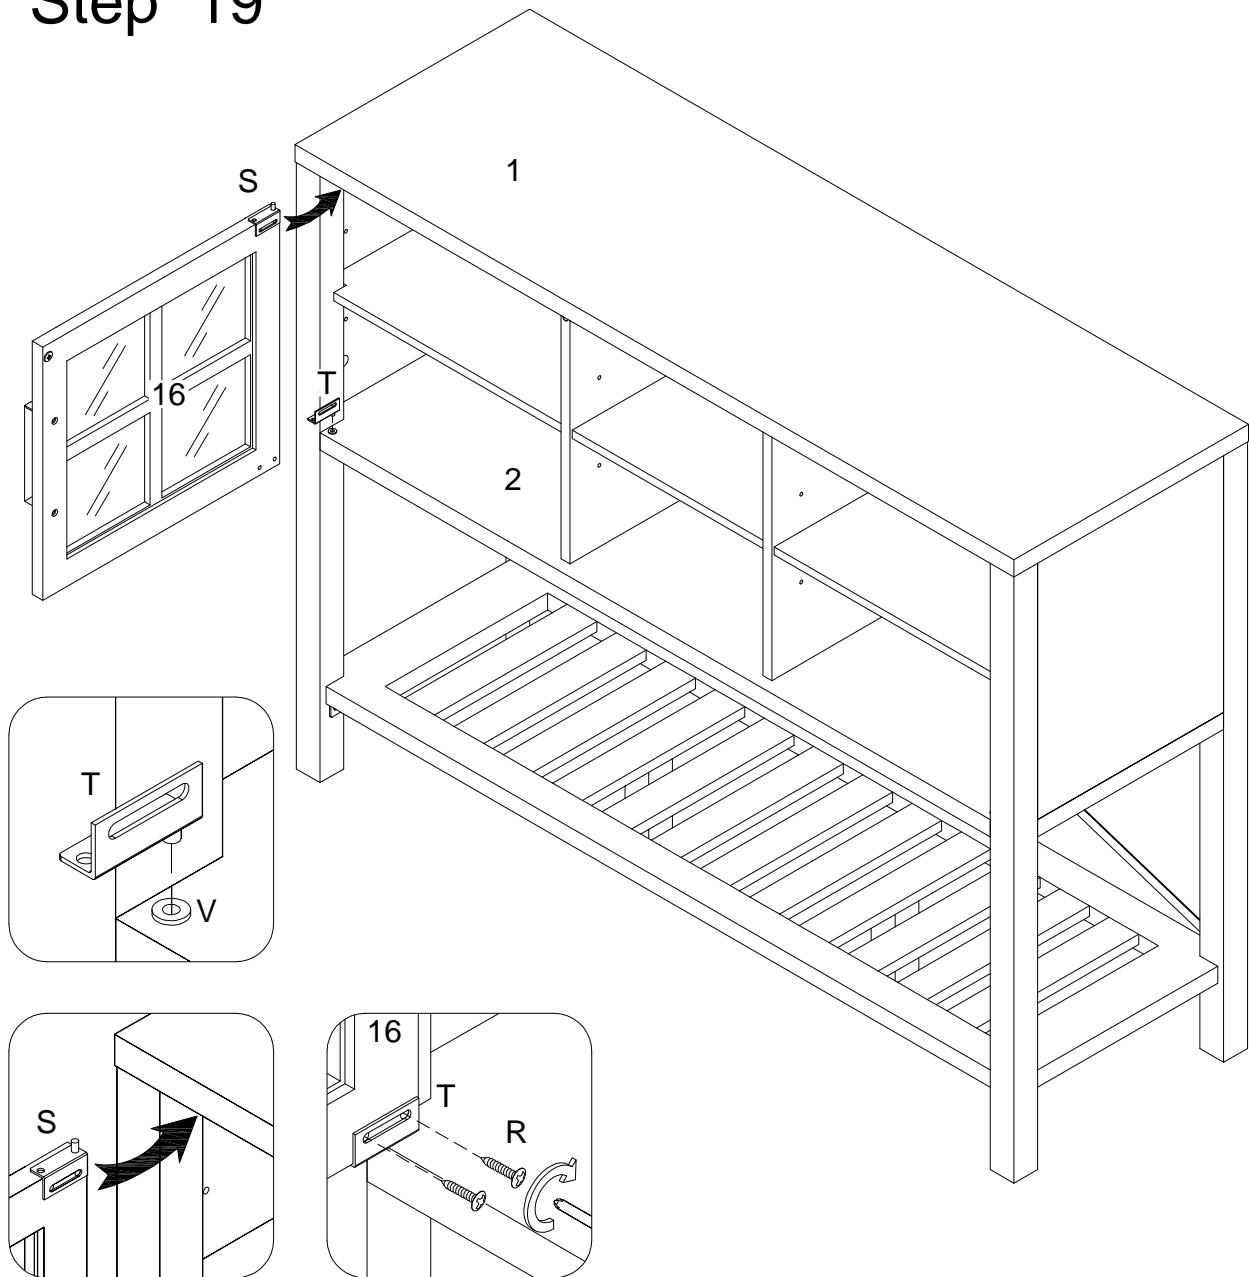


Pick up the door (16), fit up door hinge (S) into plastic pivot (V) to part (1) ,then using screw (R) secure door hinge (T) to part (16) to part (2) with Philips head screwdriver as per diagram.

Step 20

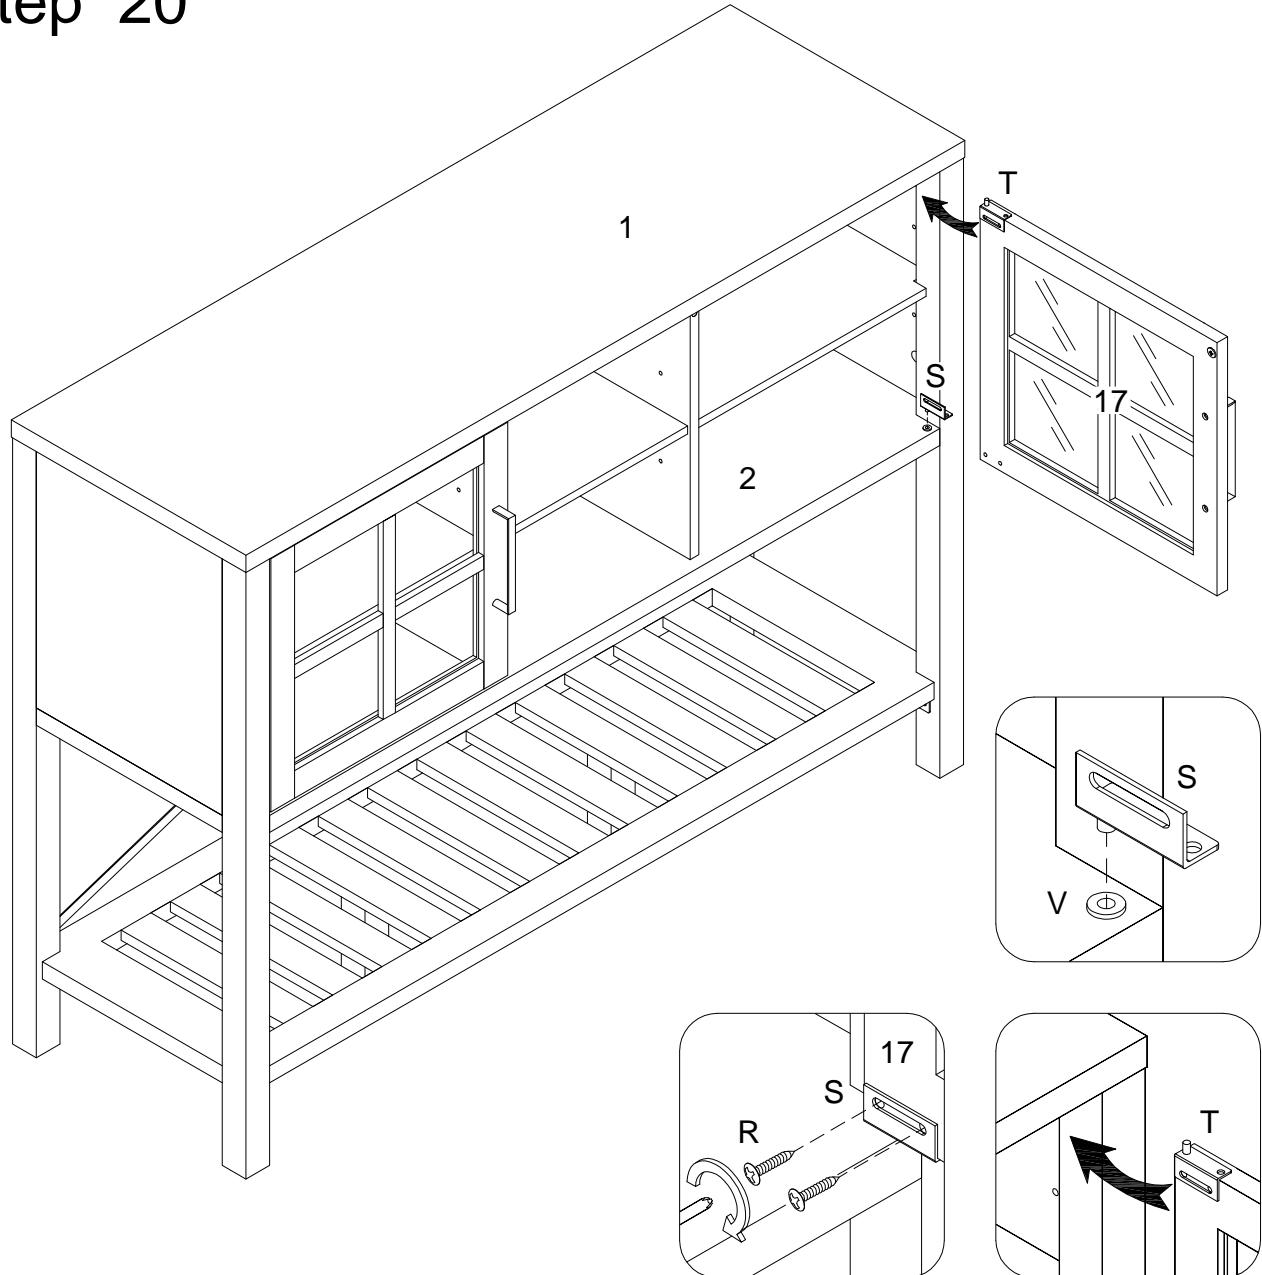

Pick up the door (17), fit up door hinge (T) into plastic pivot (V) to part (1) ,then using screw (R) secure door hinge (S) to part (17) to part (2) with Philips head screwdriver as per diagram.


Step 21

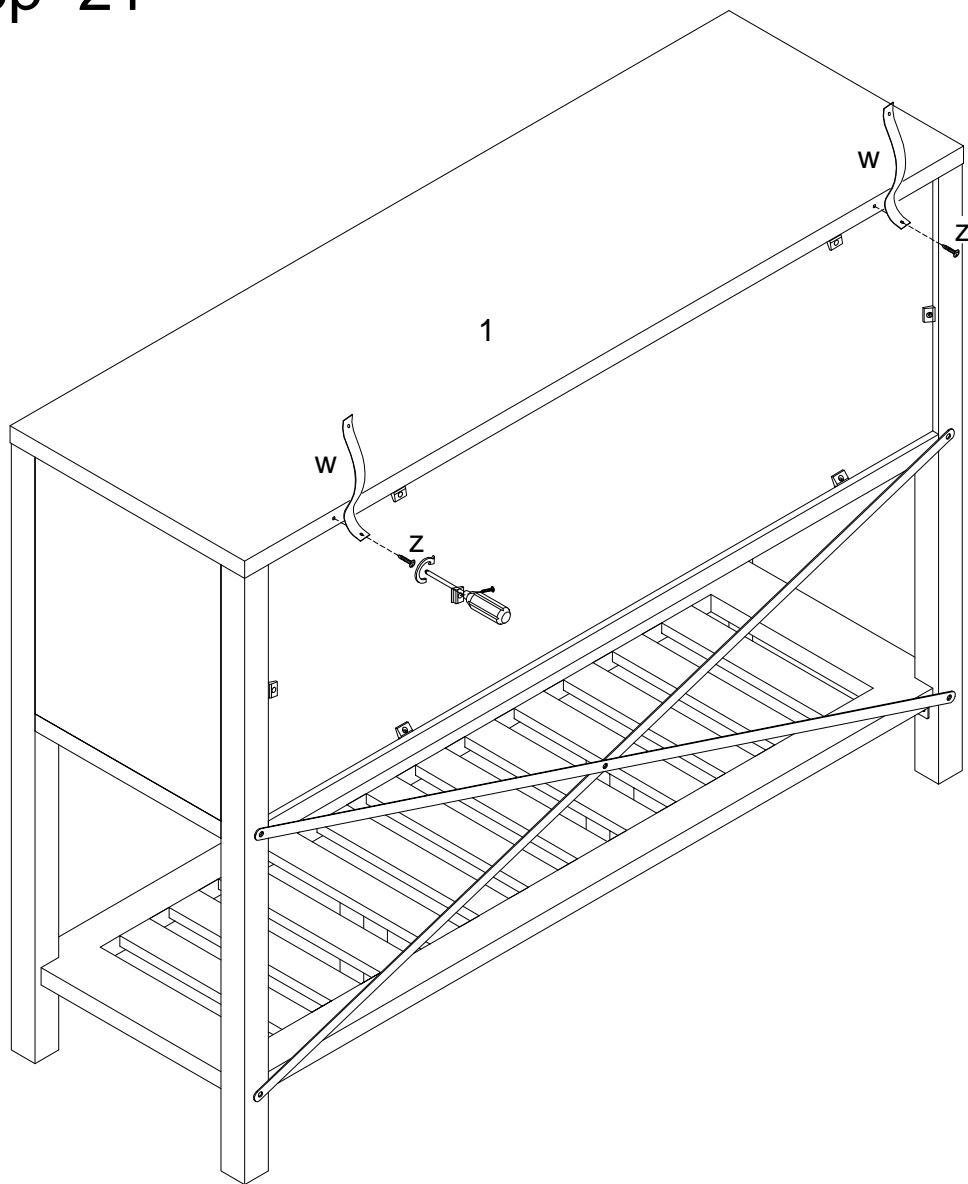

Using screw (Z) attach plastic strap (W) into part (1) with Philips head screwdriver as per diagram.


Step 22

WARNING

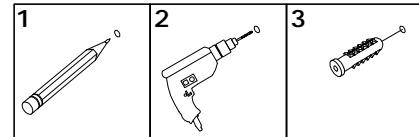


Serious or fatal injuries can occur from furniture tipping over. To prevent the furniture from tipping over we recommend that it is permanently fixed to the wall. Wall anchor and hardware are included with this product. Please make sure hardware is suitable for your walls before installing, as different wall materials may require different types of anchors.

Wall

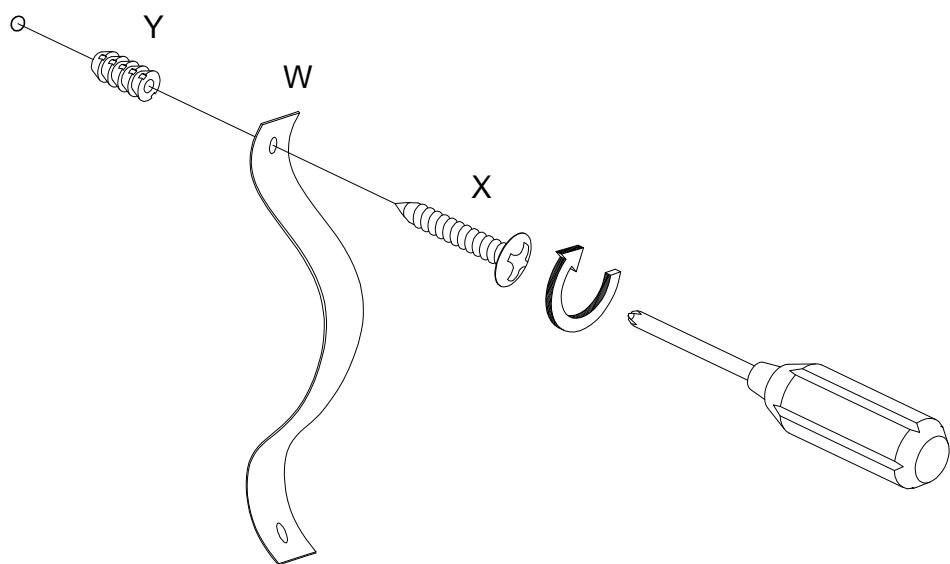


Using screw (X) attach plastic strap (W) into plug (Y) to wall with Philips head screwdriver as per diagram.

Step 23

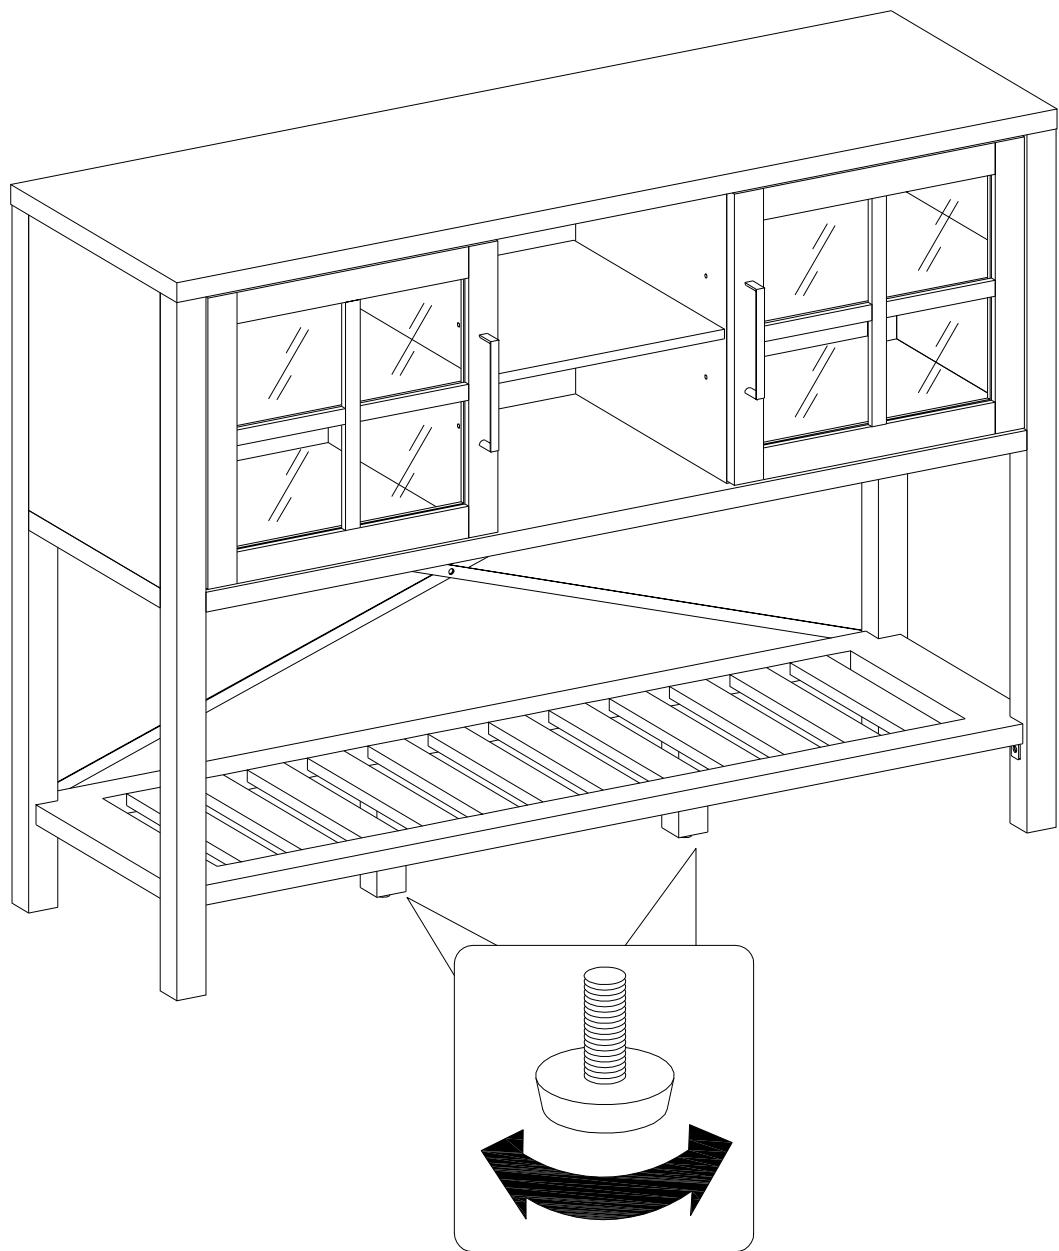

Position the assembled unit at the desired location .If necessary, adjust the floor levelers at the bottom of the support legs to the level the unit .

Step 24

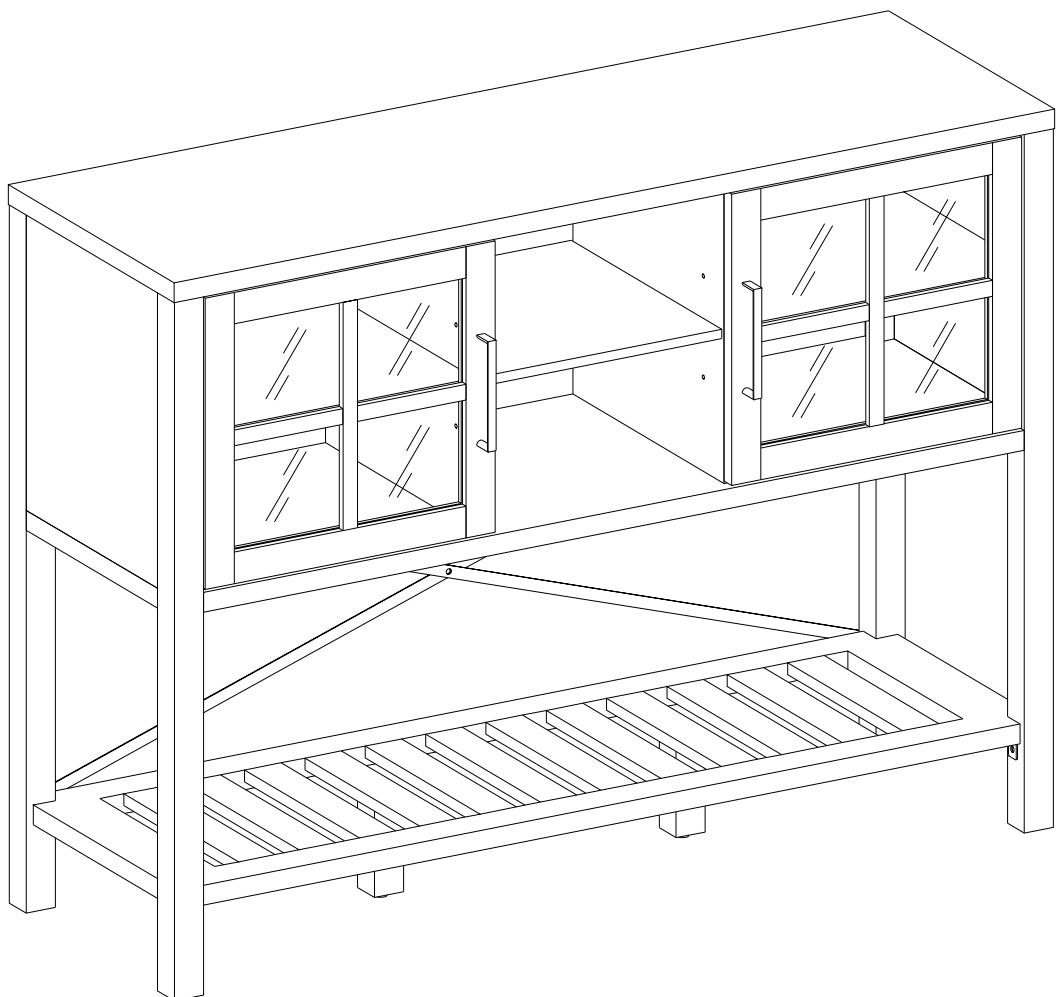

Final Assembly