





Shown with optional adjustable depth liner




Includes Wireless Remote Control

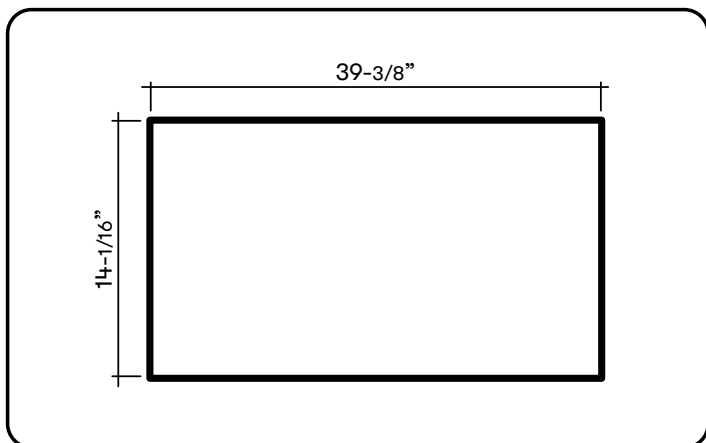


Cabinet Bottom Cut-Out Size (W x D): 39-3/8" x 14-1/16"

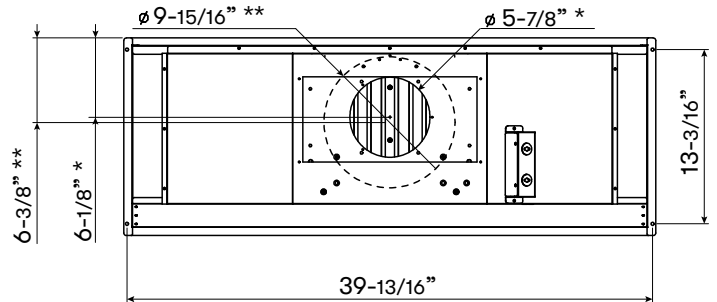

TOP

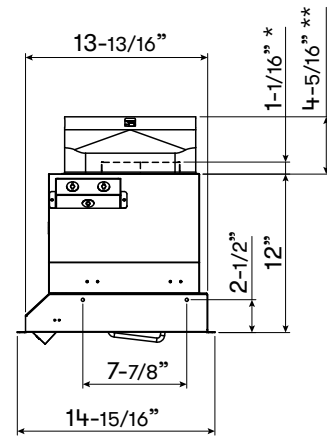

SIDE

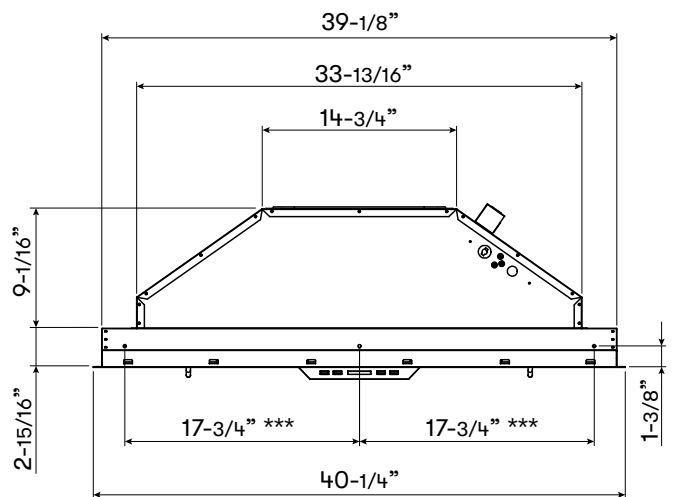

FRONT

\* 6" Round Ducting

\*\* 10" Round Ducting

\*\*\* Mounting holes measurements from rear

**MODEL**

Stainless Steel	AK8340ASX
Size	40in (40-1/4" x 14-15/16")

**BLOWER PERFORMANCE**

Internal Blower (CBI-290C)*	200 - 290 CFM, 1.4 - 3 sones
Internal Blower (CBI-390A)*	200 - 390 CFM, 1.4 - 5 sones
Internal Blower (CBI-600A)*	240 - 600 CFM, 1.8 - 6 sones
Dual Internal Blower (PBI-1100B)*	500 -1100 CFM, 3.5 - 8 sones
In-Line Blower (PBN-1000A)*	500 - 1000 CFM, sones NA
External Blower (CBE-1000)*	500 - 1000 CFM, sones NA

**FEATURES**

Controls	Electronic LCD
Speed Levels	3
Auto Delay-Off	Yes
Lighting	LumiLight LED with TruHue™, 6Wx2
Dual-Level Lighting	Yes
TruHue™	Yes
Filters	Pro Baffle x3
Wireless Remote Control Option	Yes, RF
Recirculating Option	No
ADA Compliant	Yes (with remote accessory)

**DUCT SPECIFICATIONS**

Vertical Single Internal Blower	6" Round
Vertical Dual Internal Blower	10" Round
Vertical In-Line/External Blower	10" Round
Horizontal	NA

**AC POWER**

Hood w/ CBI-290C	120V, 60Hz, Max. 1.3A
Hood w/ CBI-390A	120V, 60Hz, Max. 2.1A
Hood w/ CBI-600A	120V, 60Hz, Max. 2.6A
Hood w/ PBI-1100B	120V, 60Hz, Max. 5.8A
Hood w/ PBN-1000A	120V, 60Hz, Max. 5A
Hood w/ CBE-1000	120V, 60Hz, Max. 5.8A

**OPTIONAL ACCESSORIES**

48" Liner (17-3/8" - 19-7/8" Depth)	AK083480AS
48" Liner (20-1/4" - 22-3/4" Depth)	AK083481AS
Wireless Remote Control	RC-0002

<b>MOUNTING HEIGHT RANGE***</b>	24" - 36"
---------------------------------	-----------

<b>WARRANTY</b>	3 years parts, 1 year labor
-----------------	-----------------------------

\*Blower sold separately.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**TruHue™**

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.

Specifications subject to change, check zephyronline.com for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JAN26.0101

